Storm Interface

Secured, sealed and toughened data entry devices

2210-T/B
SERIES USB KEYBOARDS

Compact format, vandal resistant USB 2.0 keyboards with integral trackball

STORM 2210-T/B keyboards are constructed to survive in exposed, unsupervised situations.

Storm's proprietary switch technology delivers a responsive key action ensuring rapid and reliable data entry in hostile environments. A hardened stainless steel front plate and captive, cast metal or high contrast, high impact polymer keys ensure the keyboard stands up to hard use, abuse and vandalism. Now offered with bright white keytops to achieve maximum visibility and accessibility. High contrast laser engraved keytop graphics also deliver improved resistance against character wear and fading, even in exposed outdoor locations. A water and impact resistant trackball makes this keyboard an ideal data entry solution for any menu based 'point & click' application.

- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather resistant (IP65)
- Integral USB 2.0 Interface via single USB 2.0 cable (supplied)
- Optional fixing kit for under panel installation (sold separately) or anti-slip foot kit for benchtop use (also sold separately)
- RFI / EMI Protection in accordance with current European and U.S. directives
- Operational life of more than 4 million cycles per key
- Resistant to most commonly used cleaning agents
- Integral 38mm USB 2.0 compatible trackball with left & right click keys
- 63 keys
- Compact format: 360.0 mm x 118.5 mm x 38.5 mm

RETAIL
CORPORATE
CIVIC
INDUSTRIAL

Electrical

EMC Emissions:	EN55023: 2015 Class B Limit
EMC Immunity to ESD:	EN55024: 2010
EMC Immunity to radiated fields:	EN55024: 2010
Electrical Safety:	EN60950, UL60950
Communication:	Industry standard USB 2.0 interface
Supply voltage:	+5V nominal (5.5V to 4.75V)
Supply current:	60mA (with 2 LEDs illuminated)

Environmental

Sealing:	EN60529 (sealing to IP65)
Trackerball sealing:	IP65 stationery IP54 rotating
Weather resistance:	-20°C to +70°C operating (dry)

Mechanical

Impact resistance:	20 Joules via 50mm dia steel striker
Key pitch:	19mm
Key size:	11mm square
Actuation force:	100g nominal

Storm Interface

Secured, sealed and toughened data entry devices

Dimensions

360.0mm
350.5 mm
118.5 mm

17.5 mm   34.5 mm
13.3 mm
109.0 mm
4.4 mm

Specifications
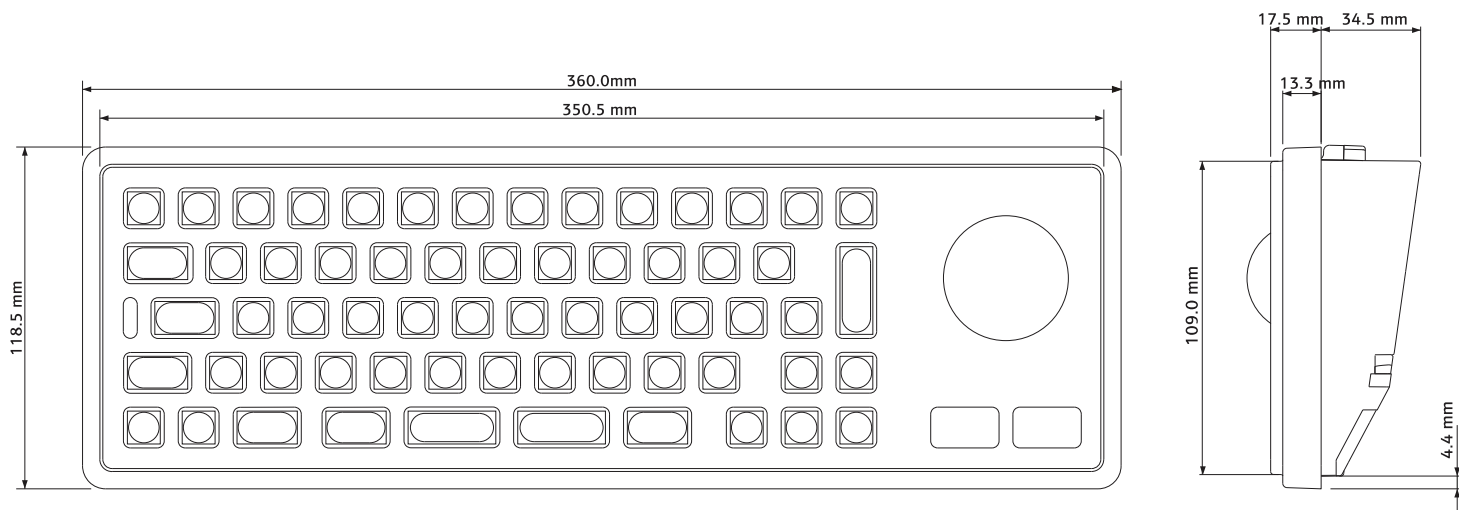
Keyboard Weight:

with cast metal keytops/trackball	**2.20 kg**
with polymer keytops/trackball	**1.80 kg**
Underpanel cut out aperture	**351.0 x 109.5 mm (11.0 x 4.3 in.)**
Max panel thickness	**2mm**

View showing rear of panel with dimensions of stud positions and panel cut out details

All dimensions in mm.

M3 x 20mm long steel weld studs or equivalent

351.0+0.25
R5.0
124.0 REF.
109.5+0.25
7.25+0.5 TYP.
27.5
90.0
205.0
271.5
338.0
365.5
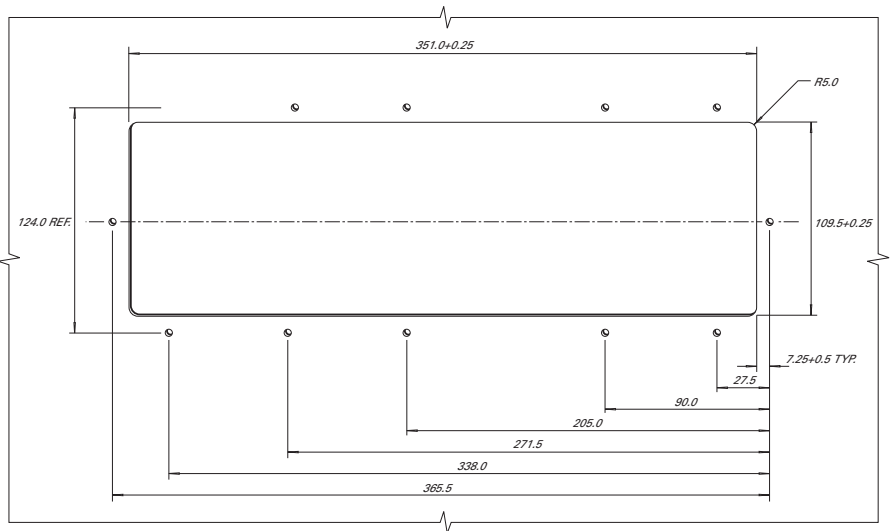
Options

Build Style	**Vandal resistant (stainless steel top plate)**
Keytops	**Cast metal keytops, chrome plated** **High impact polymer white keytops with high contrast black laser marked characters**
Encoder	**USB 2.0**
Languages	**English UK, English USA, French, Spanish, German**

2210-T/B Series USB 2.0 Keyboards	Part Numbers
White Polymer Keys with Trackball, UK	2210-55221
White Polymer Keys with Trackball, USA	2210-55222
Engraved Metal Keys with Trackball, UK	2210-35231
Engraved Metal Keys with Trackball, USA	2210-35232

Accessories	Part Numbers
2200 underpanel fixing kit (contains clips)	2210-MK000
2200 foot kit – required for benchtop use	2200-FK000
Keyboard USB 2.0 cable (straight 2.5m long)	1200-00200

For more information & to order:
www.storm-interface.com

CE

bsi.

UKAS MANAGEMENT SYSTEMS
003

FM 39602

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Input Devices *category:*

Click to view products by Storm Interface *manufacturer:*

Other Similar products are found below :

80260-00 81485-28 81521-08 FKB4720-103 84250-26 84980-04 84S-AC1-000 JD-0700EU-2 JM-0800-2 JW-T0100 89498-13 89758-05 89886-26 89941-00 G80-3000LSCEU-2 MJ0FGGRY JM-0800-0 84S-BB1-004 81601-26 UL21KMZQ G8011900LPMUS0 G84-4700LUCUS-0 81485-26 84105-13 V400-W24 5M V400-W23 5M G84-5200LCMEU-2 DT2257X20V00GRY 84Z2029-78 84Z2029-79 V400-W23P 5M VW3A8151R20U V400-W24 15M LT1332D V400-W24 10M V400-W24P 15M V400-WM0 1M V400-W24P 10M V400-W23P 10M TCS-1492OP V400-W23 3M LT1372D LP1007EXXH00R DT2253X20V00BLK 100133BX EZ08-230013 81248-04 89887-26 90215-00 HB110C3NWBNA