

# storm 6000 Series Keypads



## Numeric data entry in exposed public environments

- Rugged, reliable and responsive data entry
- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather resistant (IP65)
- Large buttons for clarity and ease of use
- Permanent, high contrast, laser engraved keytop graphics
- 4 row x 4 column matrix circuit format
- Suitable for use by those with mobility or sensory impairments
- Raised tactile symbols on coloured function keys
- Raised "home pip" on the "5" key
- Overall dimensions: 124.0 mm x 118.5 mm (excluding interface pod on rear face)



[www.storm-interface.com](http://www.storm-interface.com)

Storm Interface products include technology protected by international patents and design registration. All rights reserved.



# 6000 Series keypad for public environments





## UK Keypad Layout

## USA Keypad Layout




## Function Key Colours

CANCEL	Red	?	Blue
CLEAR	Yellow	ENTER	Green

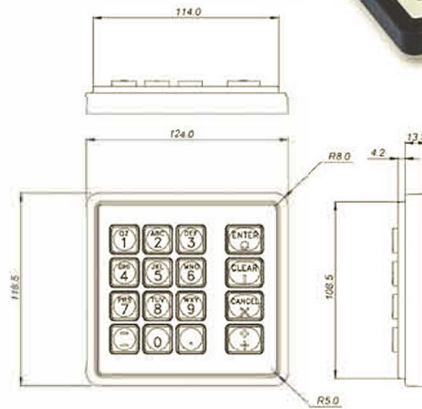

## Matrix Keypad Connections

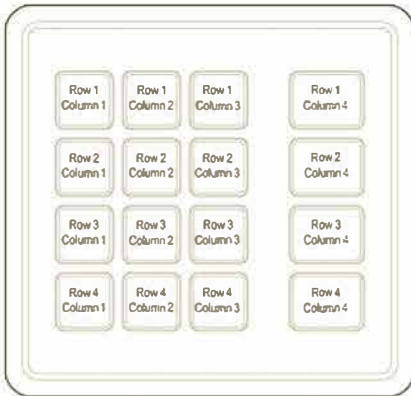

## Contact Matrix

PINS	ROW / COLUMN
1	Not used
2	Tamper
3	R1
4	R2
5	C1
6	C2
7	C3
8	C4
9	R4
10	R3
11	NC
12	Tamper
13	Not used

## CONTACT CIRCUIT SPECIFICATION

Contact	
Operating Voltage	24V dc (max)
Operating Current	50 mA (max)
Circuit Resistance	<500 Ohms
(when contact closed)	

## Contact Connections (viewed from rear of keypad)

PINS	• • • • • • • • • • • • • • • •
PIN NO.	13 12 11 10 9 8 7 6 5 4 3 2 1

## Specifications

Vandal Resistant	20J BS EN 60068-2-75:1997
Weather Resistant	IP65
Large Buttons for clarity and ease of use	15mm square
Function Key Buttons	15mm x 20mm
Responsive key action	travel 1.5mm, actuation force 130gm
High contrast laser engraved graphics	designed to meet with current ADA and DDA recommendations
Raised tactile symbols on function keys	designed to meet with current ADA and DDA recommendations.
Panel Cutout	109.5 x 115.0 x R 5mm corners (tols ± 0.2mm)
Operating Temp	-20°C to +60°C
Matrix Output	(Order cables separately)

- Meets CE and UL requirements for Product Safety
- Meets CE and FCC requirements for EMC
- Compatible with 420 Series RS232 Encoder
- Panel Mount Gasket included

Part No.	Item
6000-21001[x]	Keypad 6000 Series 16 way Matrix Output, UK layout
6000-21002[x]	Keypad 6000 Series 16 way Matrix Output, USA layout

## Accessories [x] denotes packaging variant

Part No.	Item
6000-MK00[x]	Underpanel Mounting Clips
4200-00[x]	420 Series, RS-232 Encoder (requires connection via a cable which Storm does not supply)

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.



FM 39602



Storm is a trademark of Keymat Technology Ltd  
Storm Interface is a trading name of Keymat Technology Ltd  
Storm Interface products include technology protected by international patents and design registration. All rights reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Input Devices](#) category:*

*Click to view products by [Storm Interface](#) manufacturer:*

Other Similar products are found below :

[80260-00](#) [81485-28](#) [81521-08](#) [FKB4720-103](#) [84250-26](#) [84980-04](#) [84S-AC1-000](#) [JD-0700EU-2](#) [JM-0800-2](#) [JW-T0100](#) [89498-13](#) [89758-05](#)  
[89886-26](#) [89941-00](#) [G80-3000LSCEU-2](#) [MJ0FGGRY](#) [JM-0800-0](#) [84S-BB1-004](#) [81601-26](#) [UL21KMZQ](#) [G8011900LPMUS0](#) [G84-](#)  
[4700LUCUS-0](#) [81485-26](#) [84105-13](#) [V400-W24 5M](#) [V400-W23 5M](#) [G84-5200LCMEU-2](#) [DT2257X20V00GRY](#) [84Z2029-78](#) [84Z2029-79](#)  
[V400-W23P 5M](#) [VW3A8151R20U](#) [V400-W24 15M](#) [LT1332D](#) [V400-W24 10M](#) [V400-W24P 15M](#) [V400-WM0 1M](#) [V400-W24P 10M](#) [V400-](#)  
[W23P 10M](#) [TCS-1492OP](#) [V400-W23 3M](#) [LT1372D](#) [LP1007EXXH00R](#) [DT2253X20V00BLK](#) [100133BX](#) [EZ08-230013](#) [81248-04](#) [89887-26](#)  
[90215-00](#) [HB110C3NWBNA](#)