

NavPad™ Audio Equipped



provide improved accessibility for those with impaired vision, restricted mobility or limited fine motor skills. Kiosks, ATMs, ticketing machines and voting

Storm Assistive Technology Products

terminals usually present information about available products and services via a visual display or touch screen. NavPad™ is a highly tactile interface that improves accessibility, making audio navigation and selection of screen based menus possible. An audio description of available menu options is transmitted to the user through a headset, handset or cochlea implant. When the desired menu page or menu option is located it can be selected by the press of a distinctive tactile button. Successful implementation of the NavPad™requires a compliant host application featuring synthesized or recorded human voice audio-tags.

NavPad™ was developed in association with the Trace Research & Development Center with support from the University of Wisconsin. NavPad™ is a compliant tactile interface device for use as part of an ADA audible menu navigation system or EZ-Access® implementation.



• Available in standard 6 key and 8 key configurations to suit most applications.

- Weather resistant.
- Keytop colours, shapes and tactile symbols make them readily identifiable by both sight and touch.
- Codes transmitted by key presses can be set/customised via configuration utility software (for Windows PC).
- Key press confirmation beep can be enabled/disabled and duration set via configuration utility software (for Windows PC).
- Brightness of the audio jack socket illumination can be set via configuration utility software (for Windows PC).
- APIs and Utility Software for Nav-Pad™ configuration and test can be downloaded from storm-interface.com

Storm, Storm ATP, Storm Interface, NavPad and Audio-Module are trademarks of Keymat Technology Ltd. All rights reserved. EZ Access® is a trademark of the Wisconsin Alumni Research Foundation.



Vibration & Shock: Impact Resistance: Operational temperature: Weather Resistance:

Performance

Operational Key Life: Certification:

Specification

Rating: Audio:

Connection:

Ground:

Panel Cutout

Underpanel Seal

ETSI 5M3 IK09 (10J Rating) -20°C to +70°C (dry) IP65 (when panel mounted)

>4 million cycles per key CE / FCC / UL

5V +_0.25V (USB 2.0) Mini USB B Socket 3.5mm Audio Jack Socket (Illuminated)

100mm Earth Wire with M3 Ring Terminal 109.5mm x 95.5mm 5mm Radius Corners 1.2 – 2mm panel thickness

(recommended)

Included






NavPad™ **Audio Equipped**

NavPad™ Keypads

with audio processor and illuminated audio jack socket



8 Keys with integral **USB** interface

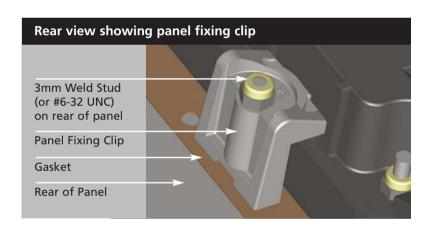



6 Keys with integral **USB** interface

Storm NavPad™ keypads are constructed to survive in exposed or hostile outdoor environments the keypads will withstand heavy use and abuse. They are sealed against the ingress of liquids and dust to survive regular wash down and sanitation procedures. NavPad™ keypads feature an integral USB interface to ensure hassle free, single cable connection to the host system. (Please note: The USB cable is supplied separately).

The keypads include an advanced audio processor and illuminated 3.5mm audio jack socket. This to facilitate connection of a headset or handset. These fully integrated audio equipped keypads enumerate as a combination Advanced Audio and HID Keyboard device, eliminating any requirement for specialised interface software.

NavPadTM Keypad Range

8 Key format, USB Interface, Audio Equipped 6 Key format, USB Interface, Audio Equipped

Part Numbers

F708-23001 EZ06-23001

• USB Cable fitted with 90° angled Mini-B male connector (to keypad) and USB-A male connector (to host system)

• Set of Fixing Clips

Part Numbers

4500-01

6000-MK00







For more information & to order: www.storm-interface.com











X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Input Devices category:

Click to view products by Storm Interface manufacturer:

Other Similar products are found below:

80260-00 81485-28 81521-08 FKB4720-103 84250-26 84980-04 84S-AC1-000 JD-0700EU-2 JM-0800-2 JW-T0100 89498-13 89758-05 89886-26 89941-00 G80-3000LSCEU-2 MJ0FGGRY JM-0800-0 84S-BB1-004 81601-26 UL21KMZQ G8011900LPMUS0 G84-4700LUCUS-0 81485-26 84105-13 V400-W24 5M V400-W23 5M G84-5200LCMEU-2 DT2257X20V00GRY 84Z2029-78 84Z2029-79 V400-W23P 5M VW3A8151R20U V400-W24 15M LT1332D V400-W24 10M V400-W24P 15M V400-W00 1M V400-W24P 10M V400-W23P 10M TCS-14920P V400-W23 3M LT1372D LP1007EXXH00R DT2253X20V00BLK 100133BX EZ08-230013 81248-04 89887-26 90215-00 HB110C3NWBNA