

PART NUMBER CODING


G C DFBN - M30

NUMBER OF POSITIONS PER ROW


PLATING

ALL PLATINGS HAVE .000050" NICKEL UNDERPLATE

	CONTACT	TERMINATION
B =	.000010" GOLD	.000100" PURE TIN, MATTE
C =	.000030" GOLD	.000100" PURE TIN, MATTE
E =	.000100" PURE TIN, MATTE OVERALL	

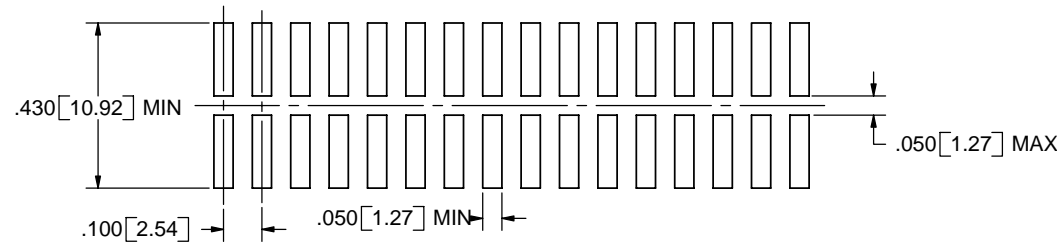

RECOMMENDED PCB LAYOUT

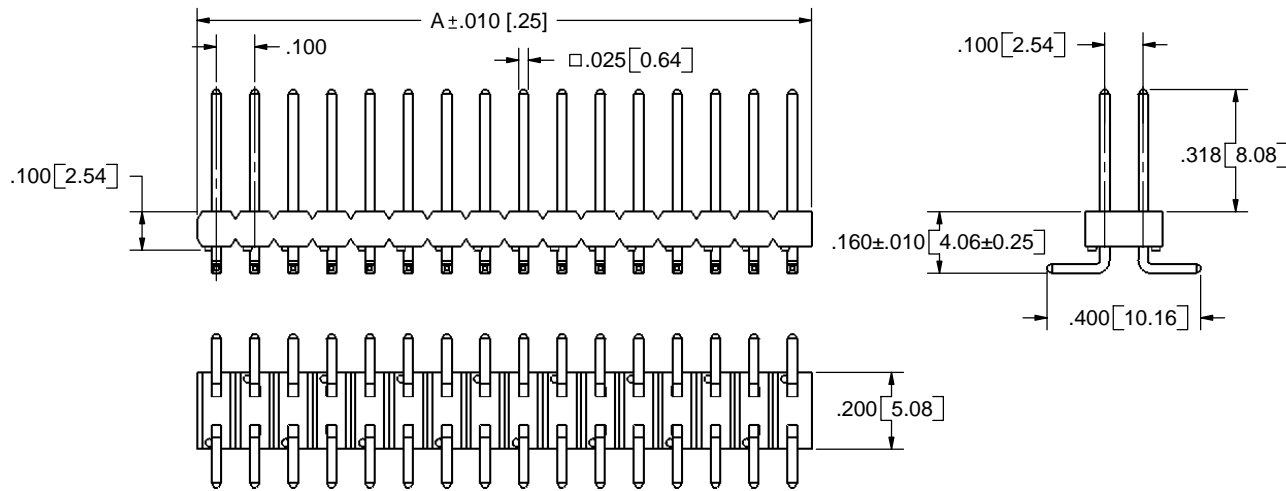

NOTES:

1. INSULATOR MATERIAL: PA9T.
2. CONTACT MATERIAL: PHOSPHOR BRONZE
3. PLATING: SEE TABLE
4. OPERATING TEMPERATURE: -65°C TO +125°C
5. PROCESSING TEMPERATURE: 260°C MAX FOR 120 SECS MAX.
6. UL FLAMMABILITY: 94V-0
7. VOLTAGE RATING: 600 VDC MINIMUM AT SEA LEVEL.
8. CURRENT RATING: 3 AMP
9. INSULATION RESISTANCE: 5000 MEGA OHMS.
10. MODIFICATION: SURFACE MOUNT.

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	536	INITIAL RELEASE	07-19-05	MNH

PART NUMBER	A
G_C01DFBN-M30	0.100 [2.54]
G_C02DFBN-M30	0.200 [5.08]
G_C03DFBN-M30	0.300 [7.62]
G_C04DFBN-M30	0.400 [10.16]
G_C05DFBN-M30	0.500 [12.70]
G_C06DFBN-M30	0.600 [15.24]
G_C07DFBN-M30	0.700 [17.78]
G_C08DFBN-M30	0.800 [20.32]
G_C09DFBN-M30	0.900 [22.86]
G_C10DFBN-M30	1.000 [25.40]
G_C11DFBN-M30	1.100 [27.94]
G_C12DFBN-M30	1.200 [30.48]
G_C13DFBN-M30	1.300 [33.02]
G_C14DFBN-M30	1.400 [35.56]
G_C15DFBN-M30	1.500 [38.10]
G_C16DFBN-M30	1.600 [40.64]
G_C17DFBN-M30	1.700 [43.18]
G_C18DFBN-M30	1.800 [45.72]
G_C19DFBN-M30	1.900 [48.26]
G_C20DFBN-M30	2.000 [50.80]
G_C21DFBN-M30	2.100 [53.34]
G_C22DFBN-M30	2.200 [55.88]
G_C23DFBN-M30	2.300 [58.42]
G_C24DFBN-M30	2.400 [60.96]
G_C25DFBN-M30	2.500 [63.50]
G_C26DFBN-M30	2.600 [66.04]
G_C27DFBN-M30	2.700 [68.58]
G_C28DFBN-M30	2.800 [71.12]
G_C29DFBN-M30	2.900 [73.66]
G_C30DFBN-M30	3.000 [76.20]
G_C31DFBN-M30	3.100 [78.74]
G_C32DFBN-M30	3.200 [81.28]
G_C33DFBN-M30	3.300 [83.82]
G_C34DFBN-M30	3.400 [86.36]
G_C35DFBN-M30	3.500 [88.90]
G_C36DFBN-M30	3.600 [91.44]

CUSTOMER COPY



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES[MM]		DATE	NAME
TOLERANCES: ANGULAR: ± 1° XX = ± .02 [.508] .XXX = ± .005 [.1270] XXXX = ± .0005 [.0127] PARENTHETICAL INFORMATION IS FOR REFERENCE ONLY		DRAWN	MNH
THE INFORMATION HEREIN CONTAINS PROPRIETARY RIGHTS OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY SULLINS ELECTRONICS.		DESCRIPTION SULLINS ELECTRONICS	
INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5-1984		HEADER CONNECTOR PART NUMBER G_C__DFBN-M30	
SIZE C	DWG. NO C10583	REV A	SCALE: 4:1
SHEET 1 OF 1		SHEET 1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sullins](#) manufacturer:

Other Similar products are found below :

[PEC36DGAN](#) [PPPC062LFBN-RC](#) [PBC36DADN](#) [PBC36DGAN](#) [GEC36SABN-M30](#) [PREC006DFBN-RC](#) [PZC04DBAN](#) [NPPN082AFCN-RC](#) [RBB60DHBS](#) [PPTC022LFBN-RC](#) [PPTC041LGBN-RC](#) [RCA44DRSD-S888](#) [EBC25DCWN](#) [LPPB031NFFN-RC](#) [GEC36DBAN](#) [EZM25DRXH](#) [NPTC042KFMS-RC](#) [TCC03DKSN-S1713](#) [ECC18DCCN](#) [NPPN081BFCN-RC](#) [FMC05DRTN-S1682](#) [EBC35DCWN](#) [SBH21-NBPN-D07-SM-BK](#) [WCT001-MCT](#) [NPPN041BFLC-RC](#) [PBC36DFAN](#) [SFH11-PBPC-D20-RA-BK](#) [NRTJ052TKEN-RC](#) [SPC02SVGN-RC](#) [PBC04DAAN](#) [PBC08DAGN](#) [MPP-1100-05-DS-4GR\(S1402\)](#) [PPTC042LFBN-RC](#) [PBC36DBCN](#) [PEC36SAGN](#) [PPPC142LJBN-RC](#) [PEC36DAHN](#) [PBC06DAAN](#) [PEC36DFCN](#) [PEC36DGBN](#) [PPTC162LFBN-RC](#) [PEC36DBEN](#) [PBC01DAAN](#) [PBC36SFEN](#) [SBH41-NBPB-D05-SM-BK](#) [PBC36SAGN](#) [PEC36SFEN](#) [PEC07DAAN](#) [GRPB121VWVN-RC](#) [AMC02SXNN-S328](#)