


ECN NO.	DATE
RELEASED	09/02/03
REVISED P/N	03/04/04
UPDATE TOL	12/16/04
	RELEASED REVISED P/N

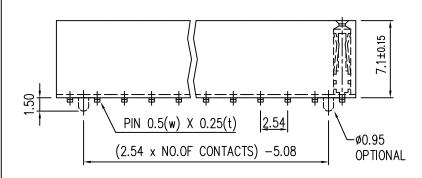

SPECIFICATIONS

CURRENT RATING: 3 AMPS

INSULATOR RESISTANCE: 5000 MEGOHMS MIN. CONTACT RESISTANCE: 20 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING: AC 500V

MAX PROCESSING TEMP : 230°C FOR 30 \sim 60 SECONDS

(260°C FOR 10 SECONDS)

OPERATING TEMPERATURE : -40° C $\sim +125^{\circ}$ C CONTACT MATERIAL : PHOSPHOR BRONZE. INSULATOR MATERIAL: NYLON 6T, UL 94V-0

*CONTACT PLATING: P=OVERALL GOLD FLASH; T=OVERALL TIN PLATED

ORDERING INFORMATION:

- 1. Replace "*" with plating code
- 2. Replace "xx" with number of positions (note that for this dual row connector, the number of positions is 1/2 the number of total contacts)
- 3. To add guide post feature, replace 1st letter "S" of the part number with "P"

SCALE	NTS	DRAW	JFW	Sullins Electronics San Morcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
UNIT	MM	CHECK	AJT		
TOLE	ERANCE	AP"E		NAME: FEMALE HEADER, 2.54mm SPACING	
.0=±0.35				7.1mm PROFILE, SMT	
.00=±0).2	PROJECTION		PART NO	PP_Cxx2KFMS
ANG=±5°				DRAW NO	7011

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for sullins manufacturer:

Other Similar products are found below:

PEC36DGAN PPPC062LFBN-RC PBC36DADN PBC36DGAN GEC36SABN-M30 PREC006DFBN-RC PZC04DBAN NPPN082AFCN-RC RBB60DHBS PPTC022LFBN-RC PPTC041LGBN-RC RCA44DRSD-S888 EBC25DCWN LPPB031NFFN-RC GEC36DBAN EZM25DRXH NPTC042KFMS-RC TCC03DKSN-S1713 ECC18DCCN NPPN081BFCN-RC FMC05DRTN-S1682 EBC35DCWN SBH21-NBPN-D07-SM-BK WCT001-MCT NPPN041BFLC-RC PBC36DFAN SFH11-PBPC-D20-RA-BK NRTJ052TKEN-RC SPC02SVGN-RC PBC04DAAN PBC08DAGN MPP-1100-05-DS-4GR(S1402) PPTC042LFBN-RC PBC36DBCN PEC36SAGN PPPC142LJBN-RC PEC36DAHN PBC06DAAN PEC36DFCN PEC36DGBN PPTC162LFBN-RC PEC36DBEN PBC01DAAN PBC36SFEN SBH41-NBPB-D05-SM-BK PBC36SAGN PEC36SFEN PEC07DAAN GRPB121VWVN-RC AMC02SXNN-S328