

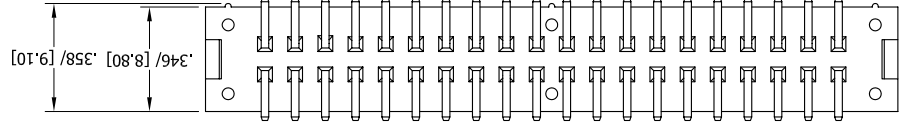
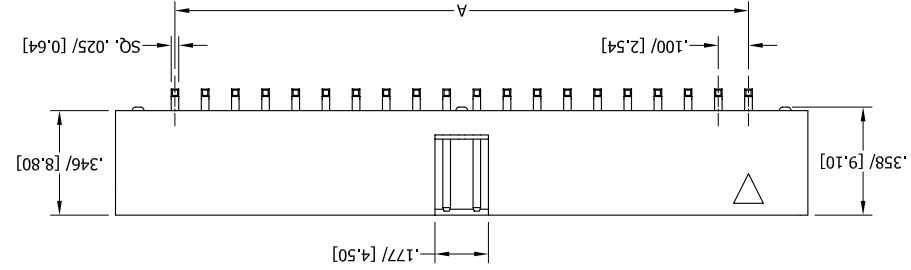
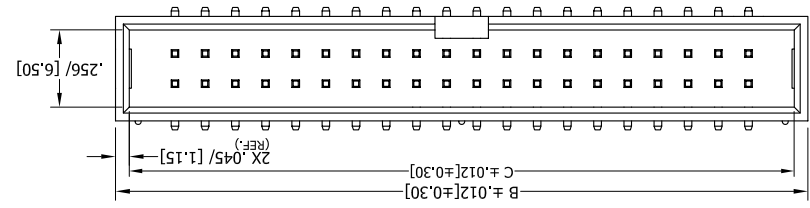


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	1682	INITIAL RELEASE	5/12/2008	VJ
B	1682	UPDATE DIM 'C', TABLE, NOTE 3 & TOLERANCE BLOCK	11/12/2008	JH

PART NUMBER CODING

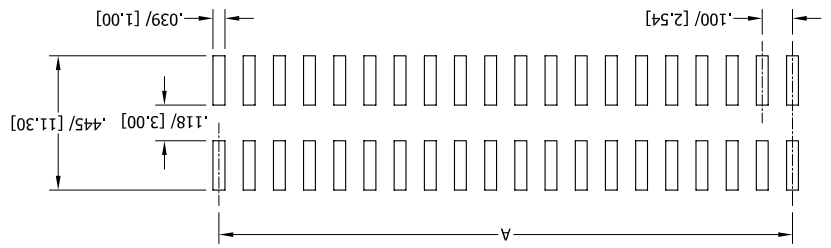

- NOTES:
- INSULATOR MATERIAL: NYLON 6T.
 - CONTACT MATERIAL: BRASS.
 - PLATING: GOLD FLASH OVERALL.
 - OPERATING TEMPERATURE: -40°C ~ 105°C.
 - PROCESSING TEMP: 230°C FOR 60 SECONDS MAX. (260°C, 10 SEC.)
 - UL FLAMMABILITY RATING: 94V-0.
 - VOLTAGE RATING: 20M OHMS MAX.
 - CURRENT RATING: 3 AMP PER CONTACT.
 - VOLTAGE DROP: AC 500 V.
 - INSULATION RESISTANCE: 1000 MEGA OHMS.

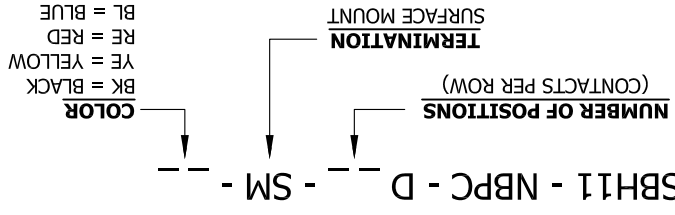

ROHS COMPLIANT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES[MM]
TOLERANCES:
ANGULAR: ±.1°
THE INFORMATION HEREIN CONTAINS
TRADE SECRETS AND IS NOT
TO BE REPRODUCED, USED OR
DISCLOSED IN ANY MANNER
WITHOUT THE WRITING OF AN
AUTHORIZED PERSONNEL.
REFERENCE ONLY
PARENT METRIC INFORMATION IS FOR
REFERENCE ONLY
XXX = ±.008 [0.20]
XX = ±.012 [0.30]
X = ±.004 [0.10]
TOLERANCING
PER: ANSI Y14.5-1984

PART NUMBER	CONTRACTS		POSITIONS/	
	INCH	MM	INCH	MM
SBH11-NBPC-D03-SM-	0.200	5.08	0.595	15.12
SBH11-NBPC-D04-SM-	0.300	7.62	0.695	17.66
SBH11-NBPC-D05-SM-	0.400	10.16	0.795	20.20
SBH11-NBPC-D06-SM-	0.500	12.70	0.895	22.74
SBH11-NBPC-D07-SM-	0.600	15.24	0.995	25.28
SBH11-NBPC-D08-SM-	0.700	17.78	1.095	27.82
SBH11-NBPC-D10-SM-	0.900	22.86	1.295	32.90
SBH11-NBPC-D12-SM-	1.100	27.94	1.495	37.98
SBH11-NBPC-D13-SM-	1.200	30.48	1.595	40.52
SBH11-NBPC-D15-SM-	1.400	35.56	1.795	45.60
SBH11-NBPC-D17-SM-	1.600	40.64	1.995	50.68
SBH11-NBPC-D20-SM-	1.900	48.26	2.295	58.30
SBH11-NBPC-D22-SM-	2.100	53.34	2.495	63.38
SBH11-NBPC-D25-SM-	2.400	60.96	2.795	71.00
SBH11-NBPC-D30-SM-	2.900	73.66	3.295	83.70
SBH11-NBPC-D32-SM-	3.100	78.74	3.495	88.78
	32/64	3.100	78.74	3.495
	30/60	2.900	73.66	3.295
	25/50	2.400	60.96	2.795
	22/44	2.100	53.34	2.495
	20/40	1.900	48.26	2.295
	17/34	1.600	40.64	1.995
	15/30	1.400	35.56	1.795
	13/26	1.200	30.48	1.595
	12/24	1.100	27.94	1.495
	10/20	0.900	22.86	1.295
	08/16	0.700	17.78	1.095
	07/14	0.600	15.24	0.995
	06/12	0.500	12.70	0.895
	05/10	0.400	10.16	0.795
	04/08	0.300	7.62	0.695
	03/06	0.200	5.08	0.595
			MM	INCH
			MM	INCH

SCALE: NONE	SHEET 1 OF 1
SIZE: C	DWG. NO.: 11093
REV: B	REV: B
PART NUMBER: SBH11-NBPC-D-SM-	DESCRIPTION: CONNECTOR SOLUTIONS
DATE: 5/12/2008	DRAWN: VJ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sullins](#) manufacturer:

Other Similar products are found below :

[PEC36DGAN](#) [PBC36DADN](#) [PBC36DGAN](#) [GEC36SABN-M30](#) [PREC006DFBN-RC](#) [PZC04DBAN](#) [NPPN082AFCN-RC](#) [RBB60DHBS](#)
[PPTC022LFBN-RC](#) [PPTC041LGBN-RC](#) [RCA44DRSD-S888](#) [EBC25DCWN](#) [LPPB031NFFN-RC](#) [GEC36DBAN](#) [EZM25DRXH](#) [SBH11-](#)
[NBPC-D08-SM-BK](#) [NPTC042KFMS-RC](#) [TCC03DKSN-S1713](#) [ECC18DCCN](#) [NPPN081BFCN-RC](#) [FMC05DRTN-S1682](#) [EBC35DCWN](#)
[SBH21-NBPN-D07-SM-BK](#) [WCT001-MCT](#) [NPPN041BFLC-RC](#) [PBC36DFAN](#) [SFH11-PBPC-D20-RA-BK](#) [NRTJ052TKEN-RC](#)
[SPC02SVGN-RC](#) [PBC04DAAN](#) [PBC08DAGN](#) [MPP-1100-05-DS-4GR\(S1402\)](#) [PPTC042LFBN-RC](#) [SWR201-NRTN-S05-SA-WH](#)
[PBC36DBCN](#) [PBC36SBCN](#) [PEC36SAGN](#) [PPPC142LJBN-RC](#) [PEC36DAHN](#) [PBC06DAAN](#) [PEC36DFCN](#) [GRPB121VWVN-RC](#)
[PEC36DGBN](#) [PPTC162LFBN-RC](#) [PEC36DBEN](#) [PBC01DAAN](#) [PBC36SFEN](#) [SBH41-NBPB-D05-SM-BK](#) [PEC36SFEN](#) [PEC07DAAN](#)