

SMD Power Inductor 0415CDMCB/DS



Halogen Free

Description

- Magnetically shielded.
- L × W × H: 4.75 × 4.35 × 1.5 mm Max.
- Product weight: 0.15g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 4500pcs per reel


Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, SSD and other low profile high current application.

Dimension - [mm]

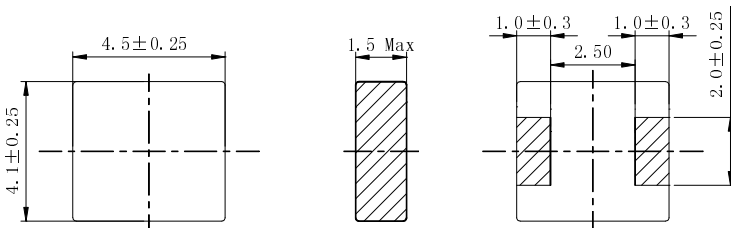

Land pattern and Schematics - [mm]

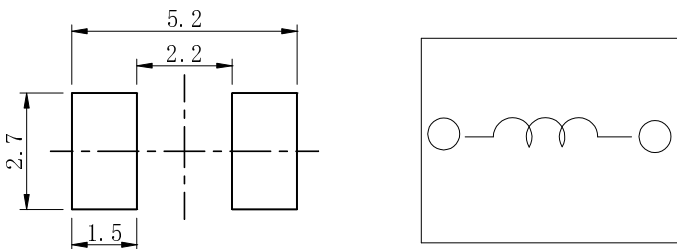

Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [within] ※1	D.C.R (m Ω) [within] at 25°C	Saturation Current [Typ.](A) ※2	Temperature rise current [Typ.](A) Thermocouple Method ※3
0415CDMCBDS-R33MC	R33	0.33 ± 20%	10 ± 20%	10.0	7.5
0415CDMCBDS-R47MC	R47	0.47 ± 20%	13 ± 20%	9.5	6.5
0415CDMCBDS-1R0MC	1R0	1.0 ± 20%	30 ± 20%	7.0	4.5
0415CDMCBDS-1R5MC	1R5	1.5 ± 20%	45 ± 20%	4.5	3.5
0415CDMCBDS-2R2MC	2R2	2.2 ± 20%	67 ± 20%	3.8	3.0
0415CDMCBDS-3R3MC	3R3	3.3 ± 20%	82 ± 20%	3.2	2.5
0415CDMCBDS-4R7MC	4R7	4.7 ± 20%	108 ± 20%	2.8	2.2
0415CDMCBDS-6R8MC	6R8	6.8 ± 20%	185 ± 20%	2.3	1.6
0415CDMCBDS-100MC	100	10.0 ± 20%	285 ± 20%	1.8	1.4

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of DC current when the inductance is over 80% of the initial value. (at 25°C)










※3. Temperature rise current: The actual value of DC current when the top surface temperature of test sample rise is $\Delta T = 40^\circ\text{C}$ ($T_a = 25^\circ\text{C}$).

SMD Power Inductor 0415CDMCB/DS



Saturation Current & Temperature Rise Graph



— L (20°C) — ΔT

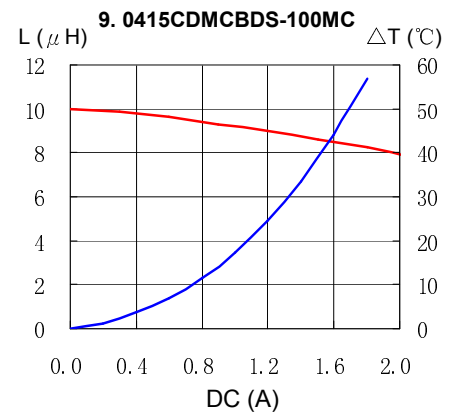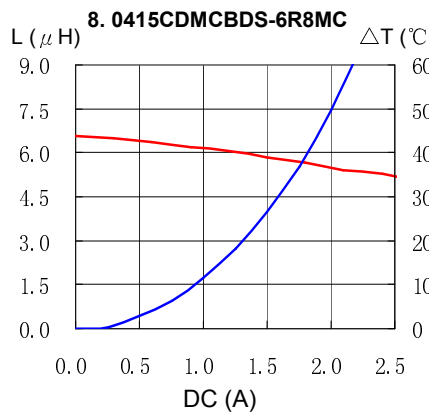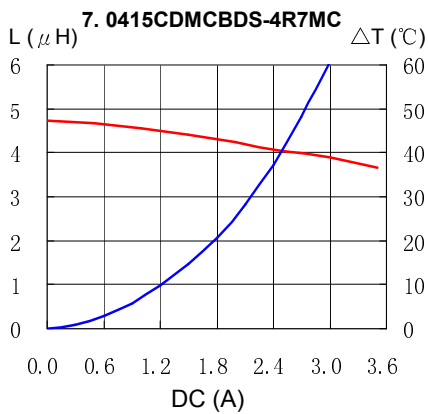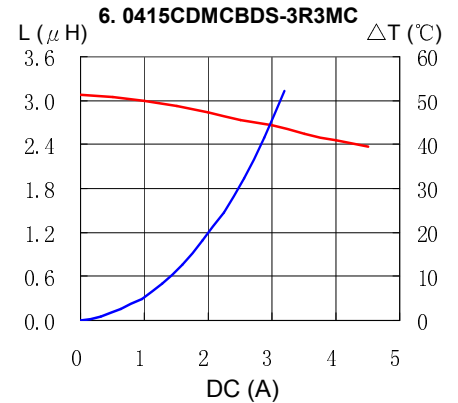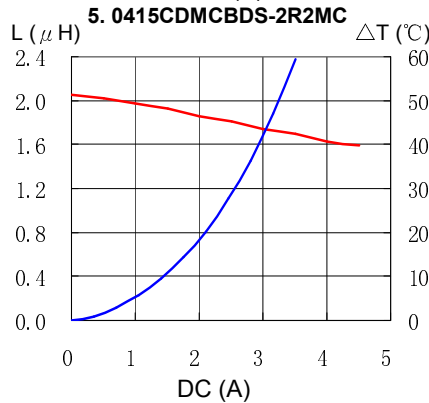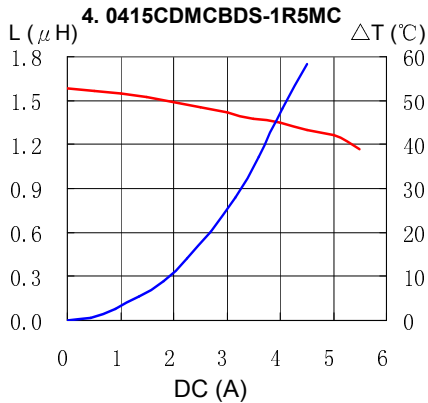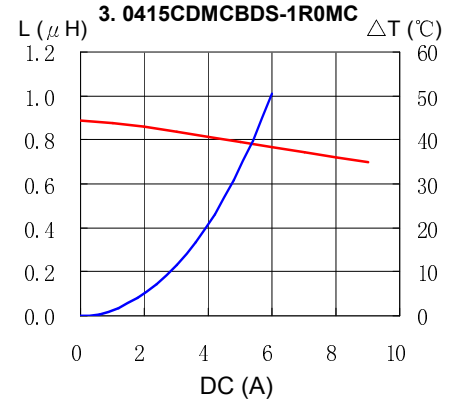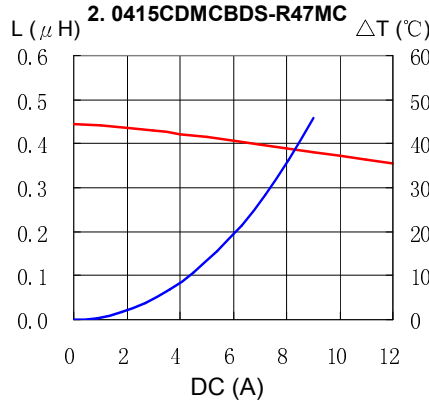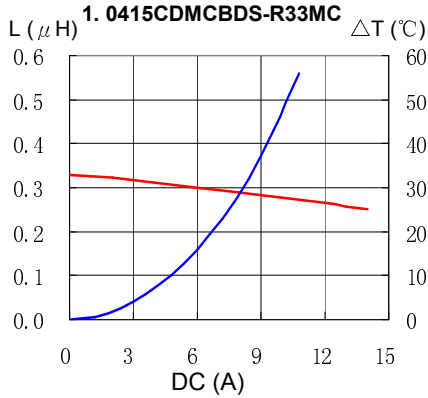

SMD Power Inductor 0415CDMCB/DS



Solder Reflow Condition

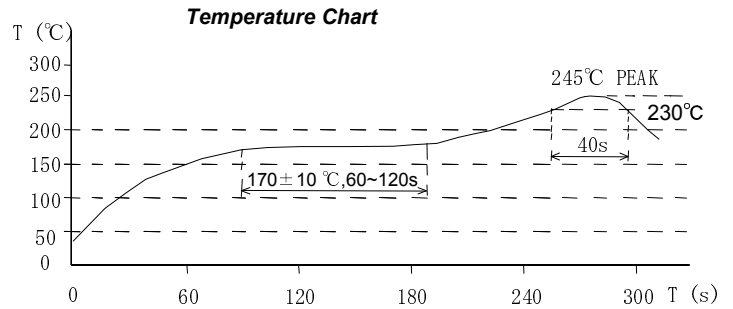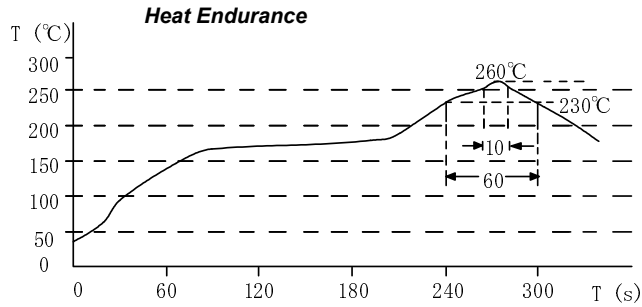

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sumida](#) manufacturer:

Other Similar products are found below :

[RCH108NP-100M](#) [RCH895NP-181K](#) [W3B2S-40/13-BLK-S](#) [CDRH127NP-680MC](#) [RCH895NP-471K](#) [CDRH6D38NP-7R4NC](#)
[CDRH104RT125NP-2R2PC](#) [R10-1-3/4-BLK-S](#) [ESMIT-4180/A](#) [CDRH8D43NP-330NC](#) [B2-1-BLK-S](#) [B2-3/64-BLK-S](#) [CDRH4D22HPNP-6R3NC](#) [RCR875DNP-100L](#) [RCH110NP-471K](#) [CDRH105RNP-150NC](#) [CMD4D13NP-680MC](#) [RCP1317NP-151L](#) [A2-1/4-CLR-S](#)
[RCR875DNP-222K](#) [H-ML-2](#) [A2-1/16-CLR-S](#) [CDEP85NP-R45MC-50](#) [CDRH103RNP-100NC-B](#) [CDRH5D28RNP-2R5NC](#) [CD30D22HF-2R2MC](#) [CDEP147NP-4R7MC-95](#) [RCH110NP-180M](#) [RCH110NP-331K](#) [CDRH3D28NP-3R3NC](#) [CDRH8D28HPNP-4R7NC](#) [CDRH4D18NP-100NC](#) [RCR875DNP-4R7L](#) [B2-1/16-BLK-S](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#)
[CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR54NP-181KC](#) [CR75NP-270KC](#) [CR75NP-820KC](#) [CDC5D23BNP-5R6MC](#) [CDEP127NP-120MC](#)