

SMD Power Inductor

0640CDMCC/DS



Recommended Type



Description

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current
- L×W×H: 7.4×6.8×4.0mm Max.
- Product weight: 1.0g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance and Halogen free available

Environmental Data

- Operating temperature range: -55°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -55°C~+125°C


Packaging

- Carrier tape and reel packaging.
- 1,000pcs per reel.

Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, Server application
- High current, POL converters
- Low profile, high current power supplies
- Battery powered devices
- DC/DC converter in distributed power systems

Dimension - [mm]

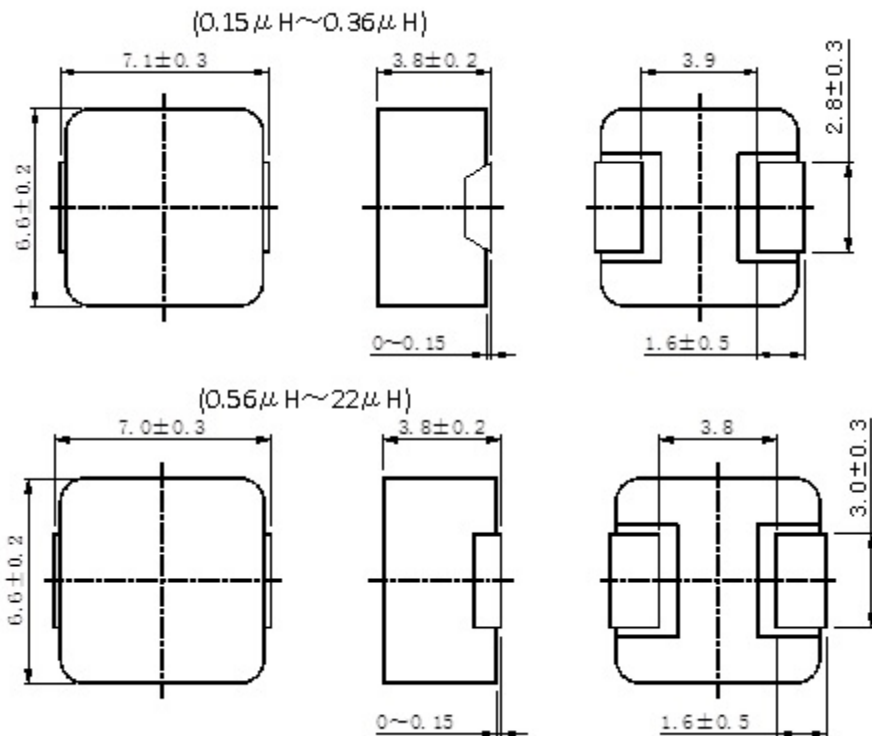

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor

0640CDMCC/DS




Recommended Type

Recommended Land pattern - [mm]



Wire Connection



SMD Power Inductor

0640CDMCC/DS



Electrical Characteristics



Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2	Temperature Rise Current (A) Max.(Typ.) ※3
0640CDMCCDS-R15MC	0.15 \pm 20%	0.73 (0.66)	42.50 (50.00)	(45.00)
0640CDMCCDS-R24MC	0.24 \pm 20%	1.15 (1.00)	25.00 (28.50)	(38.00)
0640CDMCCDS-R36MC	0.36 \pm 20%	1.70 (1.50)	22.50 (26.50)	(27.00)
0640CDMCCDS-R56MC	0.56 \pm 20%	3.90 (3.30)	20.00 (24.00)	(20.00)
0640CDMCCDS-1R0MC	1.00 \pm 20%	6.80 (5.50)	13.50 (16.00)	(15.00)
0640CDMCCDS-1R5MC	1.50 \pm 20%	8.20 (6.80)	9.70 (11.50)	(14.00)
0640CDMCCDS-2R2MC	2.20 \pm 20%	10.80 (8.60)	9.40 (11.00)	(12.00)
0640CDMCCDS-3R3MC	3.30 \pm 20%	21.50 (18.00)	8.50 (10.00)	(8.00)
0640CDMCCDS-4R7MC	4.70 \pm 20%	35.00 (29.00)	8.00 (9.50)	(5.70)
0640CDMCCDS-6R8MC	6.80 \pm 20%	45.50 (37.50)	6.00 (7.00)	(5.00)
0640CDMCCDS-100MC	10.00 \pm 20%	68.50 (57.00)	5.20 (6.20)	(4.20)
0640CDMCCDS-150MC	15.00 \pm 20%	89.00 (74.50)	3.90 (4.60)	(3.80)
0640CDMCCDS-220MC	22.00 \pm 20%	133 (110)	3.20 (3.80)	(3.30)

※1 Measuring frequency Inductance at 100kHz 1V.

※2 Saturation current: This indicates the value of D.C. current when the inductance becomes 30% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). (Test board condition: FR4, Copper= $70\mu\text{m}$, four-layer PWB $t=1.6\text{mm}$)

Solder Reflow Condition

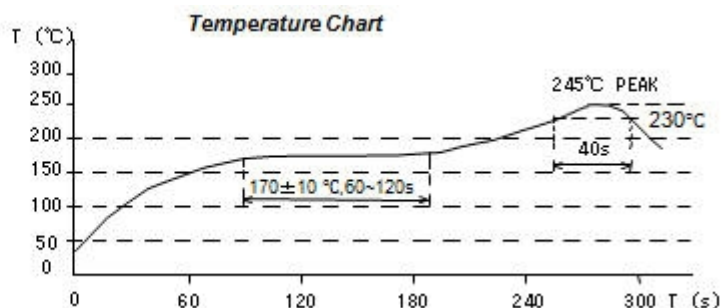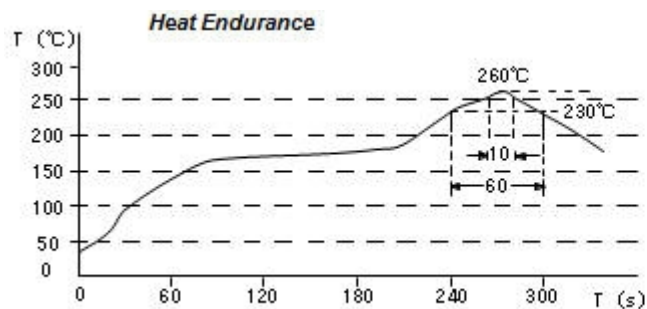

SMD Power Inductor


0640CDMCC/DS




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. 0640CDMCCDS-R15MC

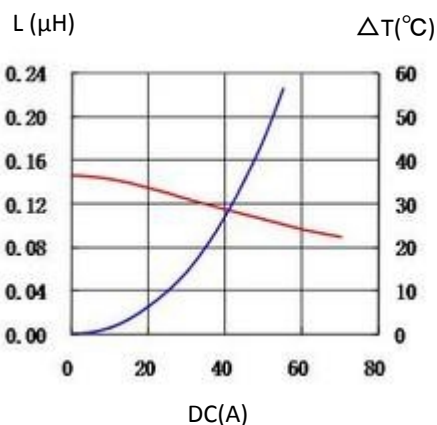


2. 0640CDMCCDS-R24MC

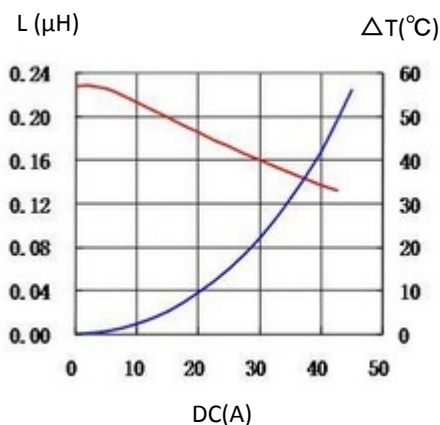


3. 0640CDMCCDS-R36MC

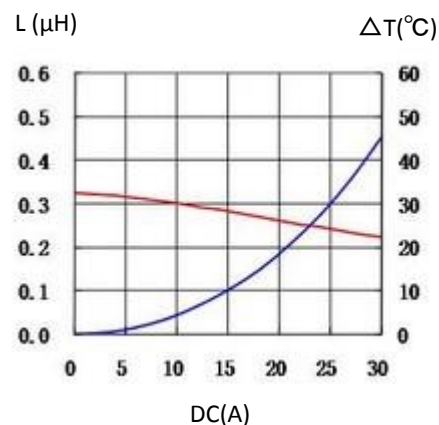


4. 0640CDMCCDS-R56MC

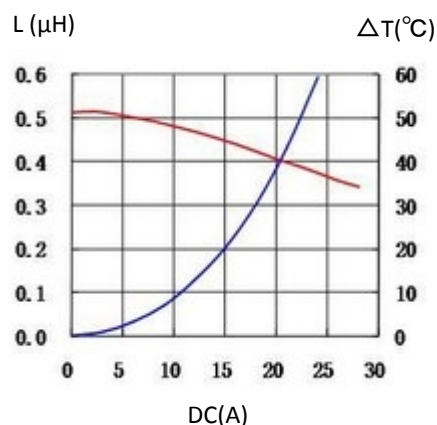


5. 0640CDMCCDS-1R0MC

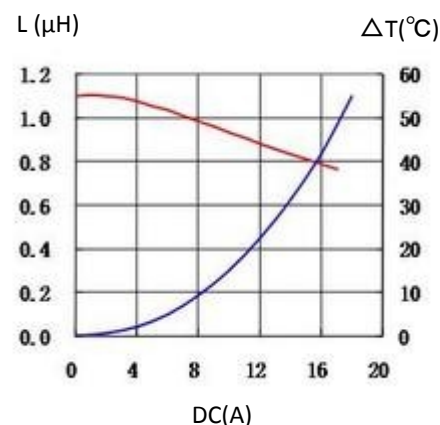


6. 0640CDMCCDS-1R5MC

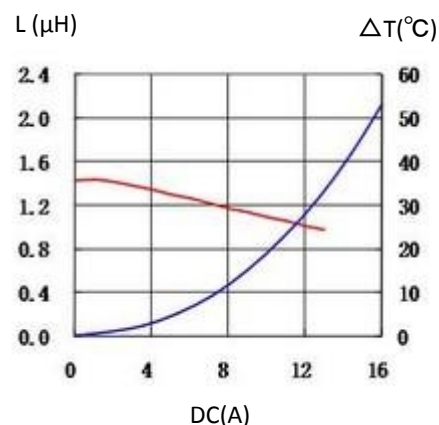


7. 0640CDMCCDS-2R2MC

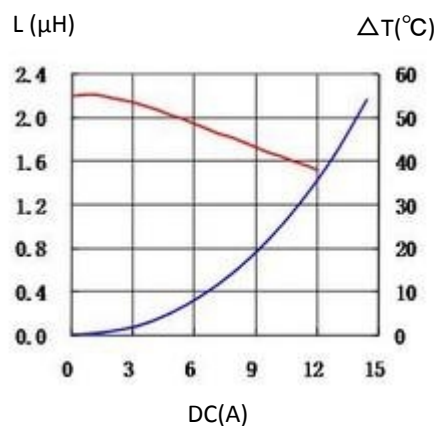

8. 0640CDMCCDS-3R3MC

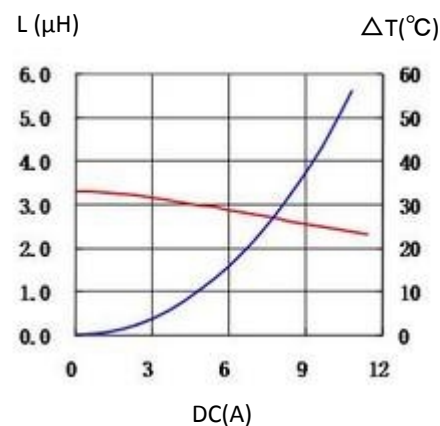

9. 0640CDMCCDS-4R7MC

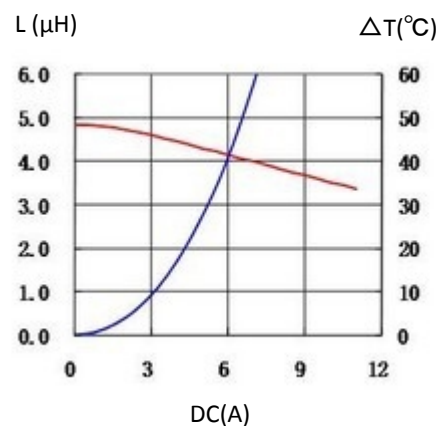


SMD Power Inductor

0640CDMCC/DS




Recommended Type


10. 0640CDMCCDS-6R8MC

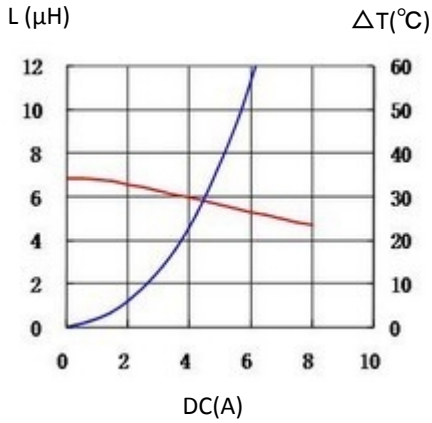


11. 0640CDMCCDS-100MC

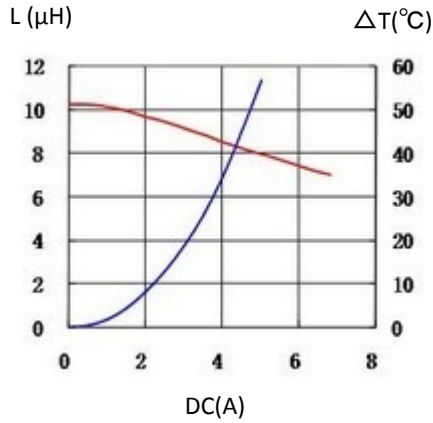

12. 0640CDMCCDS-150MC

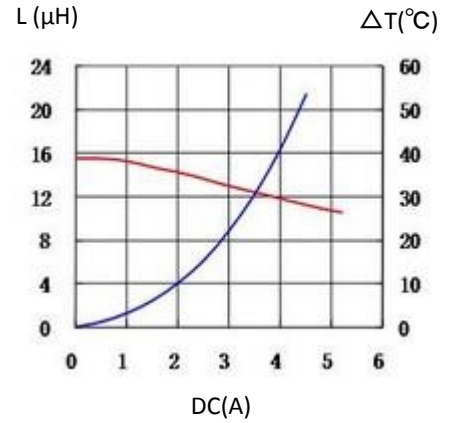

13. 0640CDMCCDS-220MC

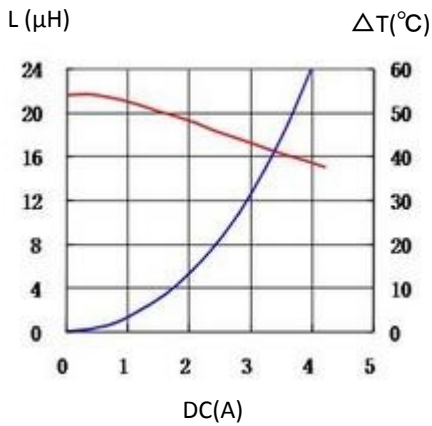

For sales office information, please [click here](#) to visit our website.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)