

SMD Power Inductor

252012CDMCC/DS



Recommended Type

Description

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current.
- LxWxH:2.7x2.2x1.2mm Max.
- Product weight: 0.36mg (Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -55°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -55°C~+125°C


Packaging

- Carrier tape and reel packaging. 3,000pcs per reel.


Applications

- DC/DC converter for CPU in Notebook PC. Smartphones, LCD displays, HDDs, DVDs, DVCs,DSCs,PDA's ect..
- Thin type on-board power supply module for exchanger VRM for server.
- Low profile, high current power supplies. Battery powered devices.


Dimension - [mm]

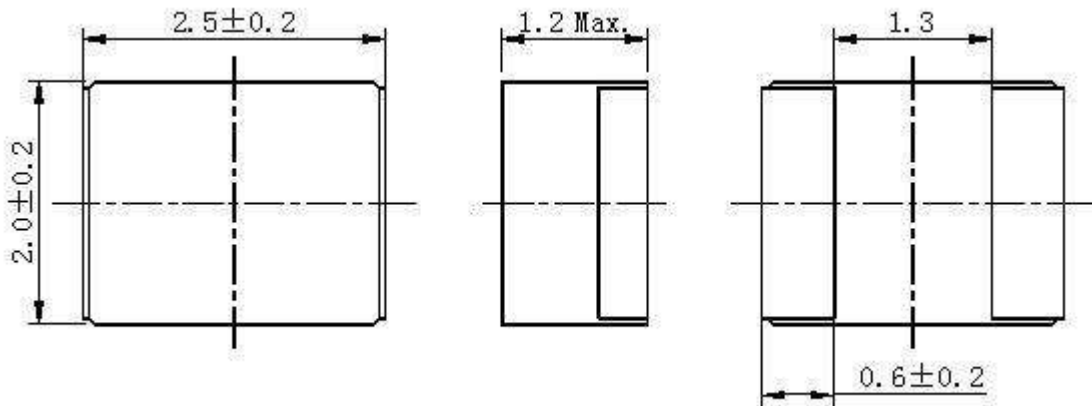

Recommended Land pattern - [mm]



Wire Connection

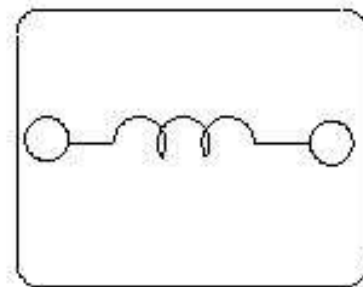

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

252012CDMCC/DS



Recommended Type

Electrical Characteristics

Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C max(typ) (m Ω)	Saturation Current at 20°C(A) ※2	Temperature Rise Current (A) ※3
252012CDMCCDS-R47MC	0.47 \pm 20%	25.00 (21.00)	6.10	4.80
252012CDMCCDS-1R0MC	1.00 \pm 20%	55.00 (46.00)	3.90	3.20
252012CDMCCDS-2R2MC	2.20 \pm 20%	113 (94.00)	2.80	2.00
252012CDMCCDS-3R3MC	3.30 \pm 20%	222 (185)	1.90	1.50
252012CDMCCDS-4R7MC	4.70 \pm 20%	264 (220)	1.70	1.40



※ 1. Measuring frequency Inductance at 1MHz, 0. 1V.

※ 2. Saturation current: The actual value of D.C current when the inductance decreases to 70% of it's initial value.

※ 3. Temperature rise current: The actual value of DC current when the coil temperature rise is $\Delta T=40^{\circ}\text{C}$

($T_a=25^{\circ}\text{C}$) Board conditions: FR4, Copper=70 μ m, four-layer PWB, $t=1.6\text{mm}$.

Solder Reflow Condition

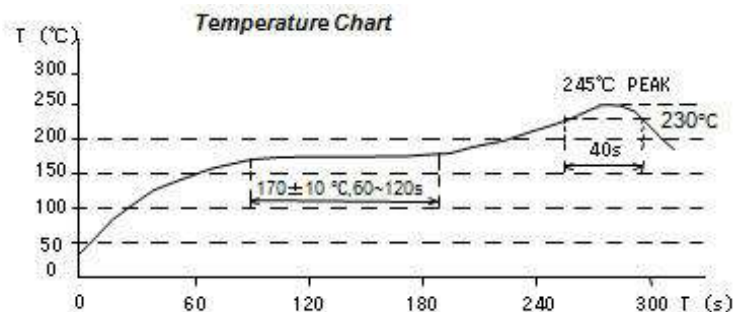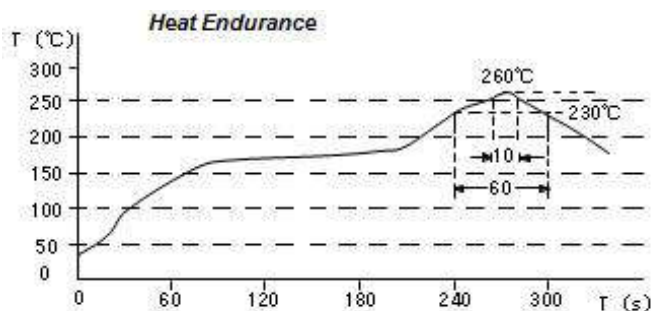

SMD Power Inductor

252012CDMCC/DS




Recommended Type


Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. 252012CDMCCDS-R47MC

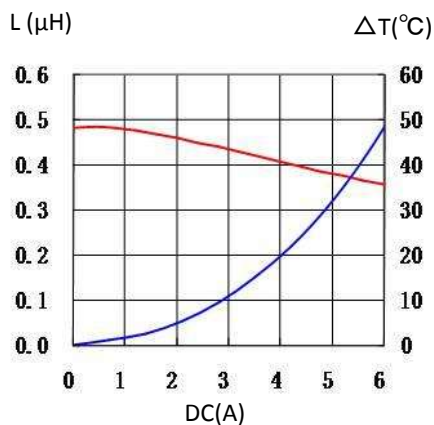


2. 252012CDMCCDS-1R0MC

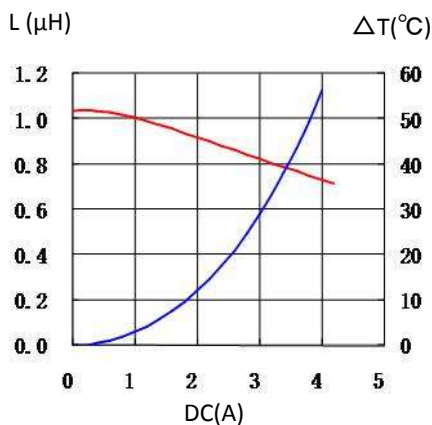


3. 252012CDMCCDS-2R2MC

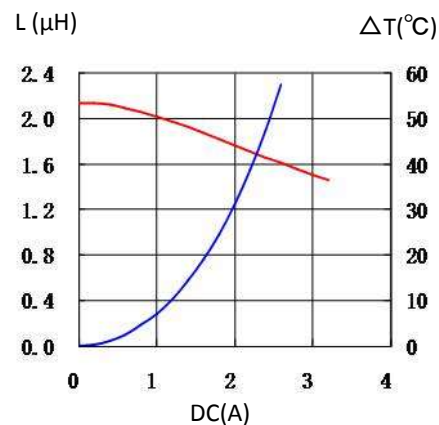

4. 252012CDMCCDS-3R3MC

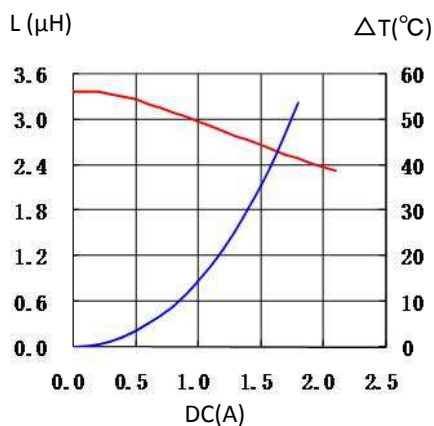

5. 252012CDMCCDS-4R7MC

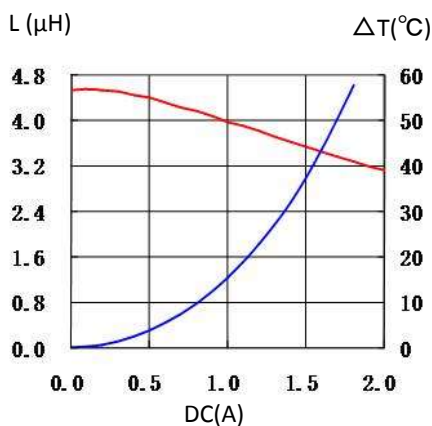

For sales office information, please [click here](#) to visit our website.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sumida](#) manufacturer:

Other Similar products are found below :

[RCH108NP-100M](#) [CDRH2D18LDNP-100NC](#) [RCH895NP-181K](#) [CDRH103RNP-4R7NC-B](#) [W3B2S-40/13-BLK-S](#) [PFC2225BNP-801](#)
[CDRH127NP-680MC](#) [RCH895NP-471K](#) [CDRH6D38NP-7R4NC](#) [CDRH104RT125NP-2R2PC](#) [R10-1-3/4-BLK-S](#) [ESMIT-4180/A](#)
[CDRH8D43NP-330NC](#) [CDRH6D38NP-5R0NC](#) [B2-1-BLK-S](#) [B2-3/64-BLK-S](#) [CDRH4D22HPNP-6R3NC](#) [RCR875DNP-100L](#)
[CDRH127/LDNP-220MC](#) [RCH110NP-331K](#) [RCH110NP-471K](#) [CDRH105RNP-150NC](#) [CDRH127LDNP-151MC](#) [CMD4D13NP-680MC](#)
[RCP1317NP-151L](#) [A2-1/4-CLR-S](#) [RCR875DNP-222K](#) [H-ML-2](#) [A2-1/16-CLR-S](#) [CDEP85NP-R45MC-50](#) [CDRH103RNP-100NC-B](#)
[RCH895NP-5R5M](#) [CDRH5D28RNP-2R5NC](#) [CD30D22HF-2R2MC](#) [CDEP147NP-4R7MC-95](#) [RCH110NP-180M](#) [CDRH3D28NP-3R3NC](#)
[CDRH8D28HPNP-4R7NC](#) [CDRH4D18NP-100NC](#) [B2-1/16-BLK-S](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#)
[CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#)