


LF Receiver Antenna

CAS16D15



Descriptions


- Compact LF receiver antenna (3D)
- Covered by over-molding.
- High Sensitivity and Reliability.
- LxWxH: 17.0 x3.5 x 1.65 mm Max.
- Operating temperature range: -40°C~+85°C
- Storage temperature range: -40°C~+85°C
- RoHS compliance.
- Carrier Tape and Reel.
- Tape specification according to EIA481.




Applications

- PEPS, Smart key system.
- Security system

Dimension - [mm]

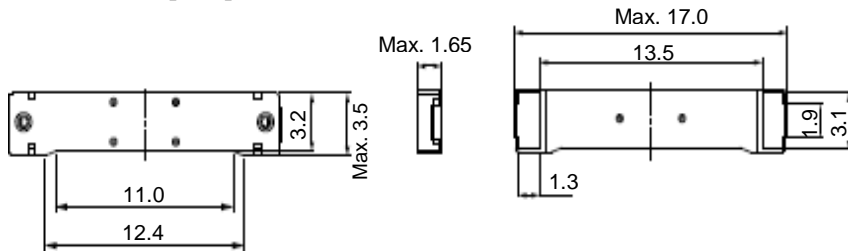

Land Patterns - [mm]

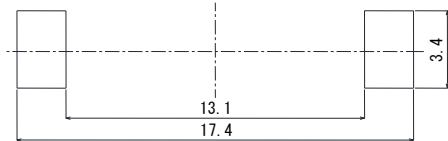

Electrical Characteristics

Part number	Inductance(mH) within (1-2)	Unloaded Q	S.R.F. (kHz) Min.	D.C.R. (Ω)Typ.
CAS16D15-672	6.75±3%	27.0	600	98.0
CAS16D15-602	6.0±3%	27.0	600	92.0
CAS16D15-232	2.36±3%	27.0	1,100	34.0

* Measuring conditions: Inductance and Q at 125kHz, 1V.



For sales office information, please [click here](#) to visit our website.

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [EXE902SM](#) [APAMPG-117](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#)
[SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#) [Y4503](#) [GD53-25](#) [C37](#)
[MAF94051](#) [S9025PLSMF](#) [QWFTB120](#) [MAF94300](#) [FG4403](#) [MIKROE-2393](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#)
[EXW30BNX](#) [RAD-ISM-2459-ANT-FOOD-6-0-](#) [S4908WBFNM](#) [B4305CN](#) [108-20131-010](#) [108-00032-010](#) [C27S](#) [CBNC58](#) [EXH160MXI](#)
[EXH160SFK](#) [MD10-004](#) [EXC902SM](#) [CB27](#) [ABFT](#) [BB4502NR](#) [B4502N](#) [S4908WBFNF](#) [NMOCAPB](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#)