



SMD Power Inductor CDC5D23B




Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 6.0 × 6.0 × 2.5 mm Max.
- Product weight: 215mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Dimension - [mm]

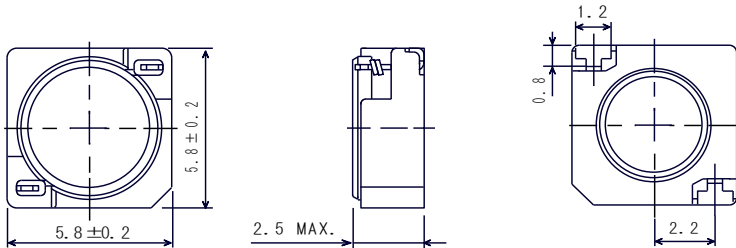

Schematics - [mm]



Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 2000pcs per reel

Applications

- Ideally used in EL drive as EL lamp inverter inductors.



Electrical Characteristics

Part Name	Stamp	Inductance (μH) [Within] ※1	D.C.R.(m Ω) Max. (Typ.) (at20 $^{\circ}\text{C}$)	Rated current (A) ※2
CDC5D23BNP-2R2MC	2R2	2.2 $\mu\text{H} \pm 20\%$	39 (30)	2.16
CDC5D23BNP-2R7MC	2R7	2.7 $\mu\text{H} \pm 20\%$	44 (34)	2.08
CDC5D23BNP-3R3MC	3R3	3.3 $\mu\text{H} \pm 20\%$	49 (38)	1.90
CDC5D23BNP-3R9MC	3R9	3.9 $\mu\text{H} \pm 20\%$	56 (43)	1.84
CDC5D23BNP-4R7MC	4R7	4.7 $\mu\text{H} \pm 20\%$	62 (48)	1.60
CDC5D23BNP-5R6MC	5R6	5.6 $\mu\text{H} \pm 20\%$	78 (60)	1.44
CDC5D23BNP-6R8MC	6R8	6.8 $\mu\text{H} \pm 20\%$	91 (70)	1.36
CDC5D23BNP-8R2MC	8R2	8.2 $\mu\text{H} \pm 20\%$	103(87)	1.12
CDC5D23BNP-100LC	100	10 $\mu\text{H} \pm 15\%$	133(102)	1.04
CDC5D23BNP-120LC	120	12 $\mu\text{H} \pm 15\%$	148(114)	0.96
CDC5D23BNP-150KC	150	15 $\mu\text{H} \pm 10\%$	166(128)	0.88
CDC5D23BNP-180KC	180	18 $\mu\text{H} \pm 10\%$	213(164)	0.77
CDC5D23BNP-220KC	220	22 $\mu\text{H} \pm 10\%$	248(191)	0.73
CDC5D23BNP-270KC	270	27 $\mu\text{H} \pm 10\%$	328(252)	0.64
CDC5D23BNP-330KC	330	33 $\mu\text{H} \pm 10\%$	378(291)	0.58
CDC5D23BNP-390KC	390	39 $\mu\text{H} \pm 10\%$	438(337)	0.54
CDC5D23BNP-470KC	470	47 $\mu\text{H} \pm 10\%$	546(420)	0.49
CDC5D23BNP-560KC	560	56 $\mu\text{H} \pm 10\%$	621(478)	0.45
CDC5D23BNP-680KC	680	68 $\mu\text{H} \pm 10\%$	715(550)	0.41
CDC5D23BNP-820KC	820	82 $\mu\text{H} \pm 10\%$	1000(772)	0.35
CDC5D23BNP-101KC	101	100 $\mu\text{H} \pm 10\%$	1070(820)	0.33
CDC5D23BNP-121KC	121	120 $\mu\text{H} \pm 10\%$	1250(960)	0.32
CDC5D23BNP-151KC	151	150 $\mu\text{H} \pm 10\%$	1660(1280)	0.26
CDC5D23BNP-181KC	181	180 $\mu\text{H} \pm 10\%$	1900(1460)	0.23
CDC5D23BNP-221KC	221	220 $\mu\text{H} \pm 10\%$	2440(1880)	0.21
CDC5D23BNP-271KC	271	270 $\mu\text{H} \pm 10\%$	2730(2100)	0.19

※1. Inductance measuring condition: at 100 kHz.













※2. Rated current: The DC current at which the inductance decreases to 90 % of it's initial value or when $\Delta t = 40^{\circ}\text{C}$, whichever is lower ($T_a = 20^{\circ}\text{C}$)

SMD Power Inductor CDC5D23B



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

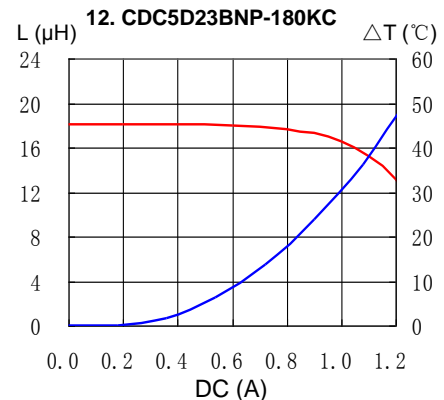
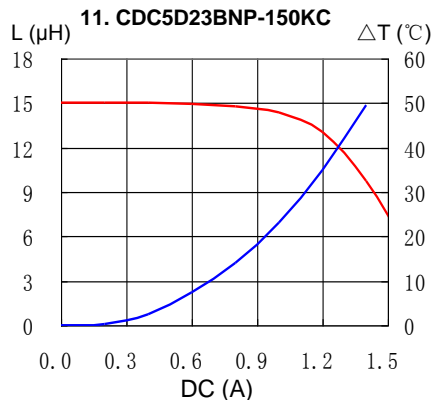
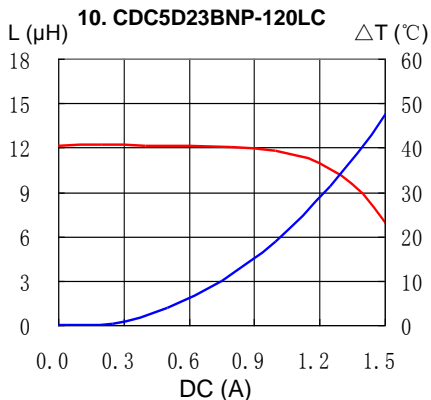
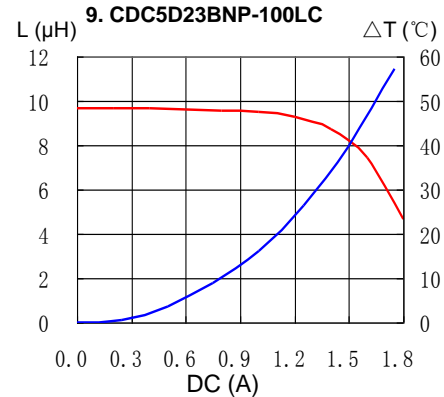
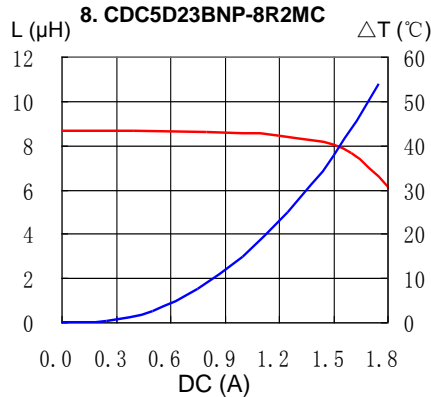
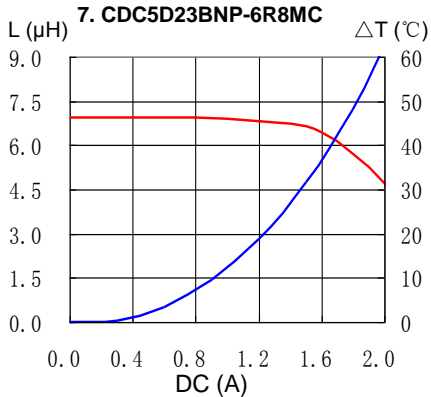
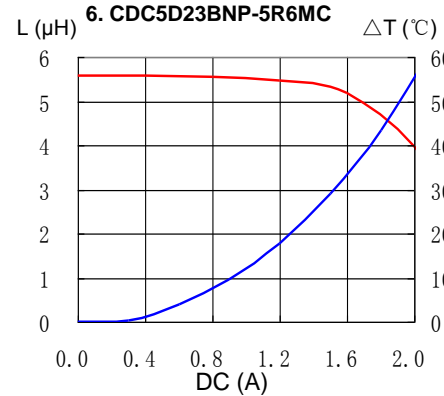
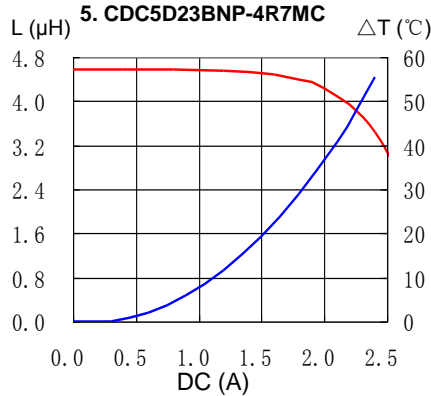
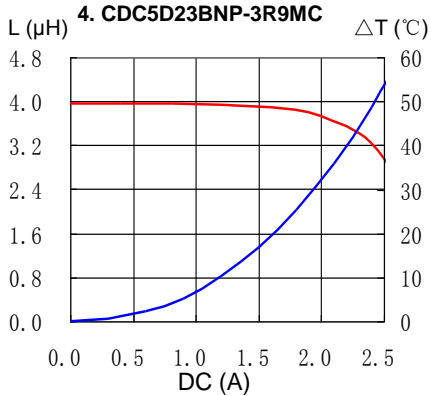
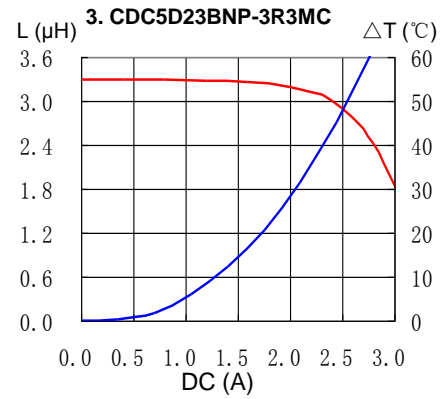
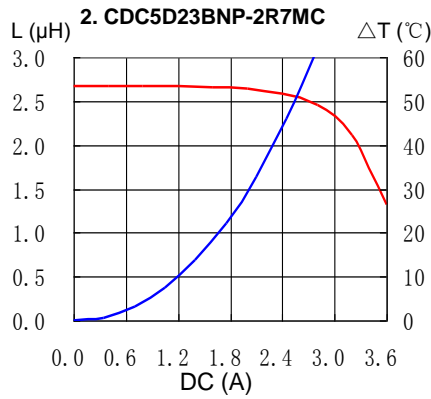
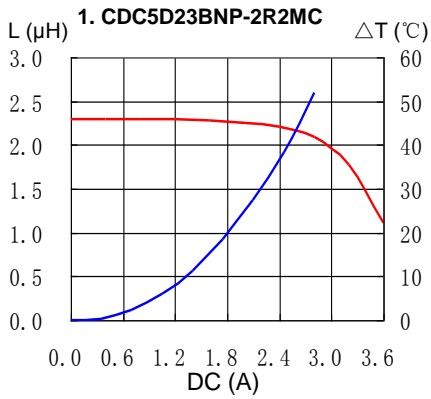


SMD Power Inductor CDC5D23B




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

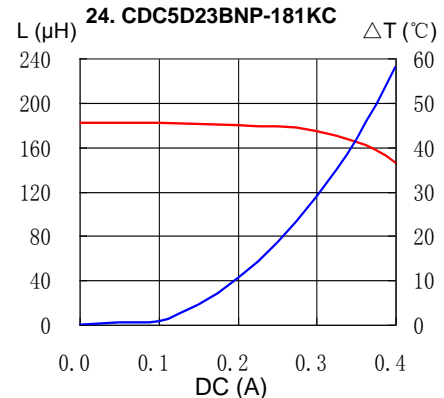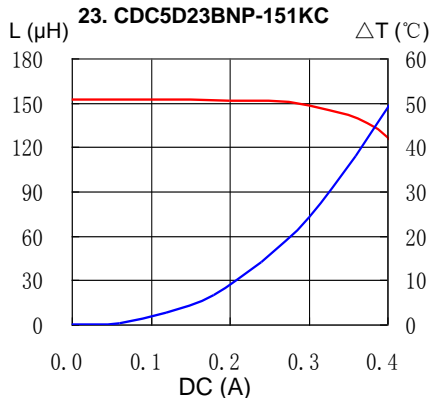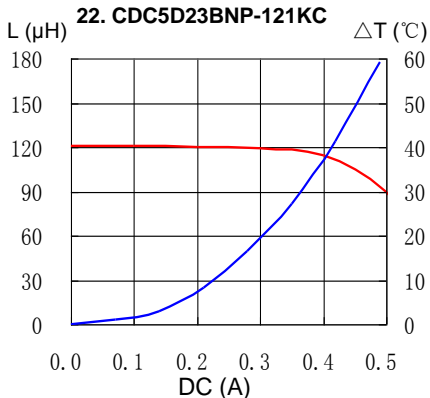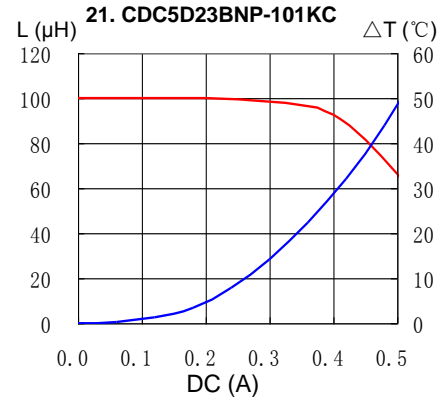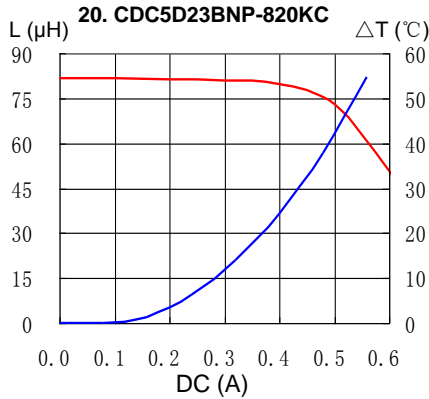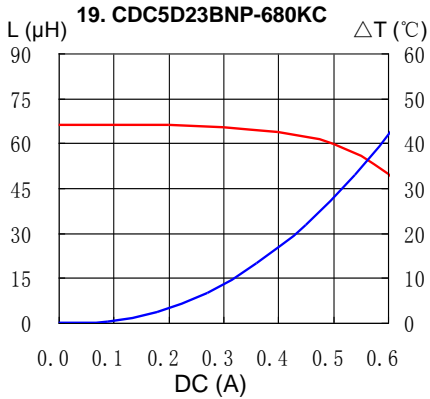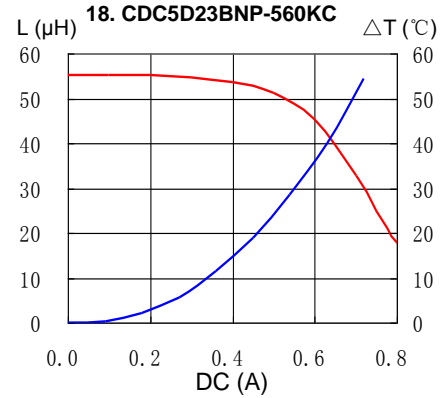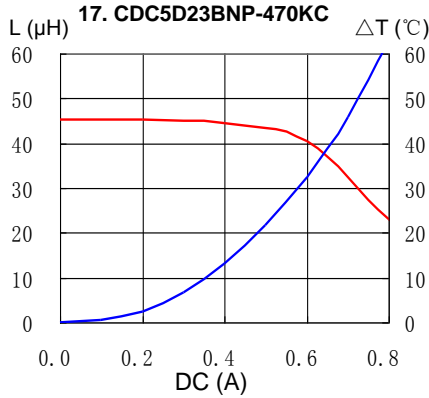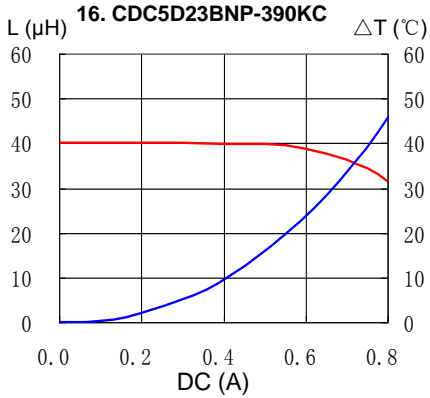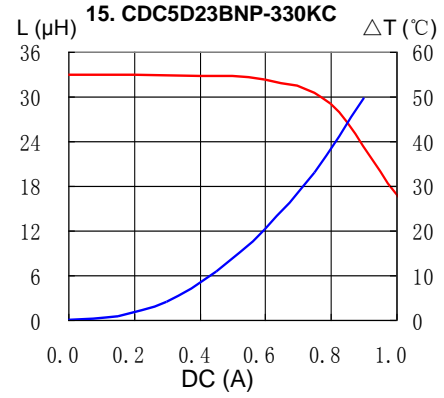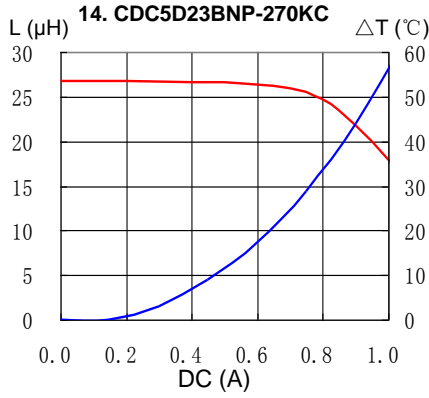
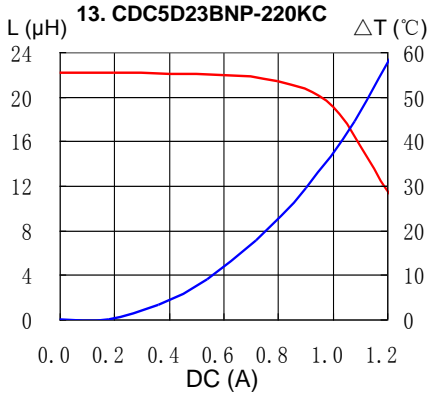


SMD Power Inductor CDC5D23B

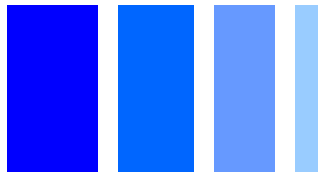


Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

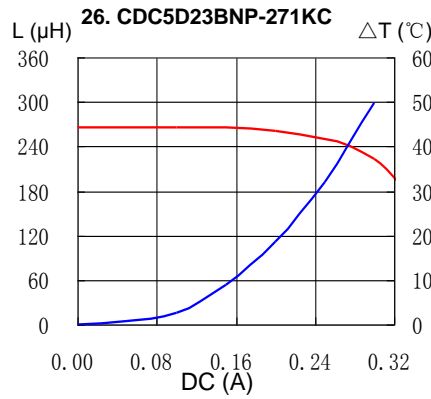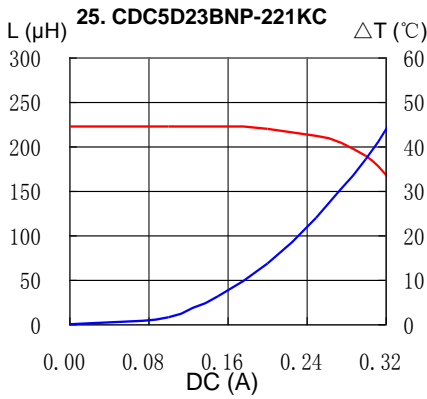


Solder Reflow Condition

Heat Endurance

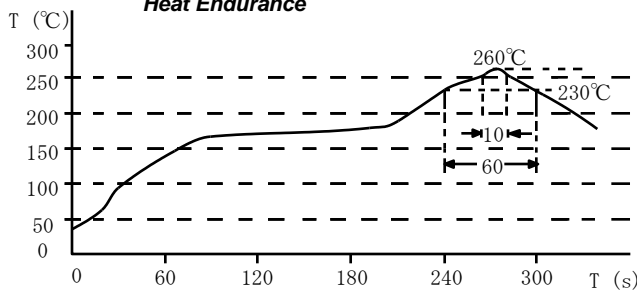

Temperature Chart

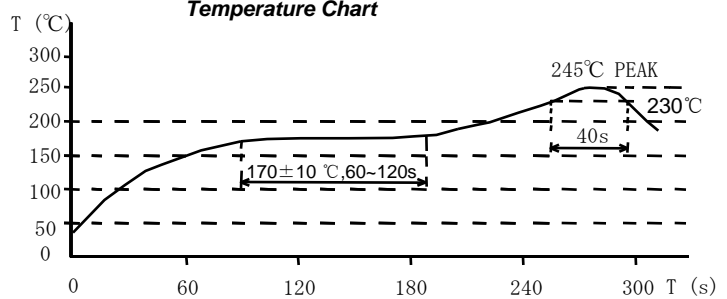

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)