


# Low-Profile High Current Power Inductor CDEP15D90/T150



## Description


- Inductor for high withstand voltage (DC 120V) and large current
- Magnetically shielded
- Qualified AEC-Q200
- Operating temperature range: - 40°C~+150°C  
(including coil's self temperature rise)




## Applications

- LED Head light for Automobile
- ECU
- Automotive and other high temperature, high reliability application

## Dimension - [mm]

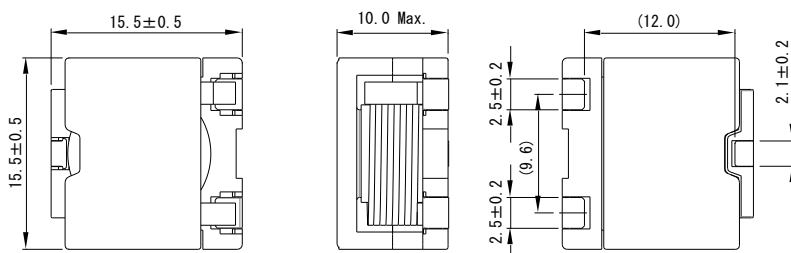

## Reference Land pattern - [mm]



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# Low-Profile High Current Power Inductor CDEP15D90/T150



## Electrical Characteristics: Standard Types

Part No.	Inductance ( $\mu\text{H}$ ) ( $\pm 20\%$ ) ※1	D.C.R (m $\Omega$ ) ( $\pm 20\%$ )	Saturation Current (A) ※2		Temperature Rise current (A) ※3
			at 20°C	at 150°C	
CDEP15D90T150NP-0R5MC-125	0.50	1.20	63.0	43.0	33.5
CDEP15D90T150NP-1R2MC-125	1.20	1.75	41.9	28.5	24.5
CDEP15D90T150NP-2R0MC-125	2.00	2.40	31.0	22.0	23.0
CDEP15D90T150NP-3R3MC-125	3.30	2.90	25.0	17.0	18.5
CDEP15D90T150NP-4R7MC-125	4.70	3.50	21.3	14.8	16.5
CDEP15D90T150NP-6R2MC-125	6.20	4.90	18.5	13.0	14.8
CDEP15D90T150NP-100MC-125	10.0	7.90	15.0	10.5	12.5
CDEP15D90T150NP-120MC-125	12.5	8.90	12.8	9.50	12.2
CDEP15D90T150NP-150MC-125	15.0	10.6	12.0	8.20	8.50
CDEP15D90T150NP-220MC-125	22.0	14.5	9.70	6.60	7.50

## Electrical Characteristics: High Power Types

Part No.	Inductance ( $\mu\text{H}$ ) ( $\pm 20\%$ ) ※1	D.C.R (m $\Omega$ ) ( $\pm 20\%$ )	Saturation Current (A) ※2		Temperature Rise current (A) ※3
			at 20°C	at 150°C	
CDEP15D90T150NP-1R0MC-100	1.00	1.75	51.6	35.8	24.5
CDEP15D90T150NP-1R6MC-100	1.60	2.40	42.0	28.0	23.0
CDEP15D90T150NP-2R4MC-100	2.40	2.90	34.5	24.5	18.5
CDEP15D90T150NP-3R6MC-100	3.60	3.50	26.5	18.5	16.5
CDEP15D90T150NP-4R7MC-100	4.70	4.90	24.0	16.7	14.8
CDEP15D90T150NP-6R8MC-100	6.80	5.50	20.3	13.8	13.5
CDEP15D90T150NP-100MC-100	10.0	8.90	16.2	11.3	12.2
CDEP15D90T150NP-120MC-100	12.5	10.6	15.0	10.2	8.50
CDEP15D90T150NP-150MC-100	15.0	13.4	13.4	9.70	8.00
CDEP15D90T150NP-220MC-100	22.0	20.1	11.0	7.50	6.50

※ 1 Measuring frequency at 100kHz 0.1V

※ 2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 30% lower than its nominal value.

※ 3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes  $\Delta T=40^\circ\text{C}$  ( $T_a=20^\circ\text{C}$ ).

Please note that when using the product while applying current with audio-frequency (AF) signals may results in audible noises due to magnetostriction. Also, in order to avoid an audible noise problem, operating with non-AF signals would be recommended. The noise amplify depending on the coil mount area on the PCB.


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# Low-Profile High Current Power Inductor CDEP15D90/T150




Saturation Current & Temperature Rise Graph — L (20°C) — L (150°C) —  $\Delta T$   
<Standard Types>


**CDEP15D90T150NP-0R5MC-125**

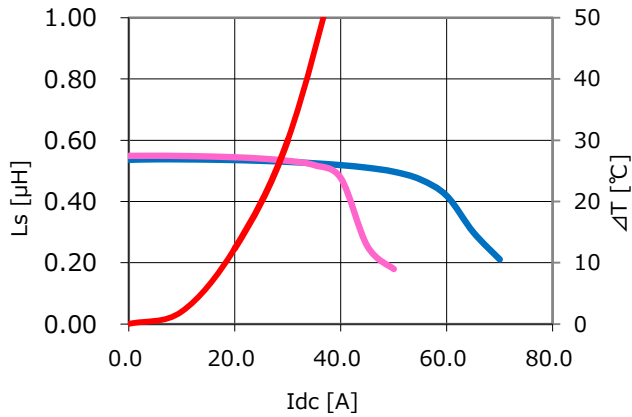


**CDEP15D90T150NP-1R2MC-125**

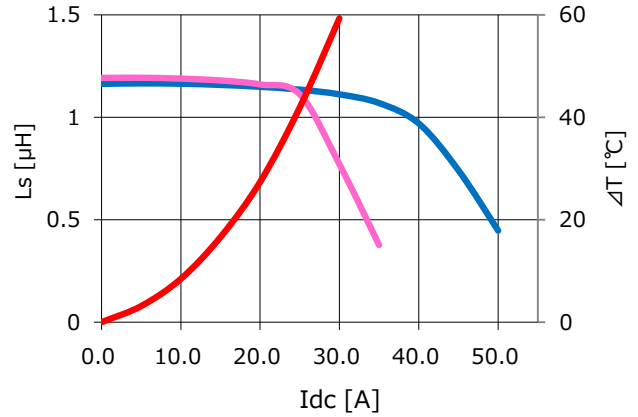


**CDEP15D90T150NP-2R0MC-125**

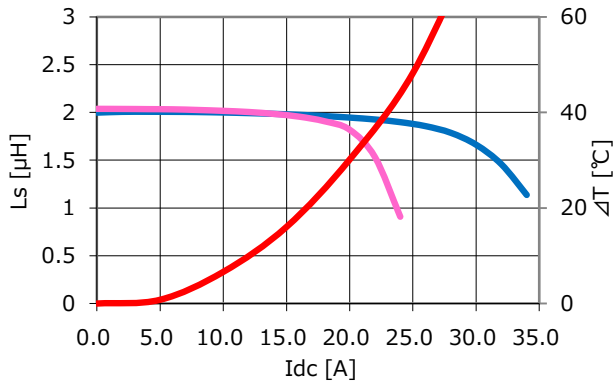


**CDEP15D90T150NP-3R3MC-125**

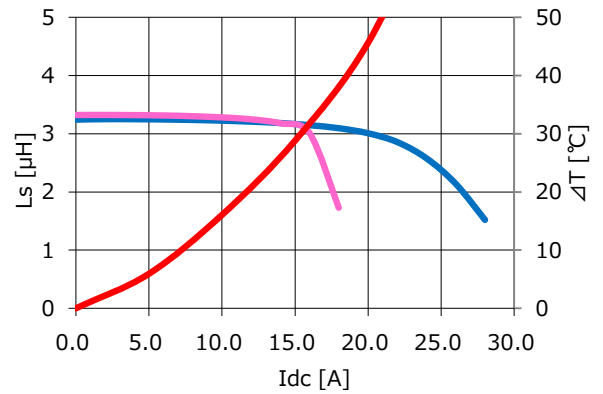

**CDEP15D90T150NP-4R7MC-125**

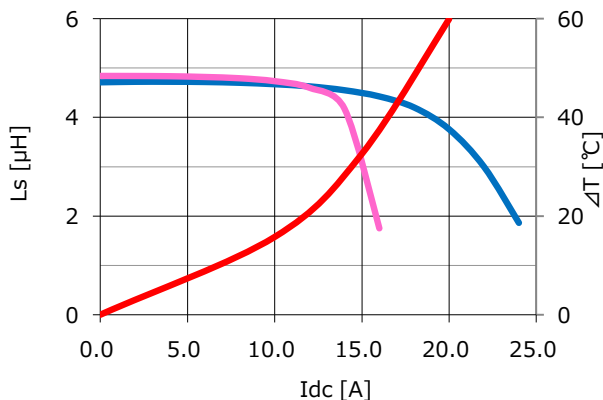

**CDEP15D90T150NP-6R2MC-125**

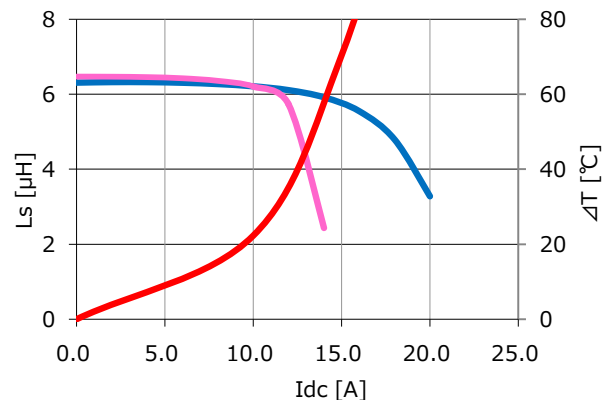


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# Low-Profile High Current Power Inductor


## CDEP15D90/T150




**CDEP15D90T150NP-100MC-125**

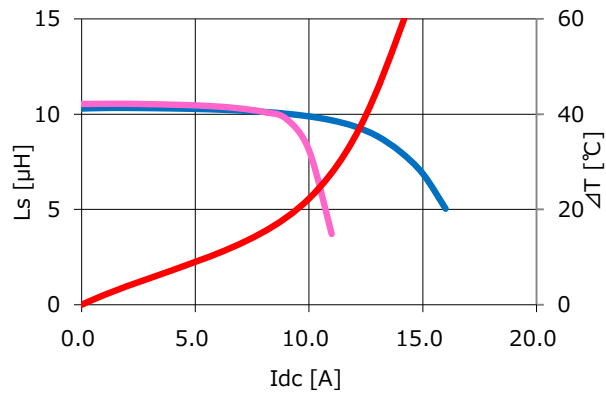


**CDEP15D90T150NP-120MC-125**

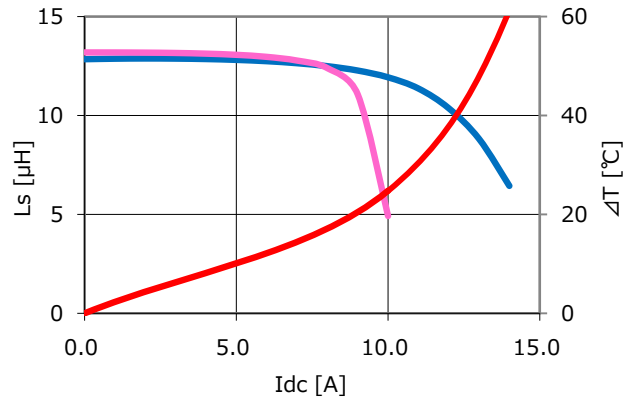

**CDEP15D90T150NP-150MC-125**

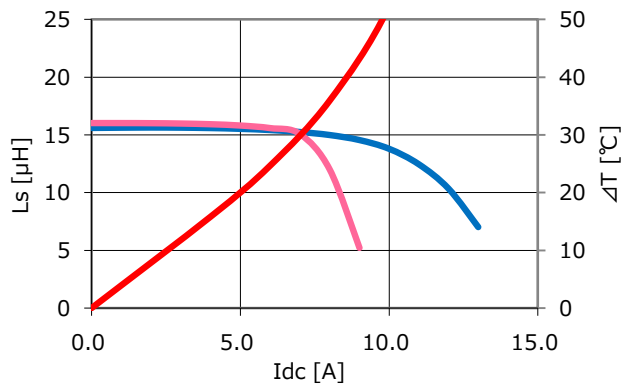

**CDEP15D90T150NP-220MC-125**

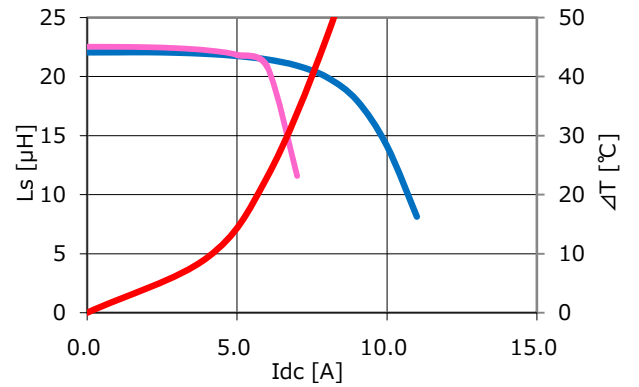


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

# Low-Profile High Current Power Inductor CDEP15D90/T150




Saturation Current & Temperature Rise Graph — L (20°C) — L (150°C) —  $\Delta T$   
<High Power Types>


CDEP15D90T150NP-1R0MC-100

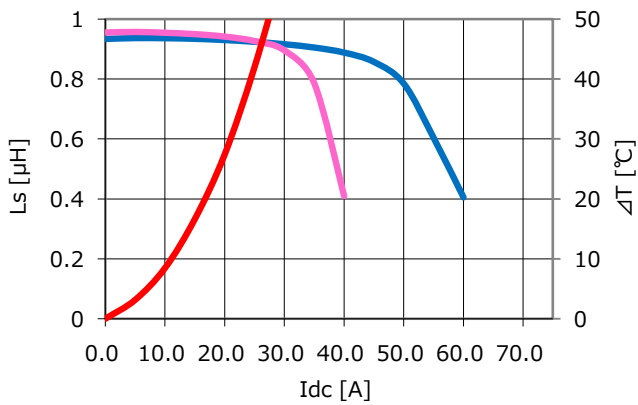


CDEP15D90T150NP-1R6MC-100

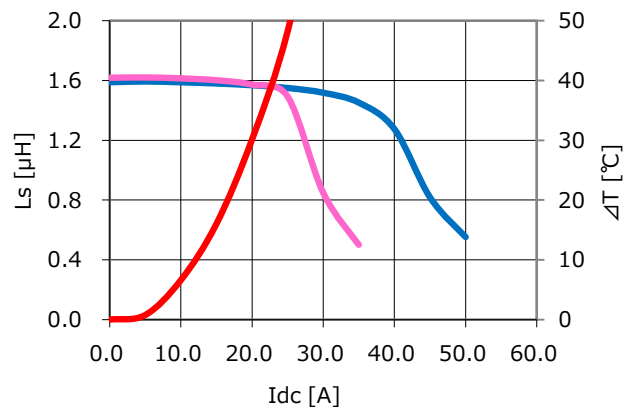


CDEP15D90T150NP-2R4MC-100

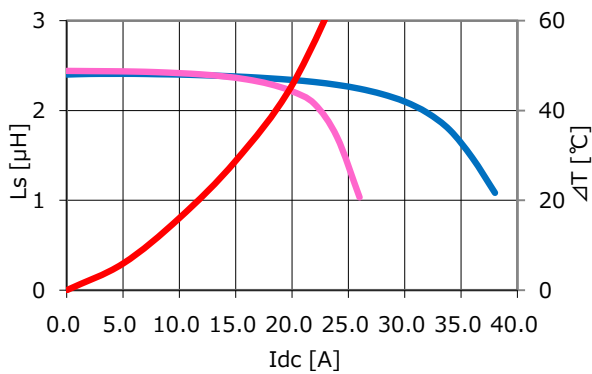


CDEP15D90T150NP-3R6MC-100

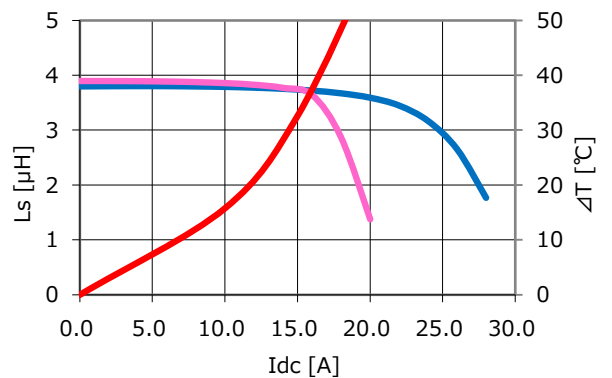

CDEP15D90T150NP-4R7MC-100

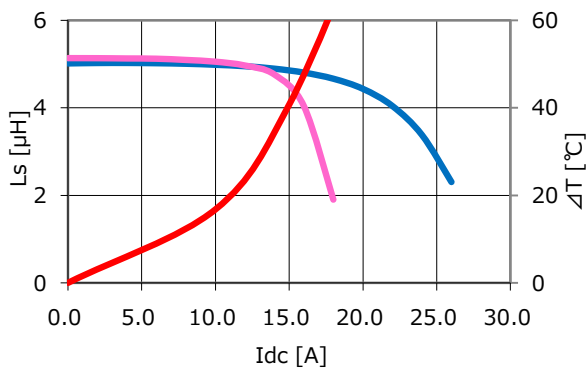

CDEP15D90T150NP-6R8MC-100

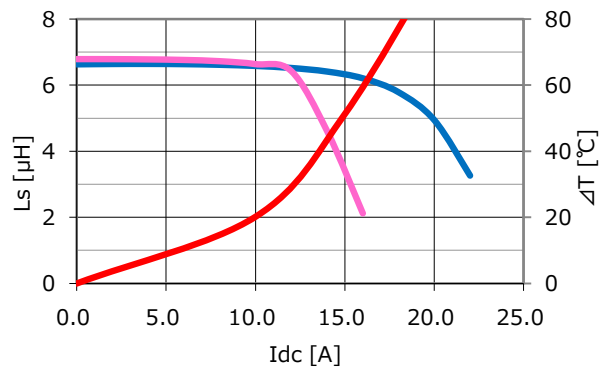


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


# Low-Profile High Current Power Inductor CDEP15D90/T150




**CDEP15D90T150NP-100MC-100**

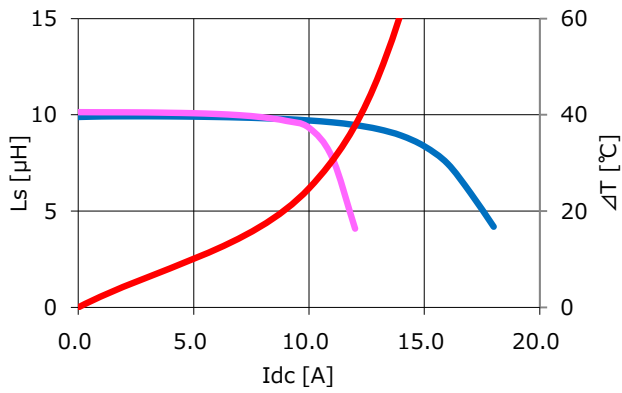


**CDEP15D90T150NP-120MC-100**

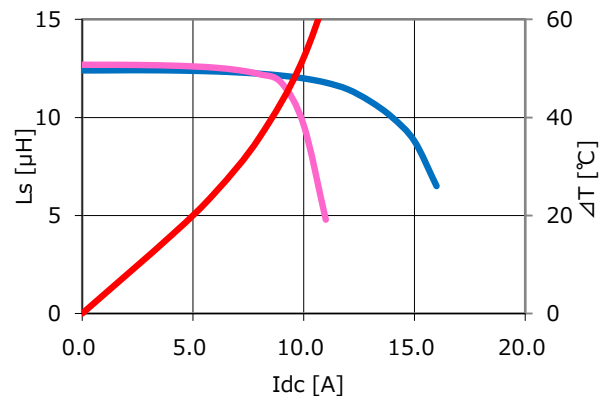

**CDEP15D90T150NP-150MC-100**

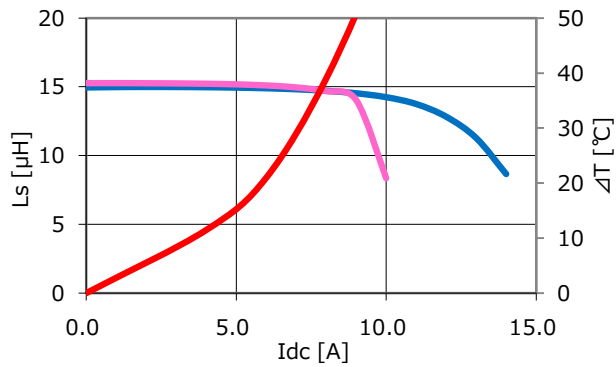

**CDEP15D90T150NP-220MC-100**

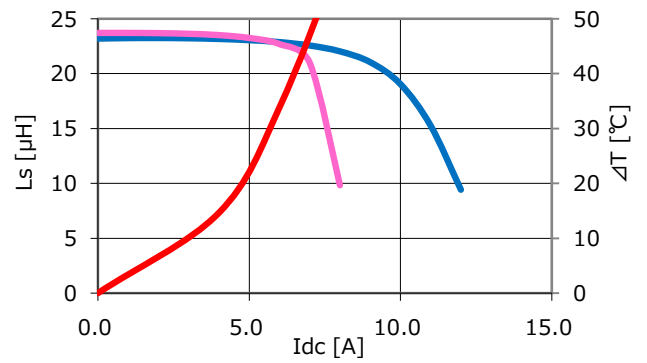

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)