

SMD Power Inductor CDRH50D23/A



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.5 × 5.6 × 2.5 mm Max.
- Product weight: 0.2g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Qualified to AEC-Q200.

Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 11.8" diameter reel
- 2000 pcs per reel

Applications


- Automotive and other high temperature, high reliability application.

Dimension - [mm]

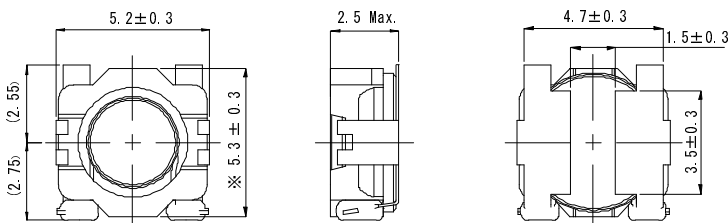

※ that including the solder icicles.

Land pattern and Schematics - [mm]

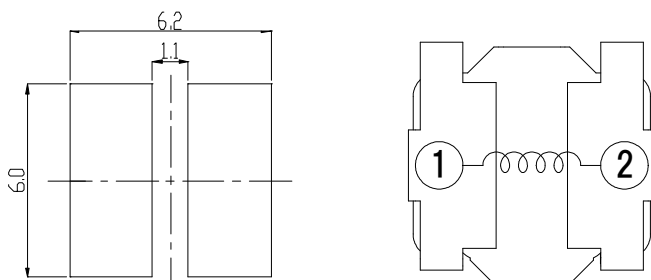

Electrical Characteristics

| Part No. | Stamp | Inductance (μ H) 100kHz [Within] | D.C.R.(m Ω) [Max.] (at 20°C)※1 | Rated current (A) (at 125°C)※2 |
|--------------------|-------|---|--|--------------------------------------|
| CDRH50D23ANP-4R7NC | A | 4.7 ± 30% | 84(67) | 1.23 |
| CDRH50D23ANP-6R8NC | B | 6.8 ± 30% | 124(99) | 0.96 |
| CDRH50D23ANP-100NC | C | 10 ± 30% | 189(151) | 0.82 |
| CDRH50D23ANP-150NC | D | 15 ± 30% | 305(244) | 0.68 |
| CDRH50D23ANP-220NC | E | 22 ± 30% | 390(312) | 0.53 |

※ 1.() are typical value.






※ 2.The rated DC Current indicates the DC current when the inductance decreases to maximum 65% of nominal value or DC current when the temperature of coil is increased to 30°C.The smaller one is defined as DC rated current.

SMD Power Inductor CDRH50D23/A




Saturation Current & Temperature Rise Graph


— L (20°C) — ΔT

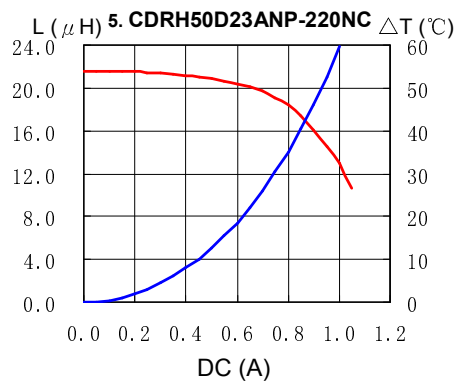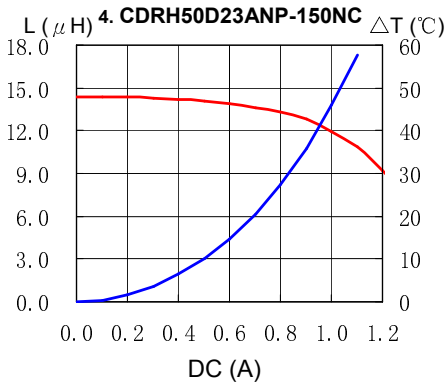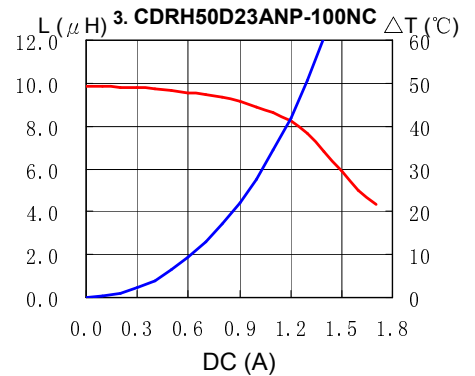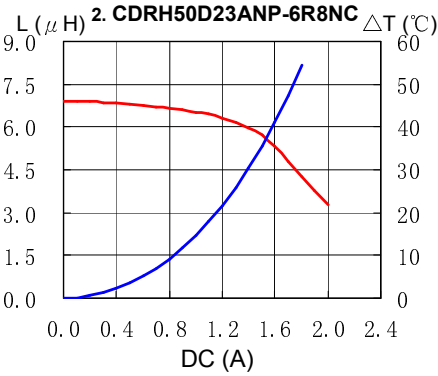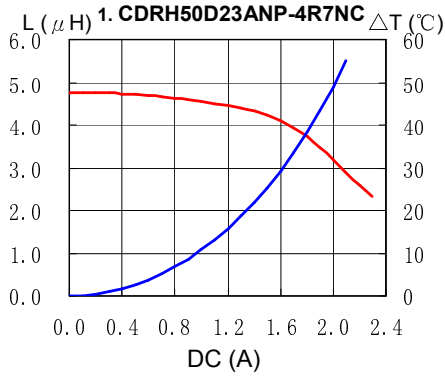

Solder Reflow Condition Heat Endurance

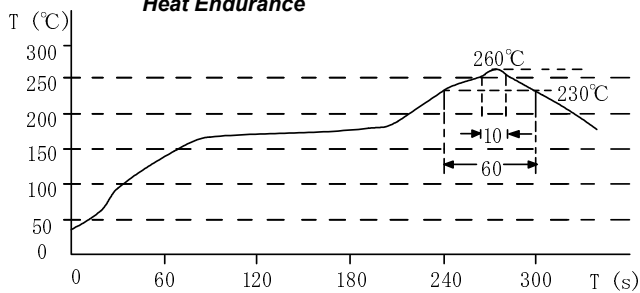

Temperature Chart

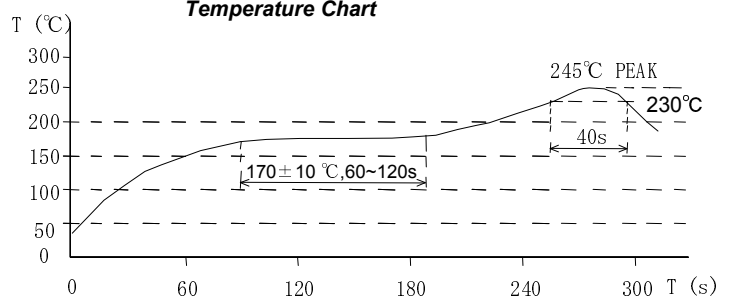

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com
Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com
Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com
Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com
Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com
Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com
Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com
San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)