


# SMD Power Inductor CDRH62B



## Description

- Ferrite drum core construction
- Magnetically shielded
- L × W × H: 6.9 × 6.5 × 3.0mm Max.
- Product weight: 0.35g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 14.5" diameter reel
- 2000pcs per reel


## Applications

- Ideally used in Notebook PC, LCD TV, Game machine, HDD, DSC/DVC, etc as DC-DC converter inductors.

## Dimension - [mm]

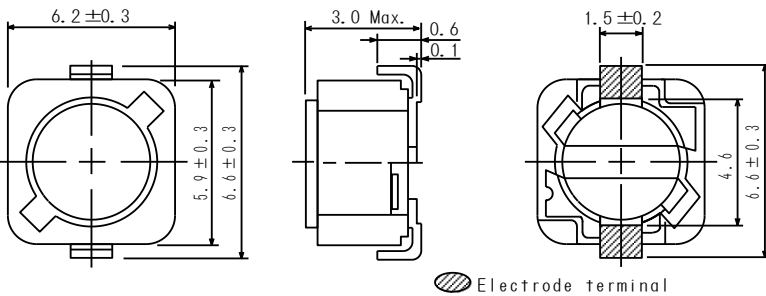

## Land pattern and Schematics - [mm]

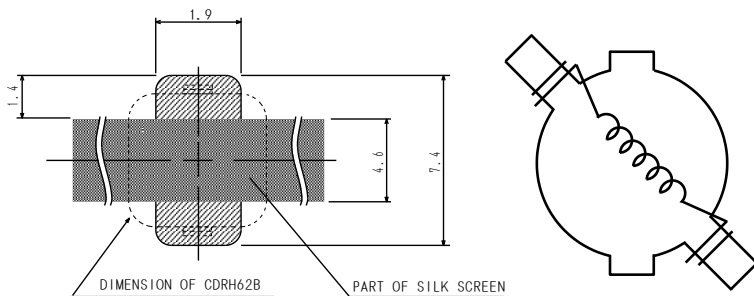



### Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu\text{H}$ ) [ within ] ※1	D.C.R.( $\Omega$ ) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDRH62BNP-2R9NC-B	2R9	2.9+40% -20%	68m (50m)	1.94
CDRH62BNP-4R0NC-B	4R0	4.0+40% -20%	80m (59m)	1.63
CDRH62BNP-5R5NC-B	5R5	5.5+40% -20%	96m (71m)	1.40
CDRH62BNP-6R3NC-B	6R3	6.3+40% -20%	0.10 (77m)	1.30
CDRH62BNP-7R1NC-B	7R1	7.1+40% -20%	0.11 (81m)	1.22
CDRH62BNP-8R0NC-B	8R0	8.0+40% -20%	0.12 (87m)	1.15
CDRH62BNP-100MC-B	100	10±20%	0.15 (0.11)	1.10
CDRH62BNP-120MC-B	120	12±20%	0.20 (0.15)	1.00
CDRH62BNP-150MC-B	150	15±20%	0.23 (0.17)	0.90
CDRH62BNP-180MC-B	180	18±20%	0.27 (0.20)	0.80
CDRH62BNP-220MC-B	220	22±20%	0.34 (0.25)	0.74
CDRH62BNP-270MC-B	270	27±20%	0.38 (0.29)	0.66
CDRH62BNP-330MC-B	330	33±20%	0.45 (0.33)	0.59
CDRH62BNP-390MC-B	390	39±20%	0.49 (0.37)	0.54
CDRH62BNP-470MC-B	470	47±20%	0.69 (0.51)	0.50
CDRH62BNP-560MC-B	560	56±20%	0.78 (0.58)	0.46
CDRH62BNP-680MC-B	680	68±20%	1.07 (0.83)	0.42
CDRH62BNP-820MC-B	820	82±20%	1.21 (0.93)	0.38
CDRH62BNP-101MC-B	101	100±20%	1.39 (1.07)	0.34
CDRH62BNP-121MC-B	121	120±20%	1.90 (1.46)	0.31
CDRH62BNP-151MC-B	151	150±20%	2.18 (1.68)	0.28
CDRH62BNP-181MC-B	181	180±20%	2.77 (2.13)	0.26
CDRH62BNP-221MC-B	221	220±20%	3.12 (2.40)	0.23
CDRH62BNP-271MC-B	271	270±20%	4.38 (3.37)	0.22
CDRH62BNP-331MC-B	331	330±20%	4.94 (3.80)	0.19

※1. Inductance measuring condition: 2.9 $\mu\text{H}$  ~ 8.0 $\mu\text{H}$  at 7.96 MHz  
10 $\mu\text{H}$  ~ 330 $\mu\text{H}$  at 1 kHz


※2. Rated current: The DC current at which the inductance decreases to 75% of it's nominal value or when  $\Delta t=40^\circ\text{C}$ , whichever is lower ( $T_a=20^\circ\text{C}$ ).

# SMD Power Inductor CDRH62B



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$












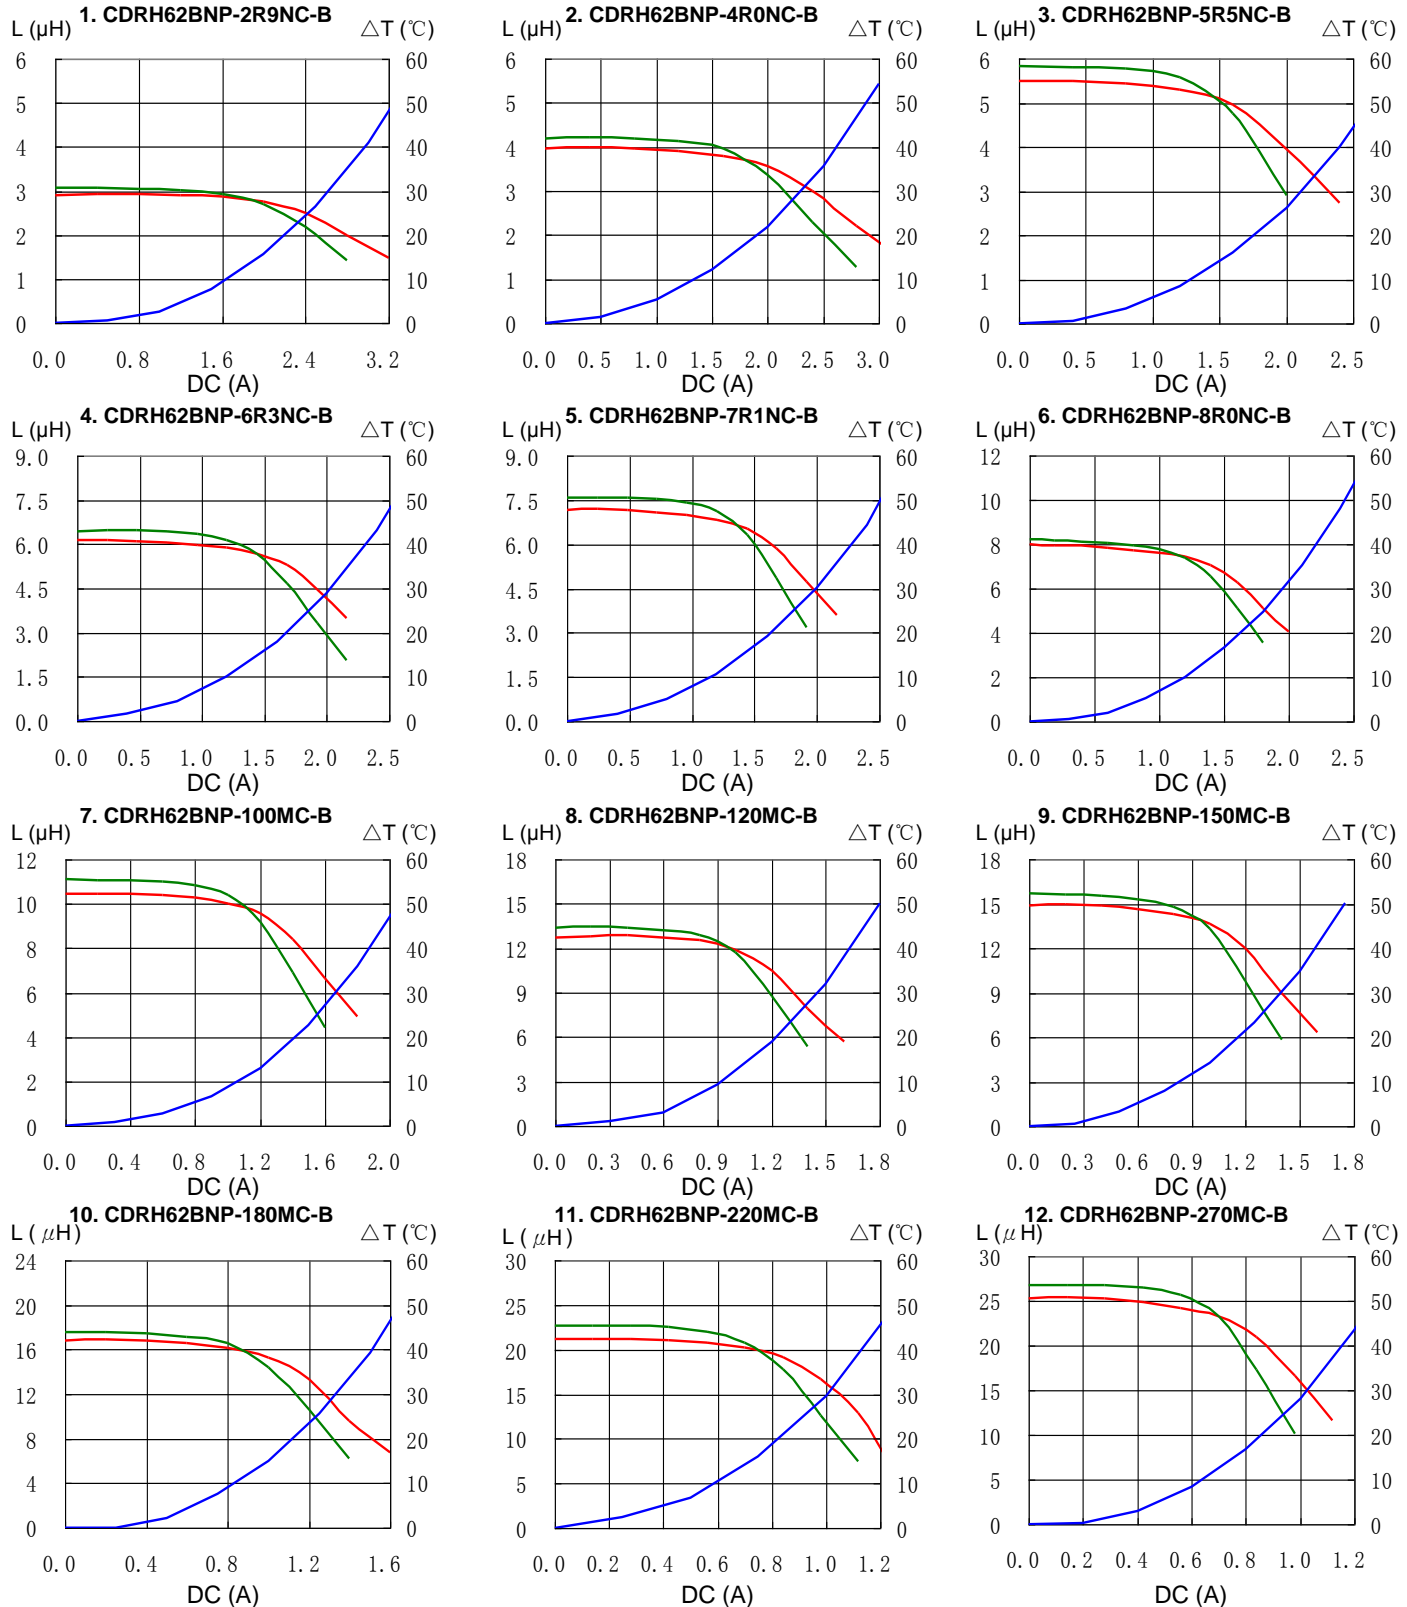


# SMD Power Inductor CDRH62B




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

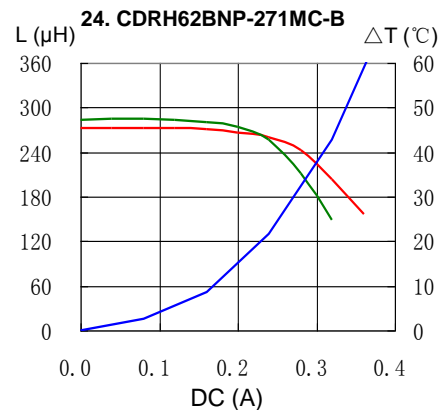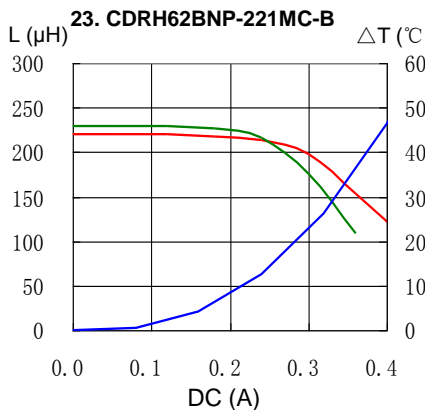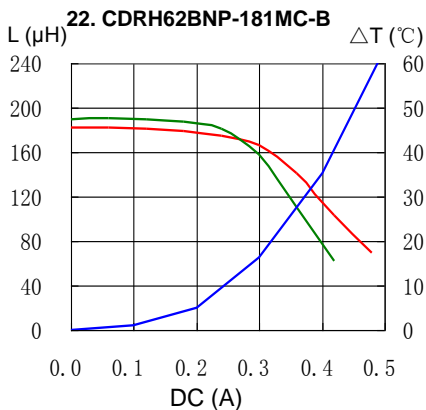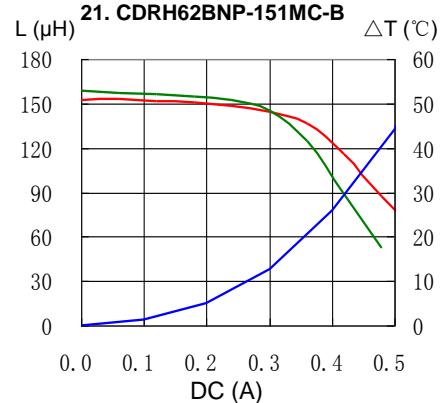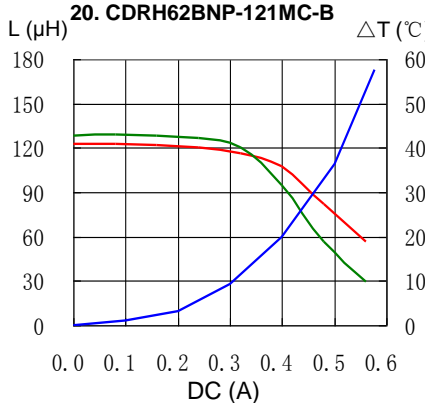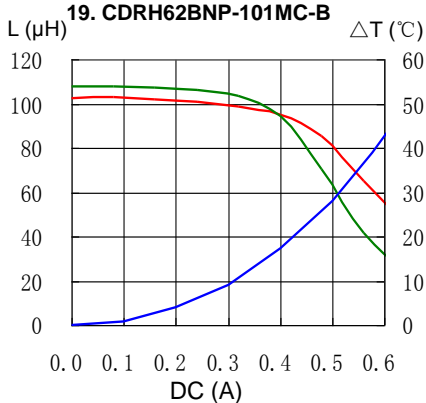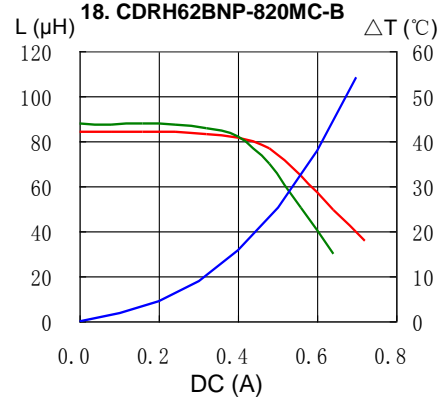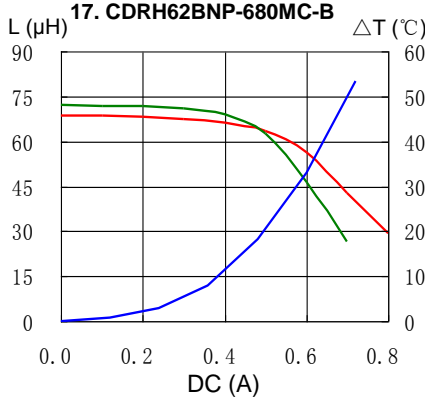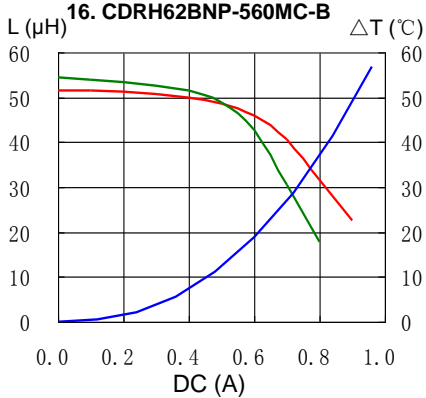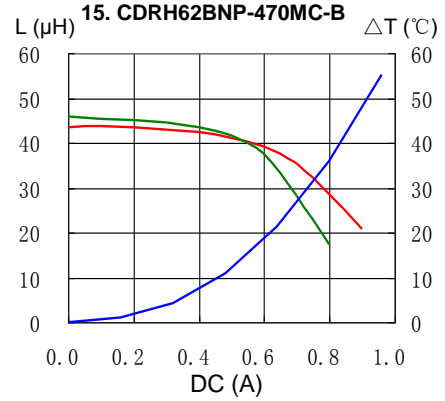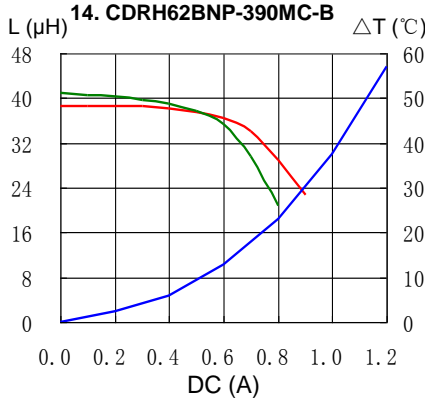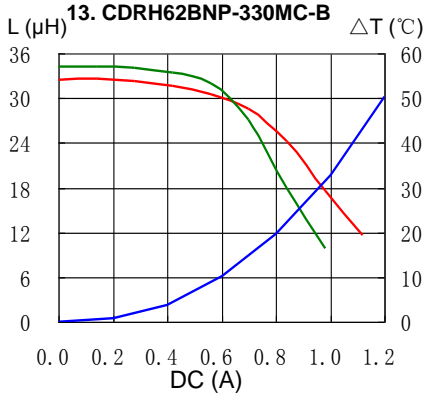


# SMD Power Inductor CDRH62B




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

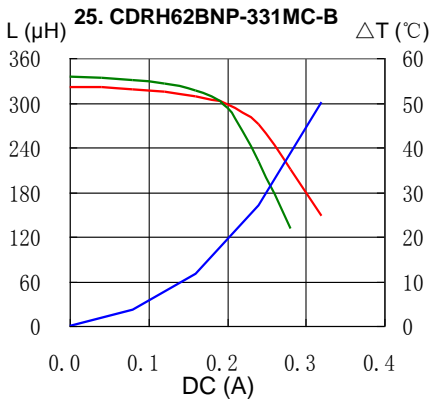


## Solder Reflow Condition

### Heat Endurance

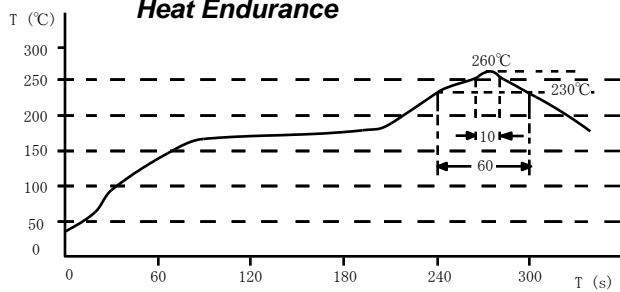

### Temperature Chart

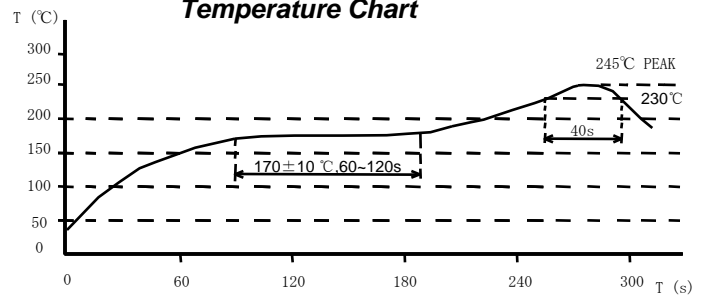

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)  
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)  
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)  
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)  
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)