



SMD Power Inductor CDRH6D18/HP

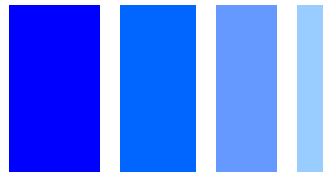

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.0 × 7.0 × 2.0 mm Max.
- Product weight: 0.38g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13" diameter reel
- 2000pcs per reel



Applications

- Ideally used in PDA ,HDD,DSC/DVC, etc as DC-DC converter inductors.


Dimension - [mm]

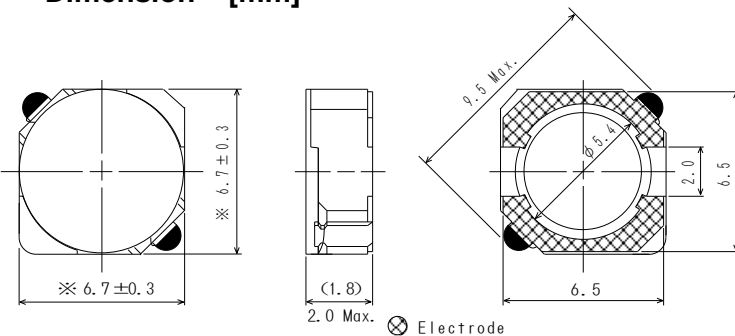

Land pattern and Schematics - [mm]



(1.0µH~8.2µH)



(10µH~120µH)

SMD Power Inductor

CDRH6D18/HP



Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (m Ω) [within] (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				at 20°C	at 105°C	
CDRH6D18HPNP-1R0PC	1R0	1.0 \pm 25%	18.5 \pm 25%	5.50	4.60	4.00
CDRH6D18HPNP-1R8PC	1R8	1.8 \pm 25%	24.0 \pm 25%	4.50	3.50	3.50
CDRH6D18HPNP-2R7PC	2R7	2.7 \pm 25%	35.5 \pm 25%	3.60	3.00	2.75
CDRH6D18HPNP-3R9PC	3R9	3.9 \pm 25%	45.5 \pm 25%	3.00	2.50	2.35
CDRH6D18HPNP-4R7PC	4R7	4.7 \pm 25%	53.0 \pm 25%	2.80	2.35	2.20
CDRH6D18HPNP-6R8PC	6R8	6.8 \pm 25%	82.0 \pm 25%	2.35	1.95	1.70
CDRH6D18HPNP-8R2PC	8R2	8.2 \pm 25%	98.0 \pm 25%	2.10	1.80	1.50
CDRH6D18HPNP-100PC	100	10 \pm 25%	125 \pm 25%	1.95	1.60	1.30
CDRH6D18HPNP-150PC	150	15 \pm 25%	190 \pm 25%	1.60	1.30	1.10
CDRH6D18HPNP-220PC	220	22 \pm 25%	220 \pm 25%	1.35	1.10	1.00
CDRH6D18HPNP-330PC	330	33 \pm 25%	374 \pm 25%	1.10	0.90	0.70
CDRH6D18HPNP-470PC	470	47 \pm 25%	535 \pm 25%	0.90	0.70	0.60
CDRH6D18HPNP-560PC	560	56 \pm 25%	605 \pm 25%	0.85	0.65	0.55
CDRH6D18HPNP-680PC	680	68 \pm 25%	758 \pm 25%	0.70	0.60	0.50
CDRH6D18HPNP-820PC	820	82 \pm 25%	859 \pm 25%	0.65	0.58	0.45
CDRH6D18HPNP-101PC	101	100 \pm 25%	970 \pm 25%	0.60	0.55	0.40
CDRH6D18HPNP-121PC	121	120 \pm 25%	1290 \pm 25%	0.58	0.50	0.35

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of its nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

SMD Power Inductor CDRH6D18/HP




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT





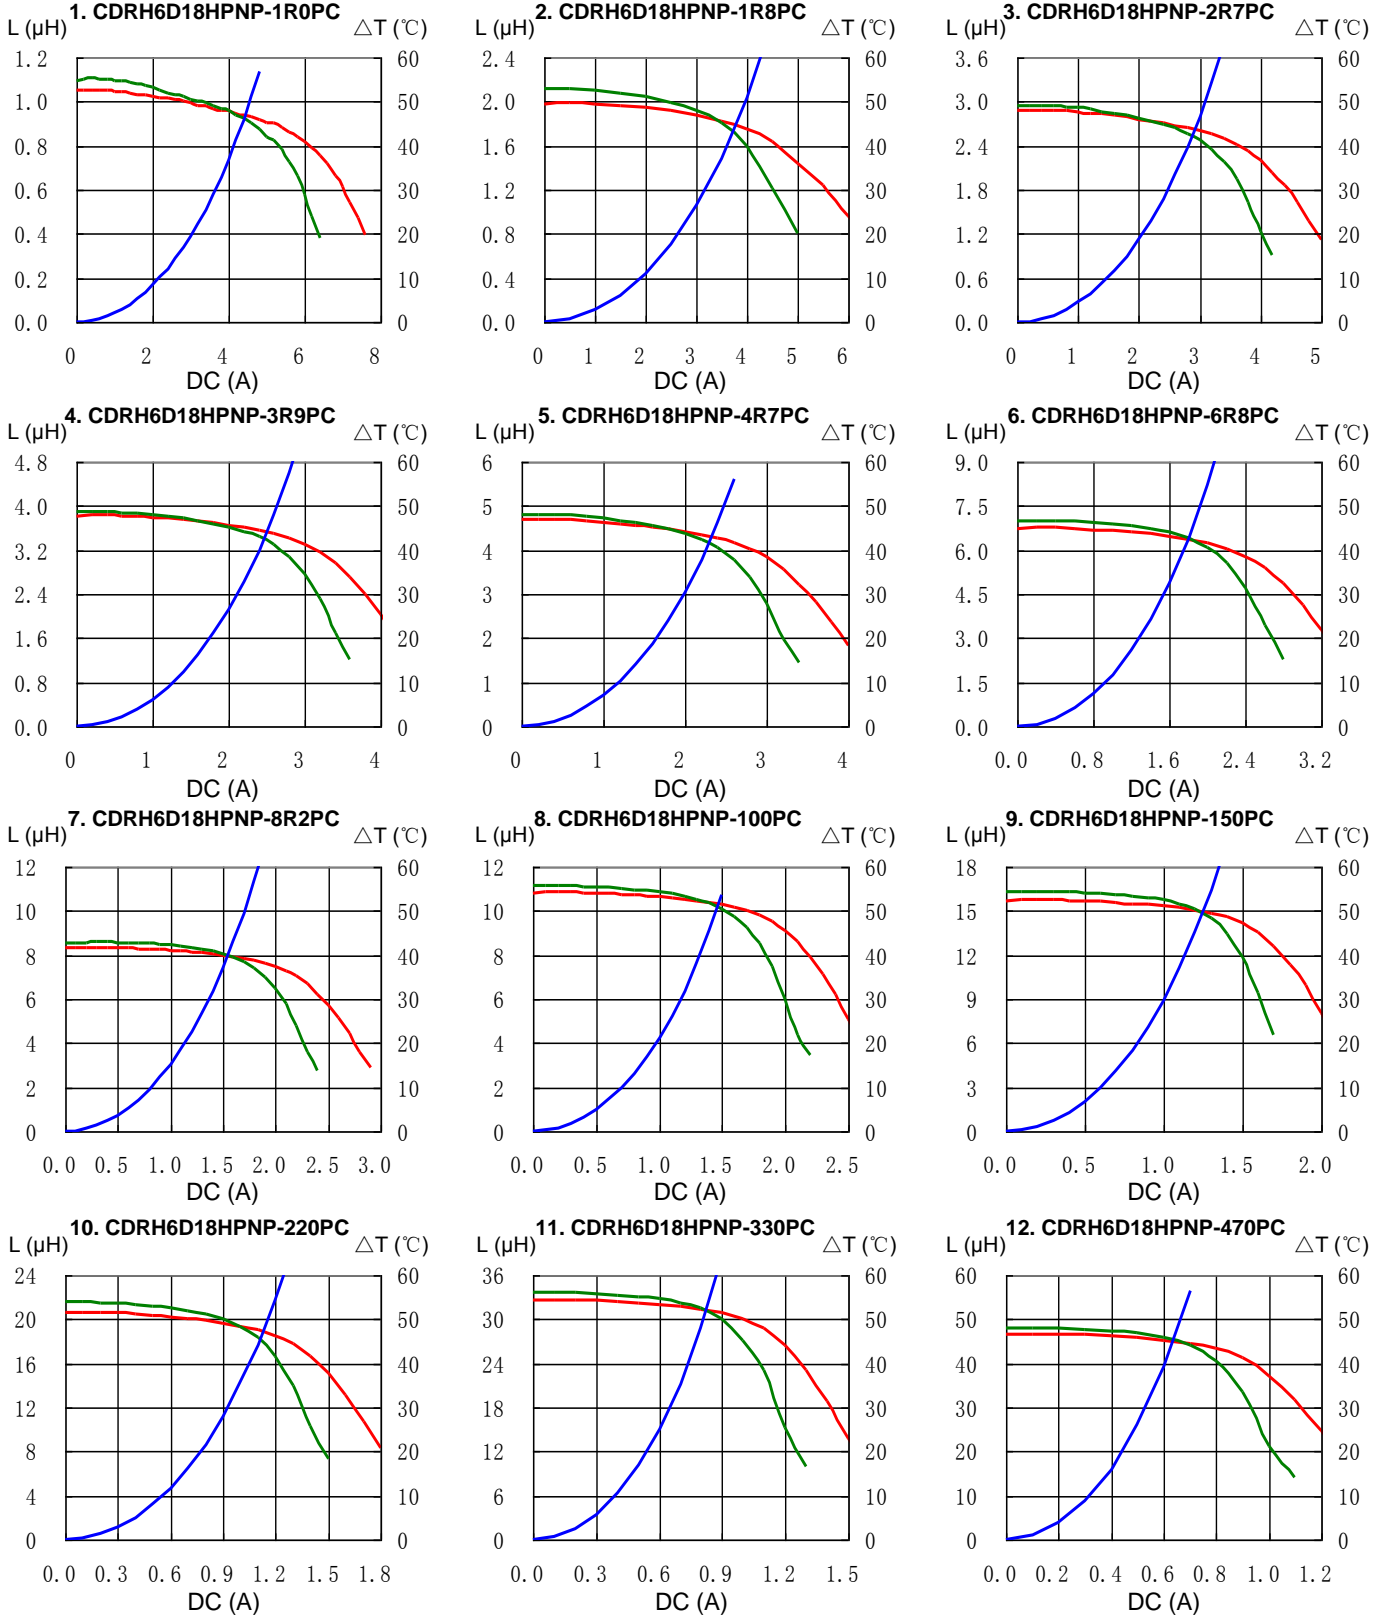


SMD Power Inductor CDRH6D18/HP

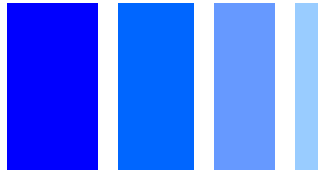


Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

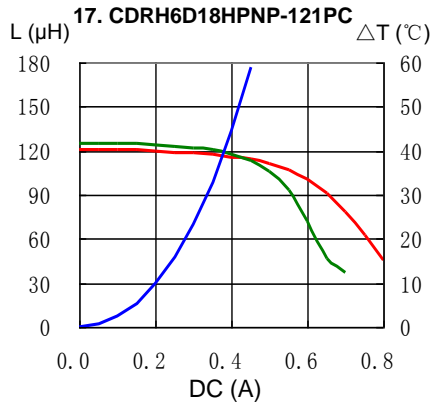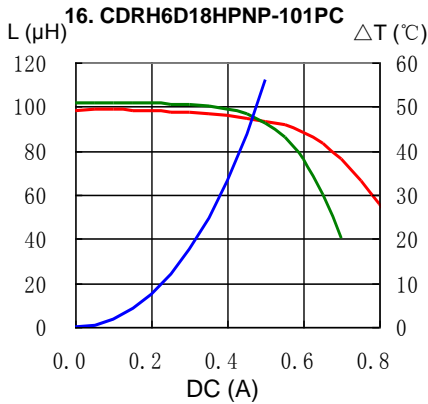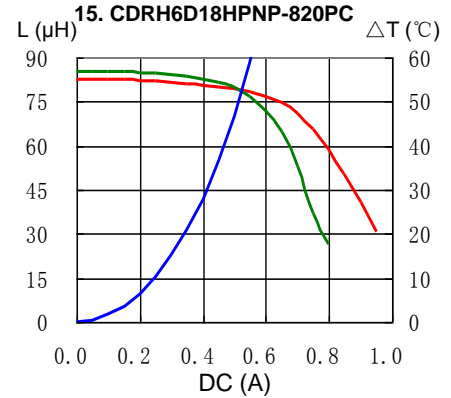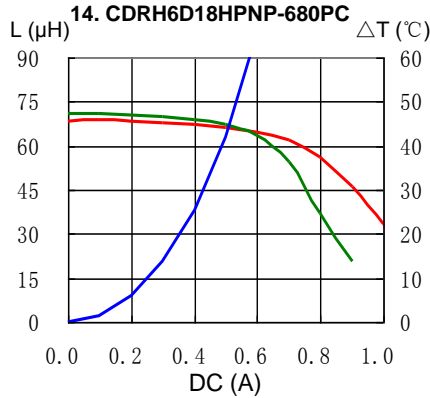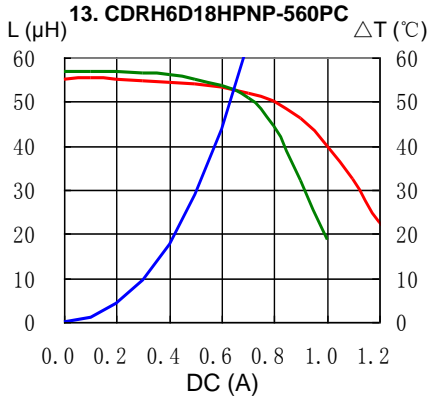


Solder Reflow Condition

Heat Endurance

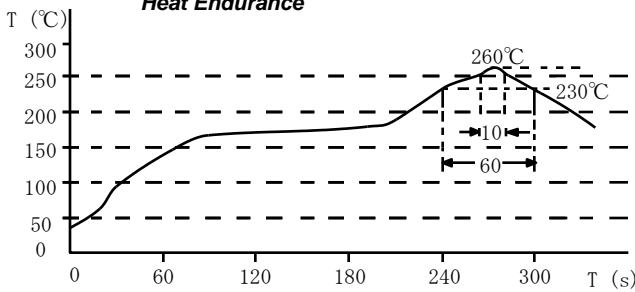

Temperature Chart

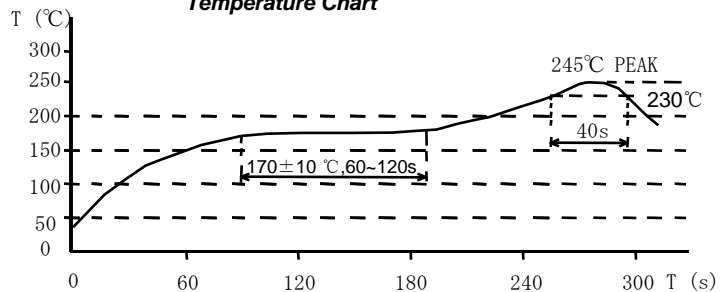

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)