

SMD Power Inductor CDRH70D45B/T150



Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


Dimension [mm]

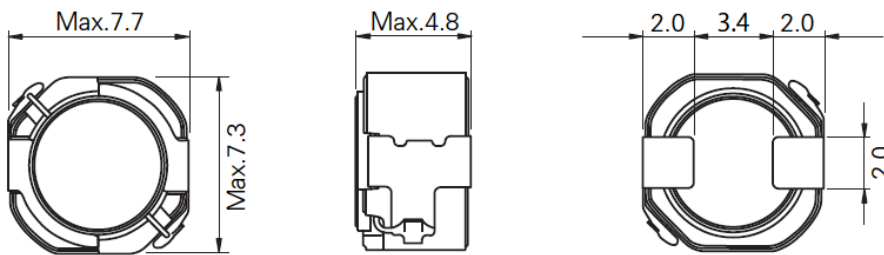


Reference Land pattern [mm]

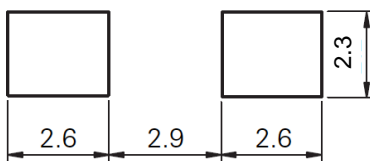

Stamp Example

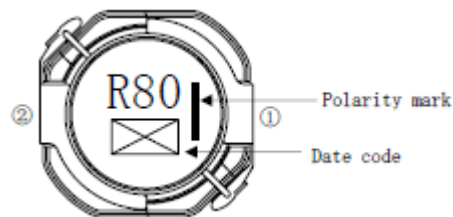

Connection (Bottom View)



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH70D45B/T150



Electrical Characteristics

Part No.	Inductance (μH) ※1	D.C.R (m Ω) ($\pm 30\%$)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH70D45BT150NP-R80NC	0.8 $\pm 30\%$	7.0	10.7	9.40
CDRH70D45BT150NP-1R2NC	1.2 $\pm 30\%$	8.0	8.40	8.70
CDRH70D45BT150NP-1R5NC	1.5 $\pm 30\%$	9.0	7.40	8.40
CDRH70D45BT150NP-2R2NC	2.2 $\pm 30\%$	10.0	6.20	7.60
CDRH70D45BT150NP-3R3NC	3.3 $\pm 30\%$	13.0	5.10	6.70
CDRH70D45BT150NP-4R7NC	4.7 $\pm 30\%$	14.0	4.20	6.20
CDRH70D45BT150NP-6R8NC	6.8 $\pm 30\%$	22.0	3.60	5.10
CDRH70D45BT150NP-100MC	10 $\pm 20\%$	33.0	3.00	3.80
CDRH70D45BT150NP-150MC	15 $\pm 20\%$	55.0	2.40	3.10
CDRH70D45BT150NP-220MC	22 $\pm 20\%$	69.0	2.00	2.60
CDRH70D45BT150NP-330MC	33 $\pm 20\%$	97.0	1.60	2.20
CDRH70D45BT150NP-470MC	47 $\pm 20\%$	130	1.30	1.97
CDRH70D45BT150NP-680MC	68 $\pm 20\%$	190	1.10	1.57
CDRH70D45BT150NP-101MC	100 $\pm 20\%$	300	0.92	1.23
CDRH70D45BT150NP-151MC	150 $\pm 20\%$	430	0.74	1.05
CDRH70D45BT150NP-221MC	220 $\pm 20\%$	550	0.62	0.91
CDRH70D45BT150NP-331MC	330 $\pm 20\%$	920	0.51	0.67
CDRH70D45BT150NP-471MC	470 $\pm 20\%$	1350	0.43	0.54
CDRH70D45BT150NP-681MC	680 $\pm 20\%$	1750	0.35	0.50

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH70D45B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH70D45BT150NP-R80NC

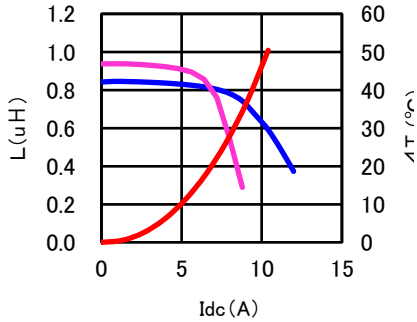


CDRH70D45BT150NP-1R2NC

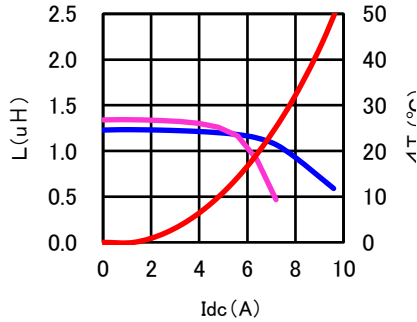


CDRH70D45BT150NP-1R5NC

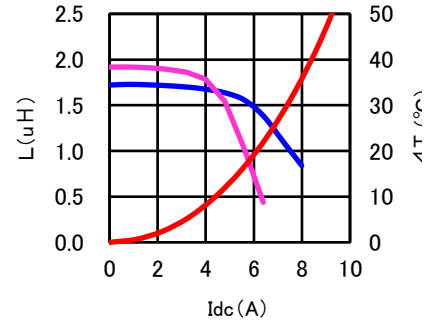


CDRH70D45BT150NP-2R2NC

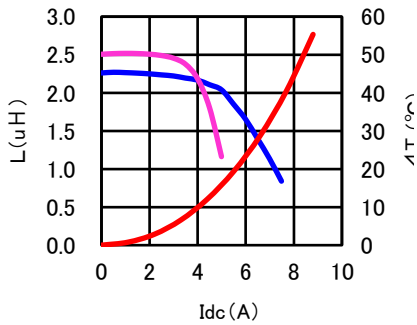


CDRH70D45BT150NP-3R3NC

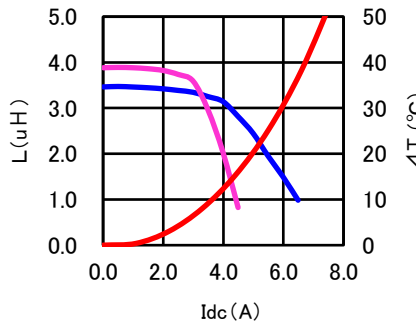


CDRH70D45BT150NP-4R7NC

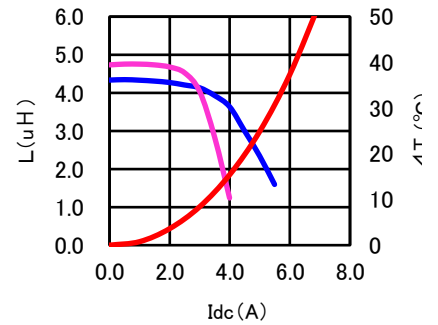


CDRH70D45BT150NP-6R8NC

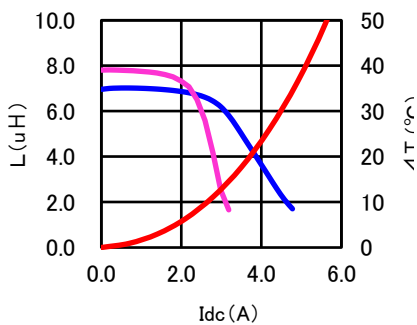

CDRH70D45BT150NP-100MC

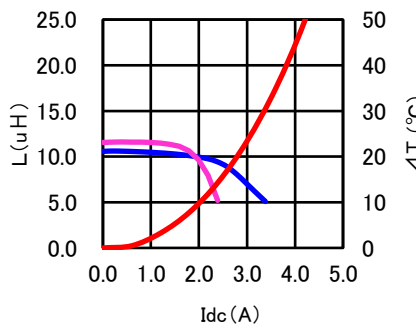

CDRH70D45BT150NP-150MC

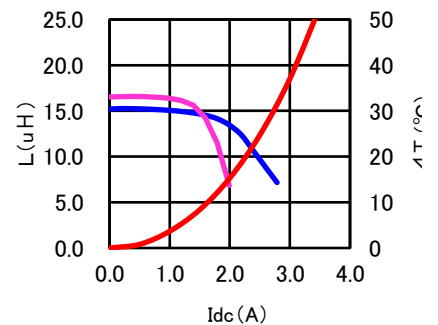


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH70D45B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH70D45BT150NP-220MC

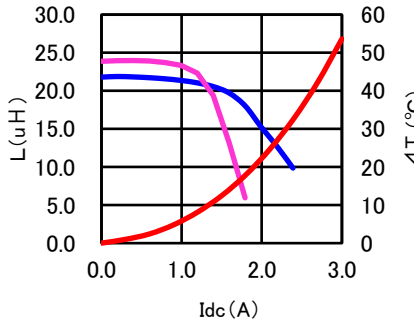


CDRH70D45BT150NP-330MC

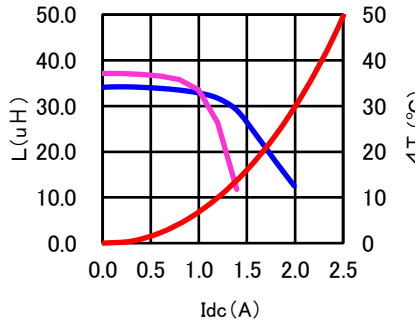


CDRH70D45BT150NP-470MC

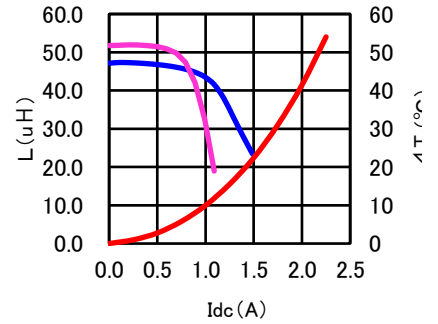


CDRH70D45BT150NP-680MC

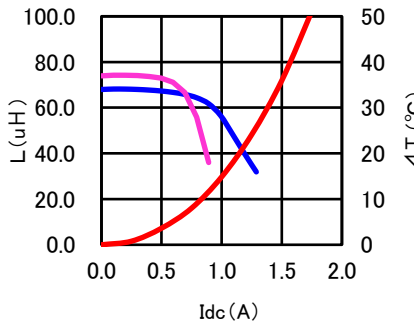


CDRH70D45BT150NP-101MC

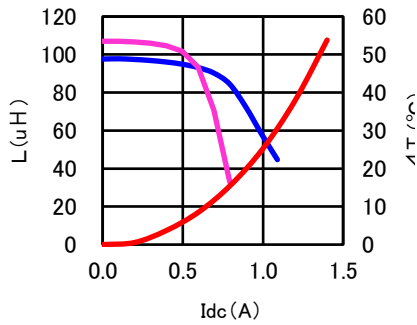


CDRH70D45BT150NP-151MC

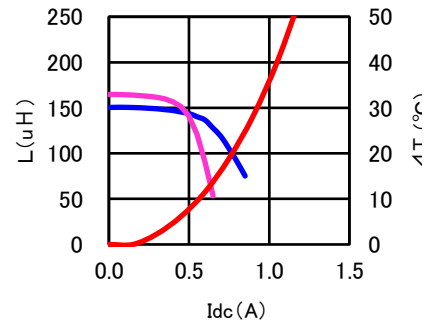


CDRH70D45BT150NP-221MC

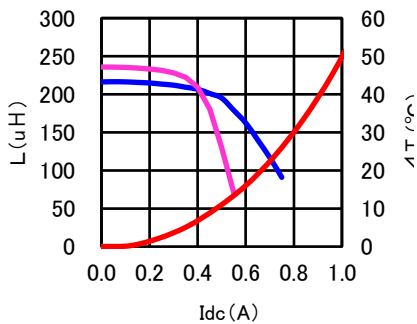

CDRH70D45BT150NP-331MC

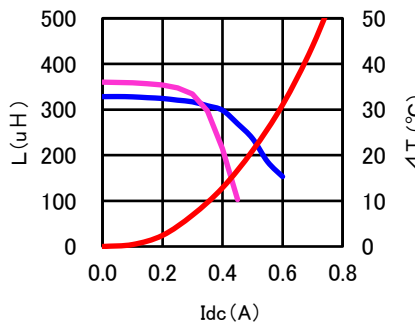

CDRH70D45BT150NP-471MC

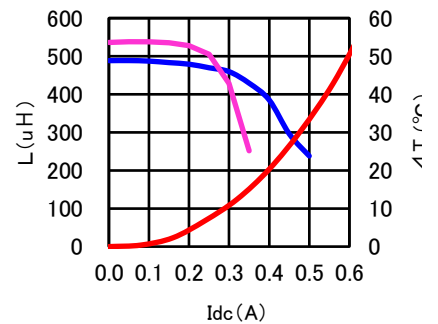


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH70D45B/T150



Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT

CDRH70D45BT150NP-681MC

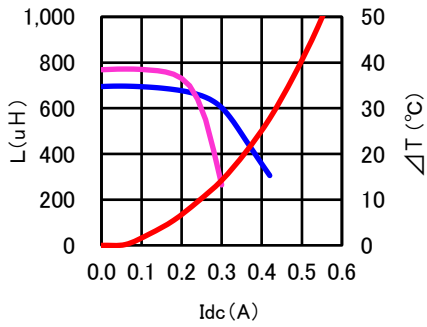

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sumida](#) manufacturer:

Other Similar products are found below :

[RCH108NP-100M](#) [RCH895NP-181K](#) [W3B2S-40/13-BLK-S](#) [CDRH127NP-680MC](#) [RCH895NP-471K](#) [CDRH6D38NP-7R4NC](#)
[CDRH104RT125NP-2R2PC](#) [R10-1-3/4-BLK-S](#) [ESMIT-4180/A](#) [CDRH8D43NP-330NC](#) [B2-1-BLK-S](#) [B2-3/64-BLK-S](#) [CDRH4D22HPNP-6R3NC](#) [RCR875DNP-100L](#) [RCH110NP-471K](#) [CDRH105RNP-150NC](#) [CMD4D13NP-680MC](#) [RCP1317NP-151L](#) [A2-1/4-CLR-S](#)
[RCR875DNP-222K](#) [H-ML-2](#) [A2-1/16-CLR-S](#) [CDEP85NP-R45MC-50](#) [CDRH103RNP-100NC-B](#) [CDRH5D28RNP-2R5NC](#) [CD30D22HF-2R2MC](#) [CDEP147NP-4R7MC-95](#) [RCH110NP-180M](#) [RCH110NP-331K](#) [CDRH3D28NP-3R3NC](#) [CDRH8D28HPNP-4R7NC](#) [CDRH4D18NP-100NC](#) [RCR875DNP-4R7L](#) [B2-1/16-BLK-S](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#)
[CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR54NP-181KC](#) [CR75NP-270KC](#) [CR75NP-820KC](#) [CDC5D23BNP-5R6MC](#) [CDEP127NP-120MC](#)