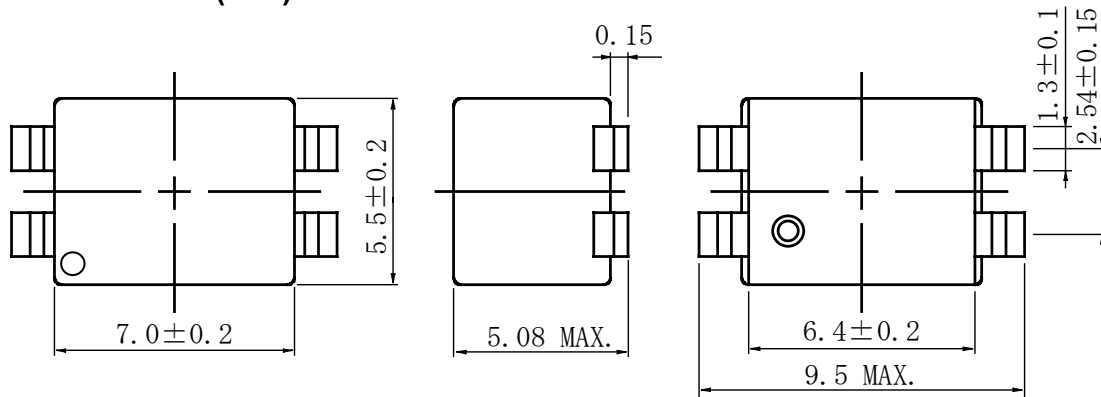


Type: CPFC74
◆ Product Description

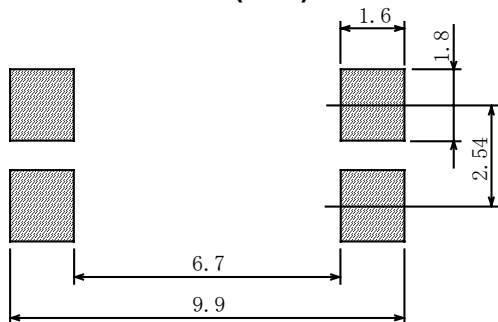
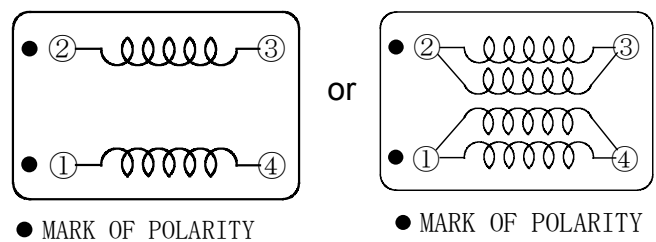
- 9.5×5.7mm Max.(L×W), 5.1mm Max. Height .

◆ Feature

- Ideally used in CAN BUS ,AV,OA equipment.
- RoHS Compliance


◆ Dimensions (mm)


* Dimension does not include solder used on coil.

◆ Land Pattern (mm)

◆ Schematics (Bottom)

◆ Specification (For CAN bus)

Part Name.	Stamp	Impedance (Ω) (L1,L2 Parallel) (10~100MHz)	Insulation Resistance (MΩ)(Coil-Coil) (DC80V 1min)	Withstanding Voltage (coil-coil) (5sec)	D.C.R. (Ω) (1-2)at 20°C (3-4) short ※
CPFC74NP-CB1ØM4	C10M	1000 MIN.	100 MIN.	200V DC	0.6 MAX.
CPFC74NP-CBØ8M6	C08M	800 MIN.	100 MIN.	200V DC	0.5 MAX.

※ D.C.R. is measured by 2 lines as series because impedance will be deteriorated when D.C.R. is measured by 1 line.

Type: CPFC74
◆ Specification (For Power supply)

Part Name.	Stamp	Impedance (Ω) (L1,L2 Parallel)	Insulation Resistance (M Ω)(Coil-Coil) (DC100V 1min.)	Withstanding Voltage (Coil-Coil) (5sec)	D.C.R. (m Ω) (1-2)at 20 $^{\circ}$ C (3-4) Short ※2	Rated Current (1-2)(A) (3-4) Short ※1
CPFC74NP-PS1 \emptyset H2A15	P15H	700 MIN. (100 MHz)	10 MIN.	D.C.125V	120	1.5
CPFC74NP-PS \emptyset 2H2A2 \emptyset	P20H	200 MIN. (20~300MHz)	10 MIN.	D.C.125V	120	2.0
CPFC74NP-PS \emptyset 3H2A25	P25H	300 MIN. (160 MHz)	10 MIN.	D.C.125V	120	2.5
CPFC74NP-PS \emptyset 1H2A3 \emptyset	P30H	100 MIN.	10 MIN.	D.C.125V	60	3.0

※1: Rated current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$.($T_a=20^{\circ}\text{C}$).

※2: D.C.R is measured by 2 lines as series because impedance will be deteriorated when D.C.R. is measured by 1 line.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)