

# PIN Power Inductor RCH1216B



## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 12.5 × 12.5 × 16.0mm Max.
- Product weight: 5.2g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -30°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -30°C ~ +100°C


## Packaging

- Box packaging.


## Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.


## Dimension - [mm]

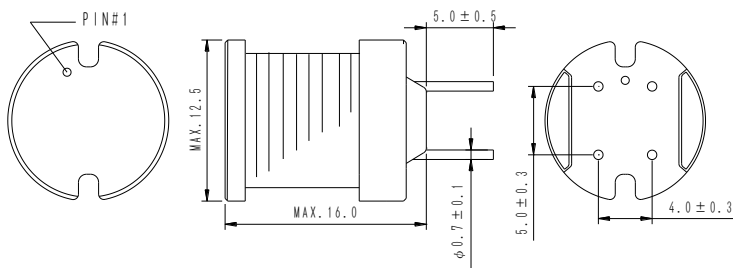


## Schematics - [mm]



(10μH~47μH)



(56μH~2.2mH)

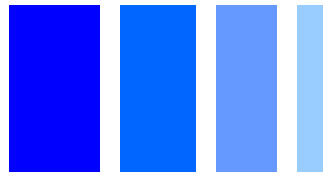

### Electrical Characteristics


PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. [MAX.](Ω) at 20℃	DC SUPERPOSITION PERMISSION CURRENT (A)※2		TEMPERATURE RISE CURRENT (A) ※3
				at 20℃	at 100℃	
RCH1216BNP-100M	100M	10μH ±20%	24m(19m)	9.00	8.00	5.00
RCH1216BNP-120M	120M	12μH ±20%	26m(21m)	7.80	7.00	4.60
RCH1216BNP-150M	150M	15μH ±20%	29m(23m)	7.20	6.20	4.40
RCH1216BNP-180M	180M	18μH ±20%	33m(26m)	6.75	5.80	4.20
RCH1216BNP-220M	220M	22μH ±20%	37m(29m)	6.00	5.30	4.00
RCH1216BNP-270M	270M	27μH ±20%	41m(32m)	5.50	4.80	3.80
RCH1216BNP-330M	330M	33μH ±20%	46m(36m)	5.00	4.50	3.60
RCH1216BNP-390M	390M	39μH ±20%	49m(39m)	4.70	4.10	3.30
RCH1216BNP-470M	470M	47μH ±20%	56m(44m)	4.30	3.80	3.20
RCH1216BNP-560K	560K	56μH ±10%	87m(69m)	4.10	3.70	2.70
RCH1216BNP-680K	680K	68μH ±10%	98m(78m)	3.80	3.30	2.40
RCH1216BNP-820K	820K	82μH ±10%	107m(85m)	3.20	2.90	2.25
RCH1216BNP-101K	101K	100μH ±10%	121m(96m)	3.00	2.70	2.15
RCH1216BNP-121K	121K	120μH ±10%	134m(107m)	2.85	2.60	2.05
RCH1216BNP-151K	151K	150μH ±10%	156m(124m)	2.55	2.35	1.90
RCH1216BNP-181K	181K	180μH ±10%	206m(164m)	2.20	2.05	1.65
RCH1216BNP-221K	221K	220μH ±10%	236m(188m)	2.00	1.85	1.55
RCH1216BNP-271K	271K	270μH ±10%	0.32(0.25)	1.85	1.70	1.40
RCH1216BNP-331K	331K	330μH ±10%	0.37(0.29)	1.65	1.53	1.30
RCH1216BNP-391K	391K	390μH ±10%	0.48(0.38)	1.55	1.35	1.05
RCH1216BNP-471K	471K	470μH ±10%	0.55(0.44)	1.45	1.25	1.00
RCH1216BNP-561K	561K	560μH ±10%	0.62(0.49)	1.36	1.18	0.95
RCH1216BNP-681K	681K	680μH ±10%	0.79(0.63)	1.20	1.06	0.82
RCH1216BNP-821K	821K	820μH ±10%	0.88(0.70)	1.14	0.97	0.75
RCH1216BNP-102K	102K	1.0mH ±10%	1.13(0.90)	1.00	0.80	0.65
RCH1216BNP-122K	122K	1.2mH ±10%	1.25(1.00)	0.89	0.76	0.61
RCH1216BNP-152K	152K	1.5mH ±10%	1.52(1.26)	0.85	0.70	0.54
RCH1216BNP-182K	182K	1.8mH ±10%	1.93(1.60)	0.76	0.63	0.46
RCH1216BNP-222K	222K	2.2mH ±10%	2.52(2.10)	0.65	0.57	0.41

※1. Inductance measuring condition: at 1kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# PIN Power Inductor RCH1216B

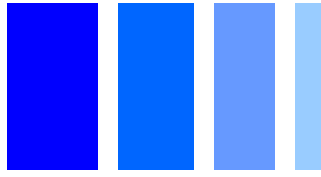


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$












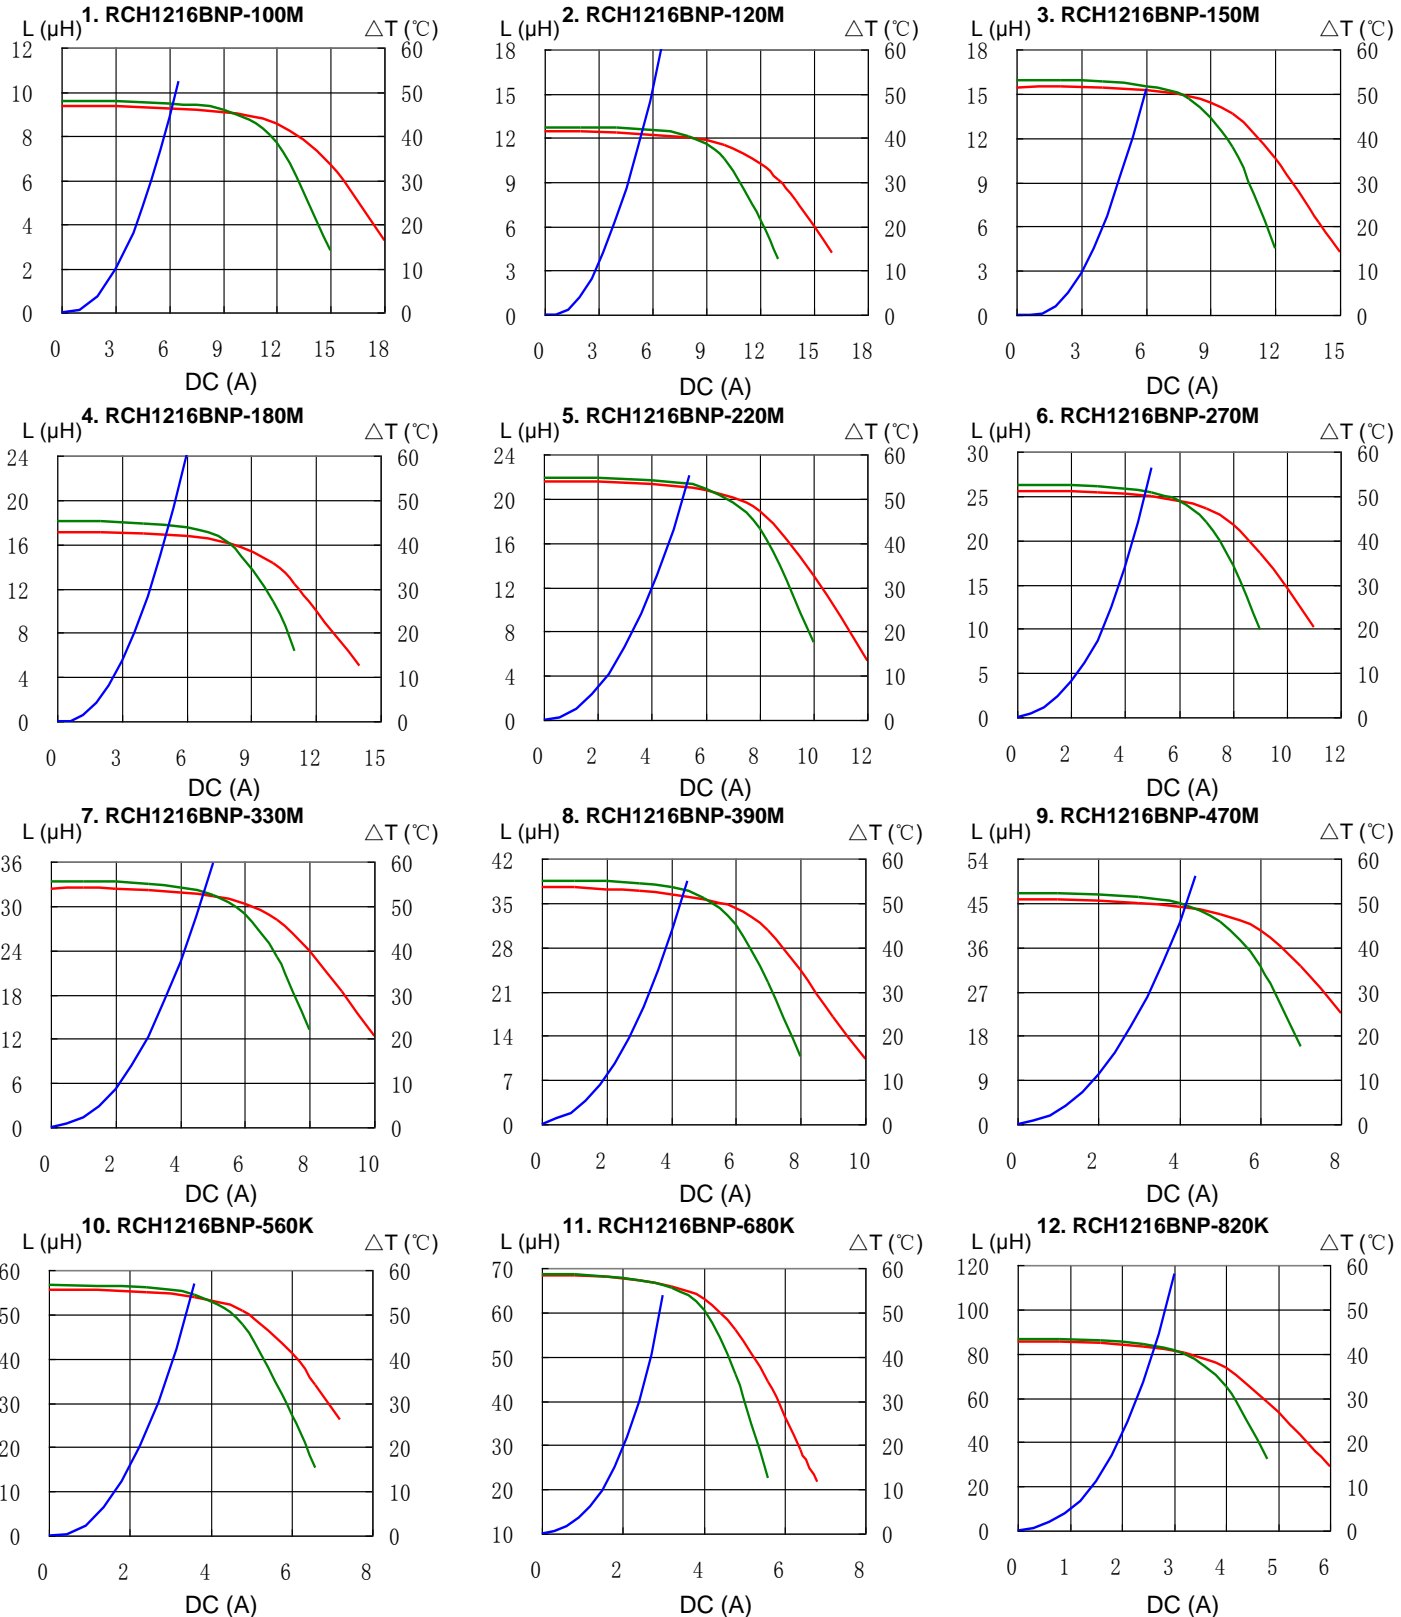


# PIN Power Inductor RCH1216B

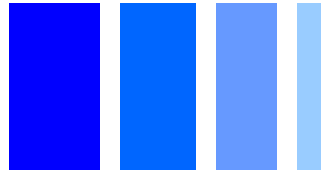

## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

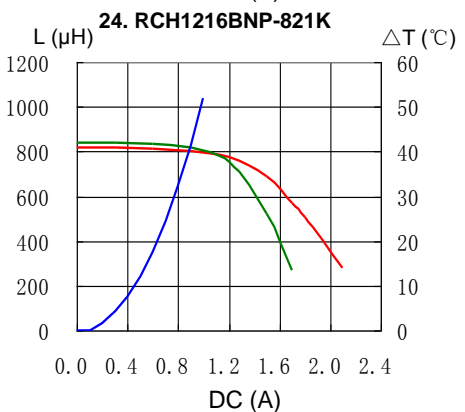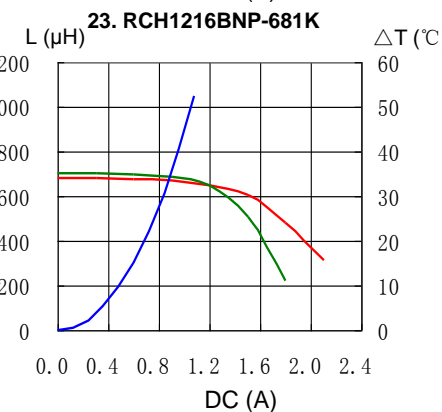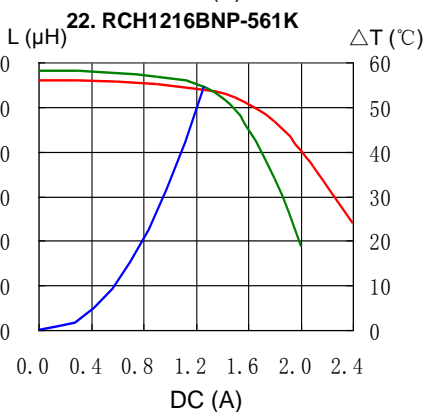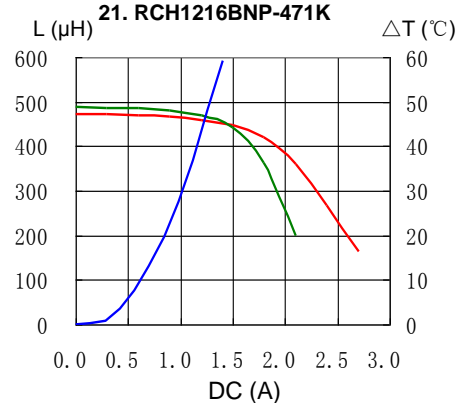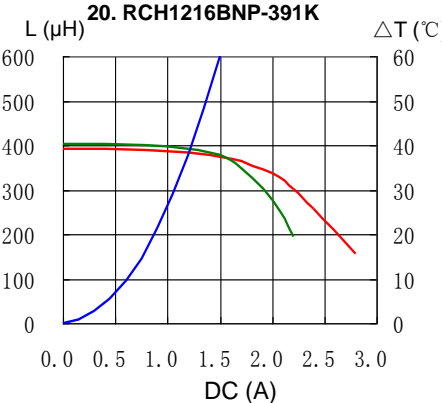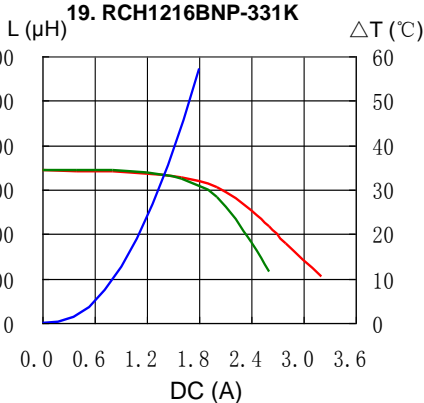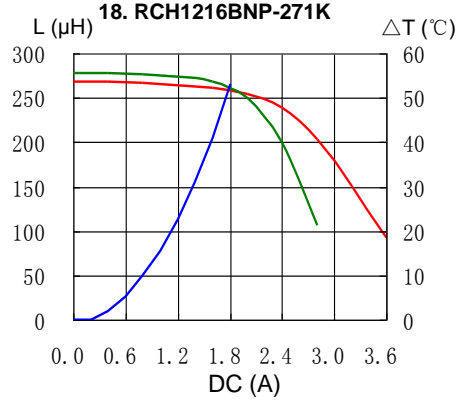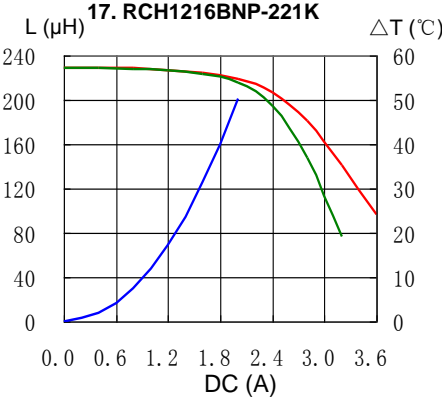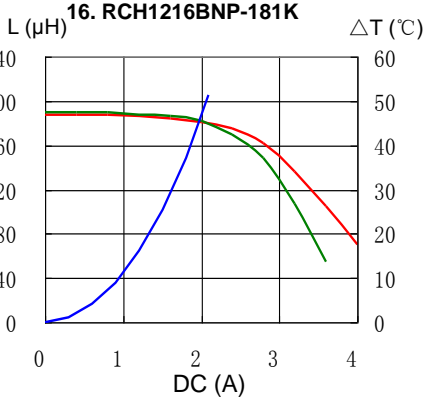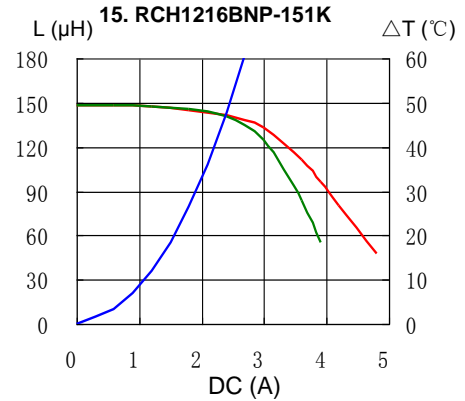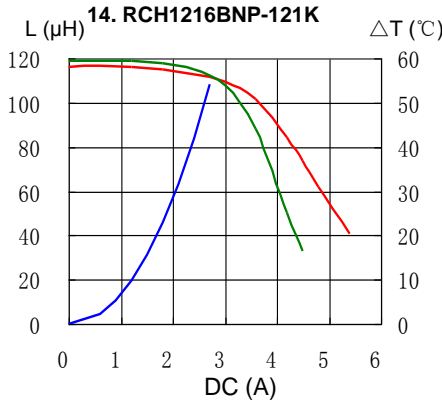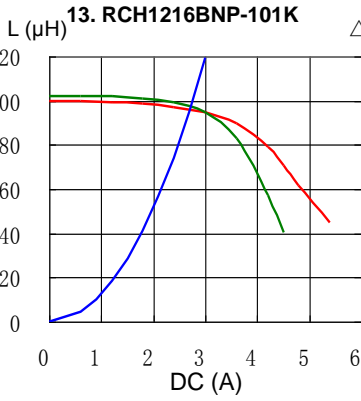


# PIN Power Inductor RCH1216B



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

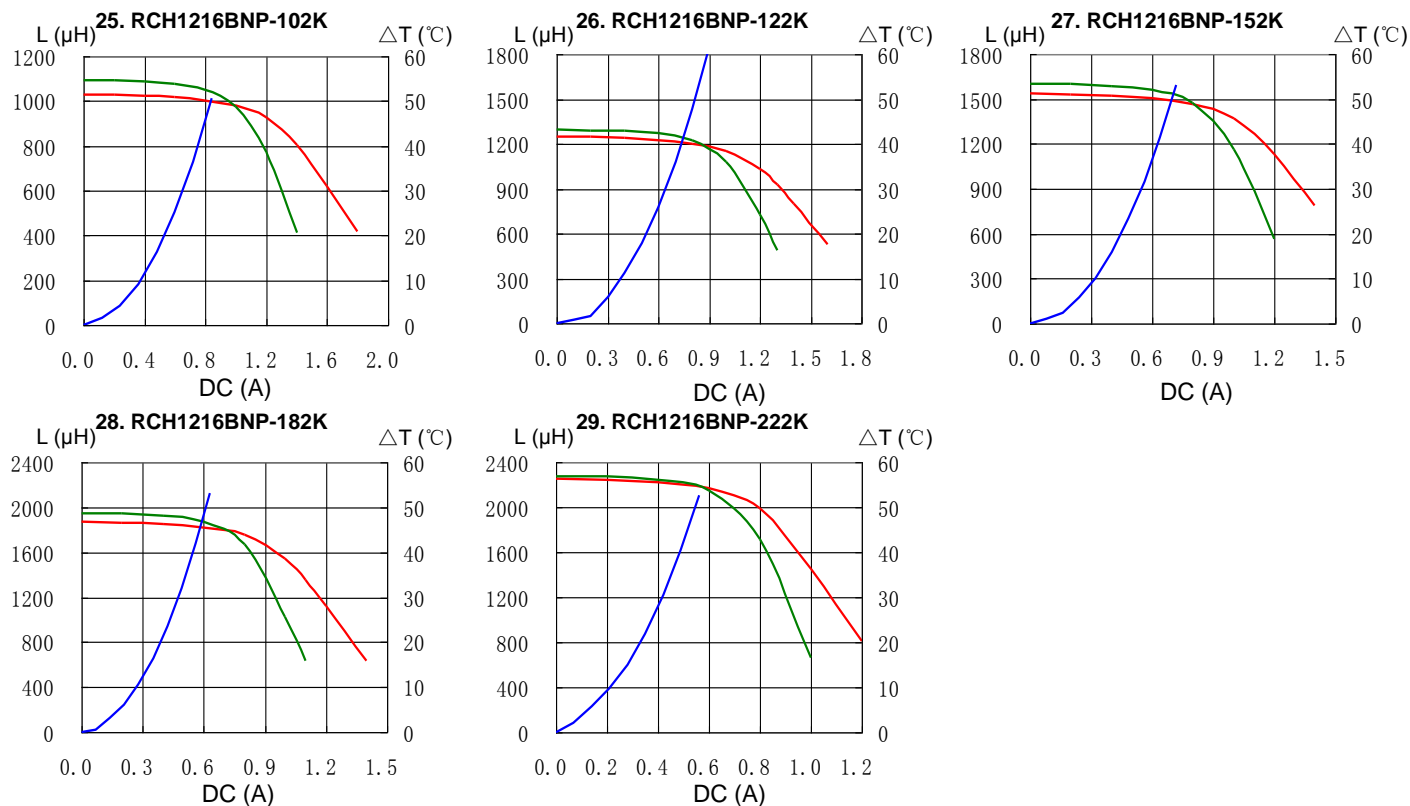

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
 FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
 FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
 FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
 FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
 FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
 FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
 FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
 FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
 FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
 FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
 FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)  
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)