

PIN Power Inductor RCR-110D



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.5 × 10.5mm Max.
- Product weight: 2.7 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+85°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+85°C


Packaging

- Box packaging.


Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.

Dimension - [mm]

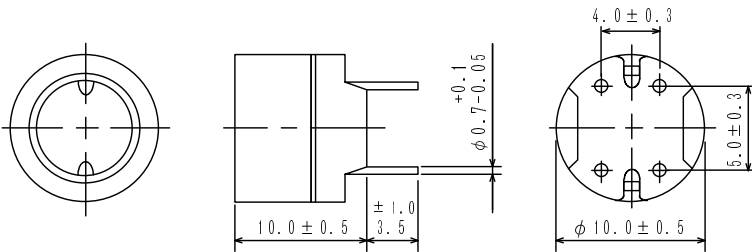

Schematics - [mm]



PIN Power Inductor RCR-110D



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (Ω) [Max.] (at 20°C)	Rated Current (A) ※2
RCR110DNP-100M	100M	10 μ H \pm 20%	0.023	3.51
RCR110DNP-120M	120M	12 μ H \pm 20%	0.024	3.24
RCR110DNP-150M	150M	15 μ H \pm 20%	0.036	2.88
RCR110DNP-180M	180M	18 μ H \pm 20%	0.039	2.61
RCR110DNP-220M	220M	22 μ H \pm 20%	0.042	2.34
RCR110DNP-270M	270M	27 μ H \pm 20%	0.045	2.16
RCR110DNP-330L	330L	33 μ H \pm 15%	0.057	1.89
RCR110DNP-390L	390L	39 μ H \pm 15%	0.076	1.80
RCR110DNP-470L	470L	47 μ H \pm 15%	0.10	1.62
RCR110DNP-560L	560L	56 μ H \pm 15%	0.11	1.44
RCR110DNP-680L	680L	68 μ H \pm 15%	0.15	1.35
RCR110DNP-820L	820L	82 μ H \pm 15%	0.16	1.26
RCR110DNP-101L	101L	100 μ H \pm 15%	0.19	1.08
RCR110DNP-121L	121L	120 μ H \pm 15%	0.21	0.99
RCR110DNP-151L	151L	150 μ H \pm 15%	0.23	0.90
RCR110DNP-181L	181L	180 μ H \pm 15%	0.26	0.82
RCR110DNP-221L	221L	220 μ H \pm 15%	0.29	0.74
RCR110DNP-271L	271L	270 μ H \pm 15%	0.36	0.67
RCR110DNP-331L	331L	330 μ H \pm 15%	0.51	0.61
RCR110DNP-391L	391L	390 μ H \pm 15%	0.69	0.55
RCR110DNP-471L	471L	470 μ H \pm 15%	0.98	0.51
RCR110DNP-561L	561L	560 μ H \pm 15%	1.1	0.46
RCR110DNP-681L	681L	680 μ H \pm 15%	1.2	0.42
RCR110DNP-821L	821L	820 μ H \pm 15%	1.3	0.38
RCR110DNP-102L	102L	1.0mH \pm 15%	1.5	0.35

※1 Inductance Measuring condition at 1kHz .













※2 Rated current: The DC current at which the inductance decreases 90% of it's initial value or when $\Delta t=40^{\circ}\text{C}$ whichever is lower ($T_a=20^{\circ}\text{C}$).

PIN Power Inductor RCR-110D



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

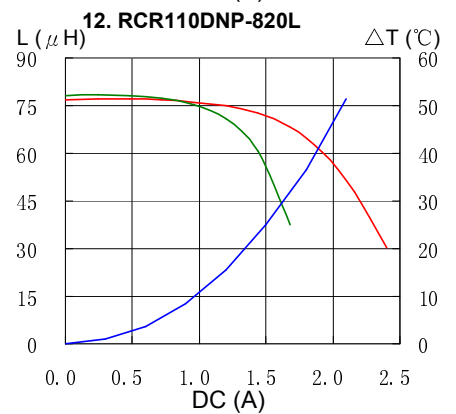
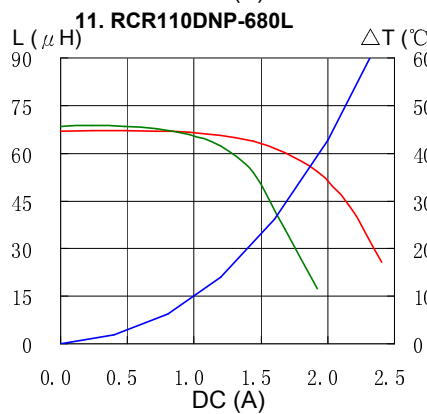
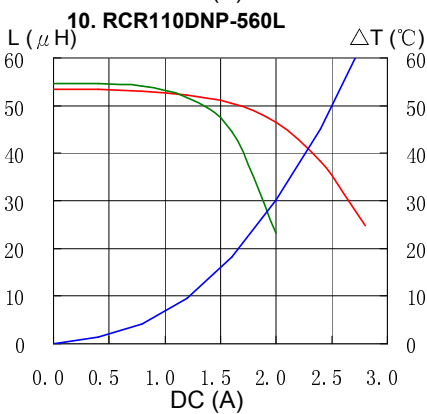
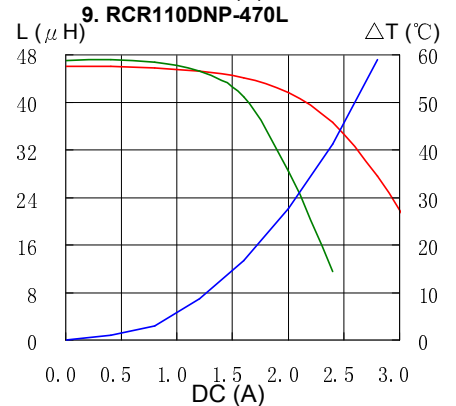
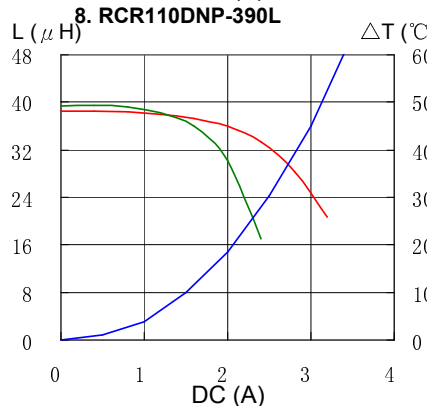
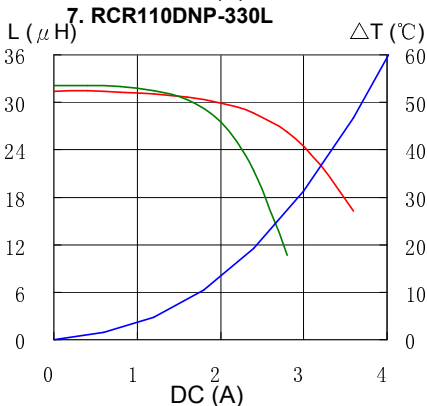
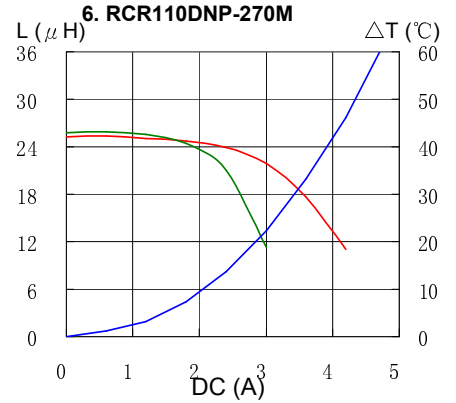
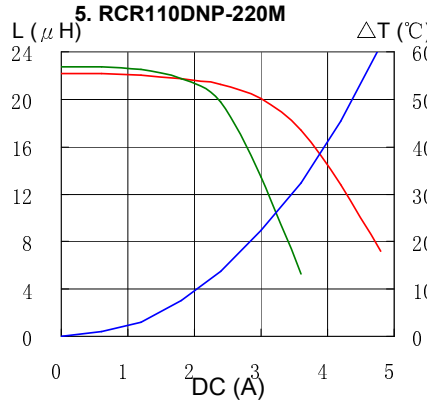
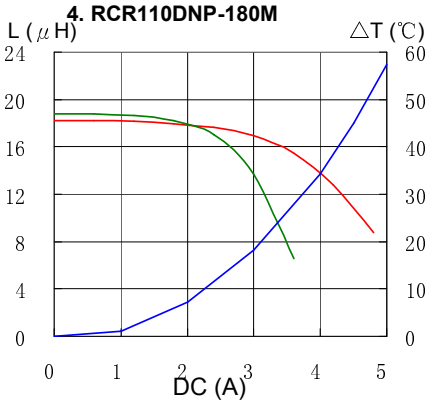
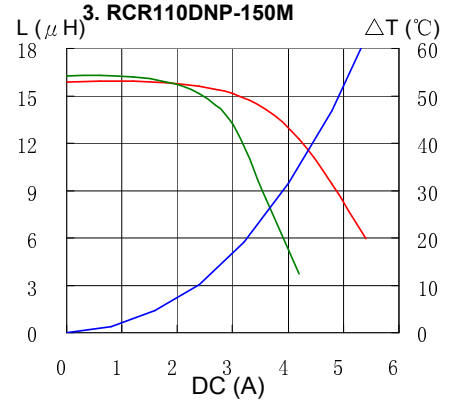
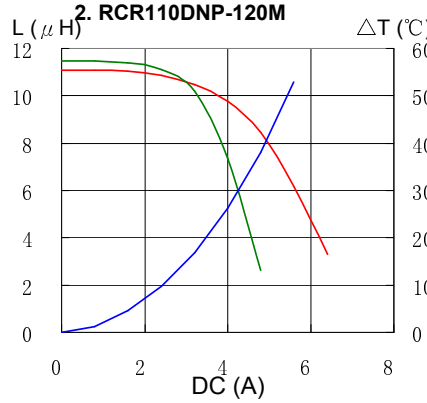
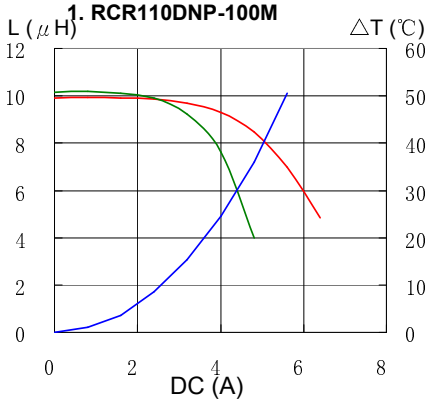


PIN Power Inductor RCR-110D



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

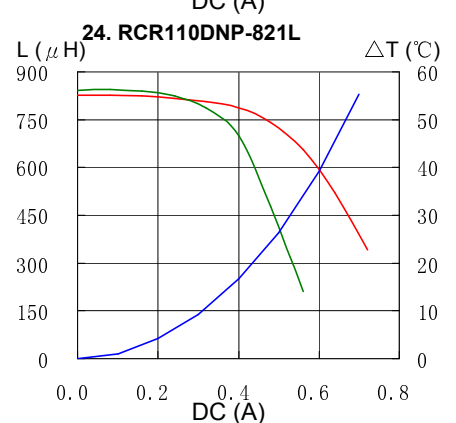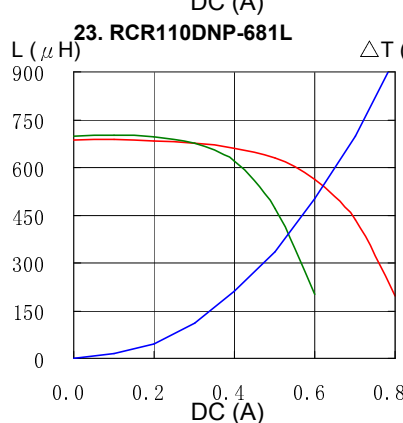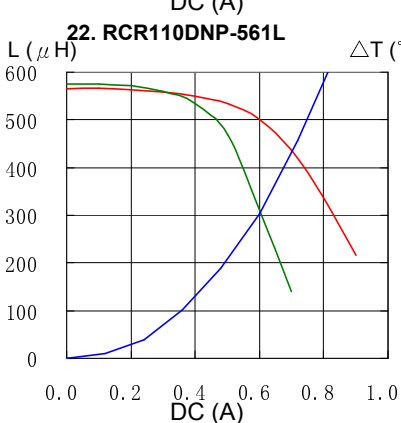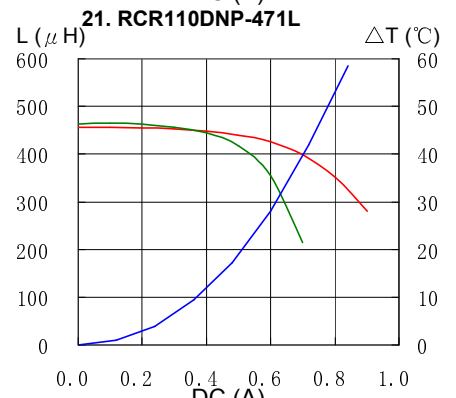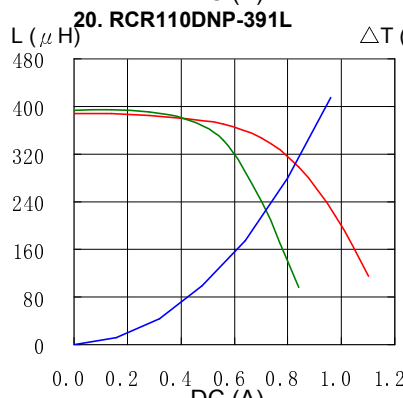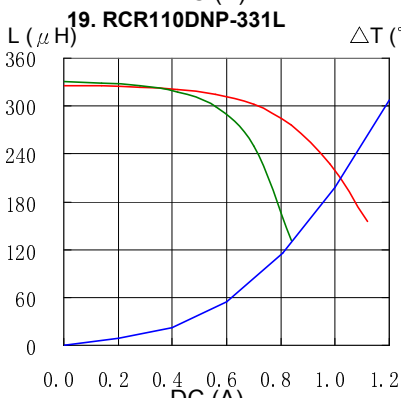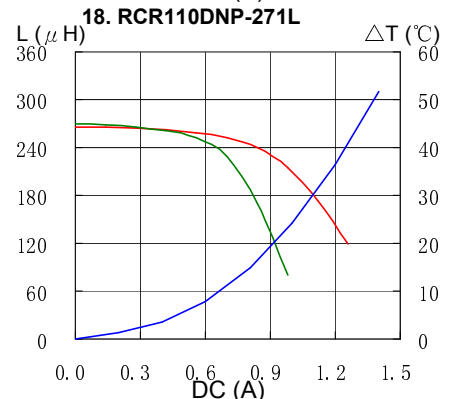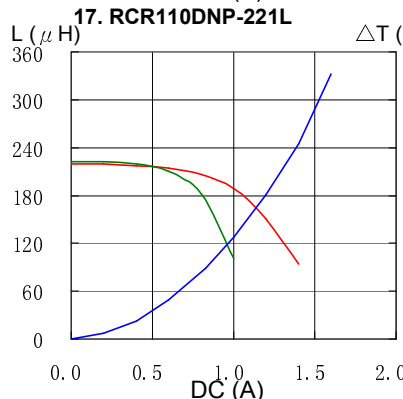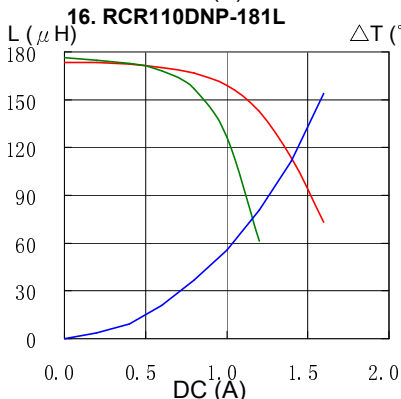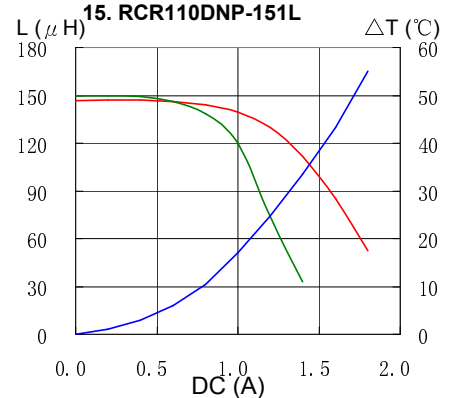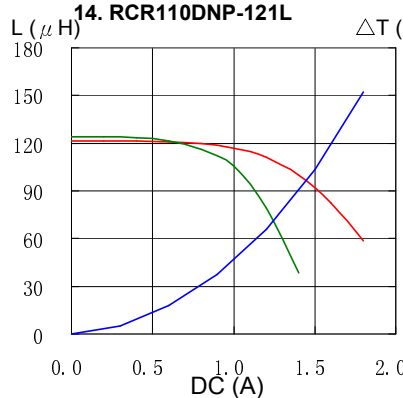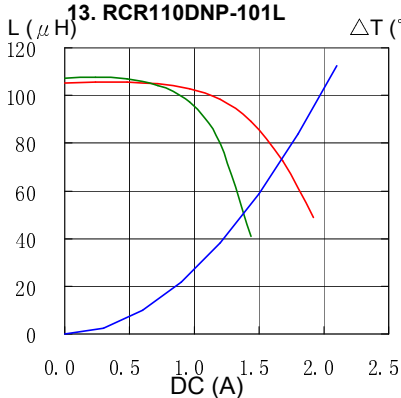


PIN Power Inductor RCR-110D



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

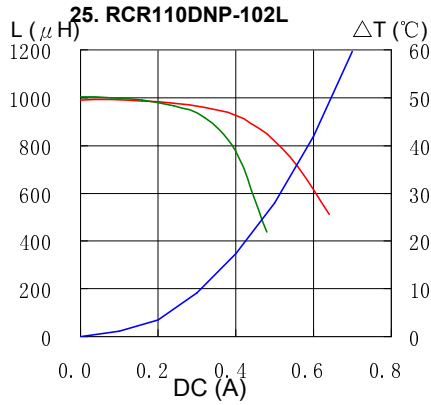

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)