


Aluminum Electrolytic Type / Radial Lead Type

RoHS compliance

# ME-UZ·SZ Series

5mm Height, Wide Temperature  
7mm Height, Wide Temperature




- ME-UZ : 105°C, 1,000hours, Solvent proof (within 2 minutes)
- ME-SZ : 105°C, 1,000hours, Solvent proof (within 3 minutes)

## Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-55 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tanδ)	tanδ (max) 120Hz/20°C	0.24	0.20	0.16	0.14	0.12	0.10	
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3						
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z <sub>20°C</sub>	3	2	2	2	2	2
		-55°C Z/Z <sub>20°C</sub>	5	4	4	3	3	3
Endurance	105°C, 1,000hours rated voltage applied (With the rated ripple current)	ΔC/C	Within ±25% of the initial value					
		tan δ	Less than 200% of the specified value					
		LC	Less than the specified value					

## Dimensions

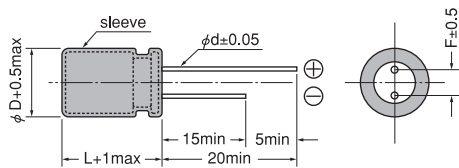

(Unit : mm)

φD	4	5	6.3
F	1.5	2.0	2.5
φd	0.45	0.45	0.45

## Size, Impedance, Rated Ripple Current

### ME-UZ series

μF \ V	6.3	10	16	25	35	50
10						6.3×5 2.0 70
22				6.3×5 1.6 100	6.3×5 2.0 70	6.3×5 2.0 70
33			6.3×5 1.6 100	6.3×5 1.6 100	6.3×5 2.0 70	
47		6.3×5 1.6 100	6.3×5 1.6 100	6.3×5 1.6 100	6.3×5 2.0 70	
100	6.3×5 1.6 100	6.3×5 1.6 100	6.3×5 1.6 100			
220	6.3×5 1.6 100					

### ME-SZ series

μF \ V	6.3	10	16	25	35	50
1.0						4×7 10 30
2.2						4×7 7.8 35
3.3						4×7 6.2 40
4.7						5×7 3.1 70
10			4×7 4.2 50	5×7 2.0 85	5×7 3.1 70	6.3×7 1.6 100
22	4×7 4.2 50	5×7 2.0 85	5×7 2.0 85	6.3×7 1.2 120	6.3×7 1.6 100	6.3×7 1.6 100
33	5×7 2.0 85	5×7 2.0 85	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.6 100	6.3×7 1.6 100
47	5×7 2.0 85	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.6 100	6.3×7 1.6 100
100	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.6 100	
220	6.3×7 1.2 120	6.3×7 1.2 120	6.3×7 1.2 120			
330	6.3×7 1.2 120					



Please refer to page 15 for ripple current frequency coefficients.

Rated ripple current  
mA rms (100kHz, 105°C)

Impedance(Ω)  
max at 100kHz, 20°C

Case size: φD×L (mm)

## Part number



Radial Lead Type  
Aluminum Electrolytic Capacitors

- CE-BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FSS
- CE-FS
- CE-FH
- CE-LH
- CE-AX
- CE-KX
- CE-GA
- CE-LS
- CE-ZX
- CE-ZC
- CE-LX
- CE-LL
- CE-LH(High Voltage)
- CE-PC
- CE-PH
- CE-PS
- CE-PF
- CE-TH
- CE-JX
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-SWG
- ME-HC
- ME-LS
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-FH
- ME-PX
- ME-HPC·HPD
- ME-FC·FD
- ME-SWN
- ME-HWN

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [SUN](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)  
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)  
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)  
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)