


Aluminum Electrolytic Type / Radial Lead Type

RoHS compliance

ME-UAX·SAX Series

Low Impedance

5mm Height(UAX), 7mm Height(SAX)




- ME-UAX : 105°C, 1,000hours, Solvent proof (within 2 minutes)
- ME-SAX : 105°C, 1,000hours, Solvent proof (within 3 minutes)

Specifications

Items	Condition	Specifications					
Rated voltage (V)	—	6.3	10	16	25	35	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	
Category temperature range (°C)	—	-55 to +105					
Capacitance tolerance (%)	120Hz/20°C	M : ±20					
Dissipation Factor (tan δ)	tan δ (max) 120Hz/20°C	0.24	0.20	0.16	0.14	0.12	
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3					
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z _{20°C}	3	2	2	2	2
		-55°C Z/Z _{20°C}	5	4	4	3	3
Endurance	105°C, 1,000hours rated voltage applied (With the rated ripple current)	ΔC/C	Within ±25% of the initial value				
		tan δ	Less than 200% of the specified value				
		LC	Less than the specified value				

Dimensions

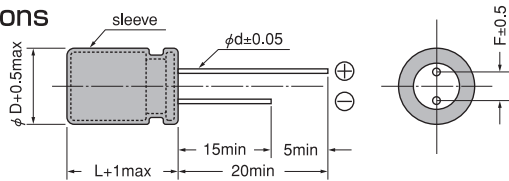

(Unit : mm)

φD	4	5	6.3
F	1.5	2.0	2.5
φd	0.45	0.45	0.45

Size, Impedance, Rated Ripple Current

ME-UAX series

μF	6.3			10			16			25			35		
	V														
33									6.3x5	0.44	230	6.3x5	0.44	230	
47							6.3x5	0.44	230	6.3x5	0.44	230	6.3x5	0.44	230
56									6.3x5	0.44	230				
68				6.3x5	0.44	230	6.3x5	0.44	230						
100	6.3x5	0.44	230				6.3x5	0.44	230						
150	6.3x5	0.44	230												
220	6.3x5	0.44	230												

ME-SAX series

μF	6.3			10			16			25			35		
	V														
4.7												4x7	1.15	90	
10									4x7	1.15	90	5x7	0.49	160	
15							4x7	1.15	90	5x7	0.49	160	6.3x7	0.29	280
22				4x7	1.15	90	5x7	0.49	160	5x7	0.49	160	6.3x7	0.29	280
33				5x7	0.49	160	5x7	0.49	160	6.3x7	0.24	280	6.3x7	0.29	280
47	5x7	0.49	160	5x7	0.49	160	6.3x7	0.24	280	6.3x7	0.24	280	6.3x7	0.29	280
68										6.3x7	0.24	280			
100				6.3x7	0.24	280	6.3x7	0.24	280	6.3x7	0.29	280			
150				6.3x7	0.24	280	6.3x7	0.29	280						
220	6.3x7	0.24	280	6.3x7	0.29	280	6.3x7	0.29	280						
330	6.3x7	0.29	280												



Please refer to page 15 for ripple current frequency coefficients.

Rated ripple current
mArms(100kHz, 105°C)

Impedance(Ω)
max at 100kHz, 20°C

Case size: φDxL(mm)

Part number



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [SUN](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#)
[VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)