

Aluminum Electrolytic Type / Surface Mount Type

RoHS compliance

# CE-LL Series

Low Impedance

Long Life




- 105°C, 7,000 to 10,000hours
- Solvent proof (within 2 minutes)



## Specifications

Items	Condition	Specifications					
Rated voltage (V)	—	6.3	10	16	25	35	50
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63
Category temperature range (°C)	—	-25 to +105					
Capacitance tolerance (%)	120Hz/20°C	M : ±20					
Dissipation Factor (tan δ)	tan δ (max) 120Hz/20°C	0.32	0.28	0.26	0.16	0.14	0.14
Leakage current (LC)	μA/after 2minutes (max)	The greater value of either 0.01CV or 3					
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-25°C	Z/Z20°C	4	3	2	2
Endurance	105°C, rated voltage applied (With the rated ripple current)	Test	φD ≤ 6.3 : 7,000hours, φD ≥ 8 : 10,000hours				
		ΔC/C	Within ±30% of the initial value				
		tan δ	Less than 300% of the specified value				
		LC	Less than the specified value				

## Marking, Dimensions

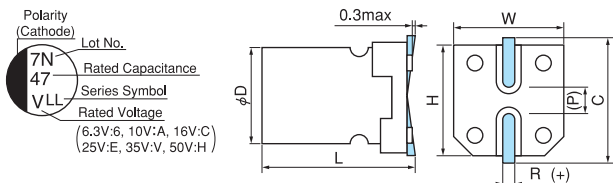

A pressure relief vent is provided for φD=8 or bigger

(P)reference size

(Unit : mm)

D <sup>+0.5max</sup>	L <sup>±0.3</sup>	W <sup>±0.2</sup>	H <sup>±0.2</sup>	C <sup>±0.2</sup>	R	P
5	7.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	7.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	8.4	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	10.2	10.3	10.3	11.0	1.0 to 1.4	4.6

## Size, Impedance, Rated Ripple Current

μF \ V	6.3		10		16		25		35		50			
10									5×7.0	2.2	95			
22					5×7.0	2.2	95	5×7.0	2.2	95	6.3×8.4	1.8	100	
33			5×7.0	2.2	95			6.3×7.0	1.1	140	6.3×8.4	1.0	230	
47	5×7.0	2.2	95			6.3×7.0	1.1	140	6.3×7.0	1.1	140	6.3×8.4	1.0	230
100	6.3×7.0	1.1	140			6.3×7.0	1.1	140	6.3×8.4	1.0	230	8×10.2	0.22	600
150			6.3×7.0	1.1	140	6.3×8.4	1.0	230	8×10.2	0.22	600			
220	6.3×8.4	1.0	230			6.3×8.4	1.0	230	8×10.2	0.22	600	10×10.2	0.16	850
330	6.3×8.4	1.0	230			8×10.2	0.22	600	10×10.2	0.16	850			
470	8×10.2	0.22	600			10×10.2	0.16	850						
1000	10×10.2	0.16	850											


Please refer to page 15 for ripple current frequency coefficients.

Case size: φDxL(mm)

Rated ripple current  
mA Arms (100kHz, 105°C)

Impedance(Ω)  
max at 100kHz, 20°C

## Part number



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [SUN manufacturer](#):*

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)  
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)  
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)  
[AEA1010221M035R](#) [AEA1010470M080R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#)  
[AEA1213331M050R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#)  
[RVT1000UF10V34RV0081](#) [XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RVT100UF16V67RV0120](#)  
[XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#)  
[RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#)  
[RST100UF16V003](#) [XT100UF10V90RV0060](#)