


# ME-WX Series

Low Impedance  
High Ripple Current




- 105°C, 2,000 to 5,000hours
- Non solvent proof



## Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-40 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tanδ)	tanδ (max) 120Hz/20°C	0.22	0.19	0.16	0.14	0.12	0.10	
		Exceeding 1,000μF, +0.02 every 1,000μF						
Leakage current (LC)	μA/after 2minutes (max)	0.01CV						
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-25°C / Z/Z <sub>20°C</sub>	2	2	2	2	2	2
		-40°C / Z/Z <sub>20°C</sub>	3	3	3	3	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ5 to φ6.3 : 2,000hours, φ8 : 3,000hours, φ10 : 4,000hours, φ12.5 to φ16 : 5,000hours					
		ΔC/C	Within ±25% of the initial value					
		tan δ	Less than 200% of the specified value					
		LC	Less than the specified value					

## Dimensions

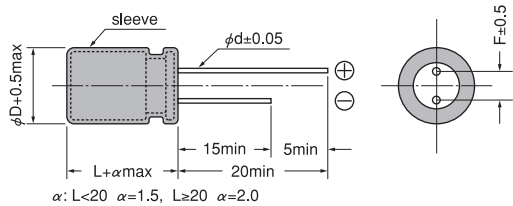

(Unit : mm)

φD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6★	0.8

★φ12.5×30:φd=0.8

α: L<20 α=1.5, L≥20 α=2.0  
A pressure relief vent is provided for φD=6.3 or bigger

## Size, Impedance, Rated Ripple Current

V Items Case size φDxL(mm)	6.3			10		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
ME-LS 5×11	150	0.30	250	100	0.30	250
ME-CZ 6.3×11	330	0.13	405	220	0.13	405
ME-CA 8×11.5	560	0.072	760	470	0.072	760
ME-CX 8×15	820	0.056	995	★1 680	0.056	995
ME-WX 8×20	★1 1200	0.041	1250	★1 1000	0.041	1250
ME-WA 10×12.5	1000	0.053	1030	680	0.053	1030
ME-WL 10×16	1200	0.038	1430	1000	0.038	1430
ME-WG 10×20	1500	0.023	1820	1200	0.023	1820
ME-FX 10×20	2200	0.023	1820	1500	0.023	1820
ME-PX 10×23	★3 2200	0.022	2150	★3 1500	0.022	2150
ME-HPD 12.5×20	3300	0.021	2360	2200	0.021	2360
ME-FC·FD 12.5×25	3900	0.018	2770	3300	0.018	2770
ME-SWN 12.5×30	4700	0.016	3290	3900	0.016	3290
ME-HWN 16×21	5600	0.018	3140	★2 3900	0.018	3140
16×25	6800	0.016	3460	5600	0.016	3460

■ Size, Impedance, Rated Ripple Current

V Items Case size φDxL(mm)	16			25		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
5x11	56	0.30	250	47	0.30	250
6.3x11	120	0.13	405	100	0.13	405
8x11.5	330	0.072	760	220	0.072	760
8x15	★1 470	0.056	995	330	0.056	995
8x20	★1 680	0.041	1250	★1 470	0.041	1250
10x12.5	470	0.053	1030	★2 330	0.053	1030
10x16	680	0.038	1430	470	0.038	1430
10x20	1000	0.023	1820	680	0.023	1820
10x20	1200	0.023	1820	820	0.023	1820
10x23	★3 1200	0.022	2150	★3 820	0.022	2150
12.5x20	1500	0.021	2360	1000	0.021	2360
12.5x25	2200	0.018	2770	1500	0.018	2770
12.5x30	2700	0.016	3290	1800	0.016	3290
16x21	★2 2700	0.018	3140	★2 1800	0.018	3140
16x25	3900	0.016	3460	2700	0.016	3460

V Items Case size φDxL(mm)	35			50		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)
5x11	33	0.30	250	22	0.34	238
6.3x11	56	0.13	405	47	0.14	385
8x12.5	★3 150	0.072	760	100	0.074	724
8x15	220	0.056	995	120	0.061	950
8x20	★1 270	0.041	1250	180	0.046	1190
10x12.5	★2 220	0.053	1030	150	0.061	979
10x16	330	0.038	1430	220	0.042	1370
10x20	470	0.023	1820	270	0.030	1580
10x23	★3 560	0.022	2150	330	0.028	1870
12.5x20	680	0.021	2360	470	0.027	2050
12.5x25	1000	0.018	2770	560	0.023	2410
12.5x30	1200	0.016	3290	680	0.021	2860
16x21	★2 1200	0.018	3140	820	0.023	2730
16x25	1800	0.016	3460	1000	0.021	3010





Please refer to page 15 for ripple current frequency coefficients.

★1 WXL ★2 WXS ★3 WXV

Aluminum Electrolytic  
Capacitors  
Radial  
Lead Type

- CE-BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FSS
- CE-FS
- CE-FH
- CE-LH
- CE-AX
- CE-KX
- CE-GA
- CE-LS
- CE-ZX
- CE-ZC
- CE-LX
- CE-LL
- CE-LH(High Voltage)
- CE-PC
- CE-PH
- CE-PS
- CE-PF
- CE-TH
- CE-JX
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-SWG
- ME-HC
- ME-LS
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-FH
- ME-PX
- ME-HPC·HPD
- ME-FC·FD
- ME-SWN
- ME-HWN

■ Part number



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [SUN](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)  
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)  
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)  
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)