


# ME-CA Series

Low Impedance

Small




- 105°C, 1,000 to 3,000hours
- Solvent proof (within 5 minutes)



## Specifications

Items	Condition	Specifications						
Rated voltage (V)	—	6.3	10	16	25	35	50	
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	
Category temperature range (°C)	—	-55 to +105						
Capacitance tolerance (%)	120Hz/20°C	M : ±20						
Dissipation Factor (tanδ)	tanδ (max) 120Hz/20°C	0.28	0.24	0.20	0.16	0.14	0.12	
Leakage current (LC)	μA/after 2minutes (max)	Exceeding 1,000 μF, +0.02 every 1,000 μF						
Impedance ratio at low temperature	Based the value at 120Hz, +20°C	-40°C Z/Z <sub>20°C</sub>	3	3	2	2	2	2
		-55°C Z/Z <sub>20°C</sub>	6	5	4	4	3	3
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	φ5 to φ8 : 1,000hours, φ10 : 2,000hours, φ12.5 to φ16 : 3,000hours					
		ΔC/C	Within ±25% of the initial value					
		tan δ	Less than 200% of the specified value					
		LC	Less than the specified value					

## Dimensions

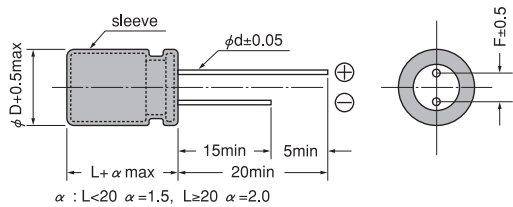

(Unit : mm)

	5	6.3	8	10	12.5	16
φD	2.0	2.5	3.5	5.0	5.0	7.5
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8

## Size, Impedance, Rated Ripple Current

Case size φD×L(mm)	Items V	6.3			10		
		Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Ωmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11	ME-CA	220	0.50	180			
6.3×11	ME-CX	330	0.30	280	220	0.30	280
6.3×11	ME-AX	470	0.24	280	330	0.24	280
8×11.5	ME-WA	1000	0.15	560	470	0.16	410
10×12.5	ME-WL				1000	0.086	710
10×16	ME-WG	2200	0.066	950			
10×20	ME-FX	3300	0.047	1150	2200	0.047	1150
12.5×20	ME-FH	4700	0.042	1460	3300	0.042	1460
12.5×25	ME-HPD	6800	0.031	1780	4700	0.031	1780
16×25	ME-FC·FD	10000	0.026	2000	6800	0.026	2000
16×31.5	ME-SWN				10000	0.022	2200
16×35.5	ME-HWN	15000	0.022	2200			


■ Size, Impedance, Rated Ripple Current

V Items Case size φDxL(mm)	16			25		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11	100	0.50	180			
6.3×11	220	0.24	280	100	0.30	280
8×11.5	330	0.16	410	220	0.16	410
8×11.5	470	0.15	560	330	0.15	560
10×12.5				470	0.086	710
10×16	1000	0.066	950			
10×20				1000	0.047	1150
12.5×20	2200	0.042	1460			
12.5×25	3300	0.035	1780	2200	0.035	1780
16×25	4700	0.026	2000	3300	0.026	2000
16×31.5	6800	0.022	2200	4700	0.022	2200

V Items Case size φDxL(mm)	35			50		
	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)	Capacitance (μF)	Impedance(Qmax) (20°C/100kHz)	Rated ripple current(mArms) (105°C/10k to 200kHz)
5×11				2.2	3.0	45
5×11				3.3	2.7	55
5×11				4.7	2.0	90
5×11				10	1.7	110
5×11	33	0.72	180	22	1.2	120
5×11	47	0.50	180	33	0.95	130
6.3×11	100	0.24	280	47	0.56	190
8×11.5	220	0.15	560	100	0.30	320
10×12.5	330	0.086	710	220	0.16	520
10×16	470	0.066	950	330	0.12	670
10×20				470	0.088	820
12.5×20	1000	0.042	1460			
12.5×25				1000	0.053	1200
16×25	2200	0.026	2000			
16×31.5				2200	0.029	1750
16×35.5	3300	0.022	2200			

Please refer to page 15 for ripple current frequency coefficients.

■ Part number



Aluminum Electrolytic  
Capacitors

Radial  
Lead Type

- CE-BE
- CE-BD
- CE-BS
- CE-BSS
- CE-FE
- CE-LD
- CE-FSS
- CE-FS
- CE-FH
- CE-LH
- CE-AX
- CE-KX
- CE-GA
- CE-LS
- CE-ZX
- CE-ZC
- CE-LX
- CE-LL
- CE-LH(High Voltage)
- CE-PC
- CE-PH
- CE-PS
- CE-PF
- CE-TH
- CE-JX
- CE-NP
- CE-FN
- ME-SWB
- ME-UZ·SZ
- ME-UAX·SAX
- ME-SWG
- ME-HC
- ME-LS
- ME-CZ
- ME-CA**
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-FH
- ME-PX
- ME-HPC·HPD
- ME-FC·FD
- ME-SWN
- ME-HWN

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [SUN](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)  
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)  
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)  
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)  
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)  
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)  
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)