

LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

CHARACTERISTICS

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Aluminium
- Shell Plating : Olive drab Cadmium
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +175°C
- Salt Spray : 500 hours
- Mass : 30.09 g ± 10%

| Connector dimension | |
|---------------------|-----------------|
| Dim | Nominal |
| A | 38.1±0.3 |
| B | 23.82+0.1/-0.15 |
| R | 32.5Max |
| S | 34.9±0.4 |
| W | 2.2+0.9/-0.1 |
| VV THREAD | M18x1-6g |

| PC Contact dimension | |
|----------------------|-------------|
| ØD | 0.7 Max |
| L1 | 7.24 / 9.00 |
| L2 | 8.5+0/-0.2 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR | Not Listed |

PN: 8D7L13W35SN


| | | | |
|--------------|------------|--------------------------|-------------------------|
| A | 07-11-2016 | First Release | |
| ISS | DATE | Latest modification - by | MOD N° |
| Designed By: | | Date: | CUSTOMER DRAWING |

| | | | |
|--------------|---------------------------------------|--|--|
| TITLE | Aluminium Receptacle 8D series | | |
|--------------|---------------------------------------|--|--|

| | | | |
|-------|--|--------------------------------|-----------------|
| SCALE | | General linear Tolerances: ±-- | NPRDS / PROJECT |
| NA | | | 859 |

| | | |
|----------------|------------------------|---|
| SOURIAU | WWW.SOURIAU.COM | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
|----------------|------------------------|---|

| | | | |
|-----------|-------------------------------------|--|------------|
| FORMAT | SOURIAU DRG N° 8D7L13W35SN-C | | SHEET |
| A3 | | | 1/2 |

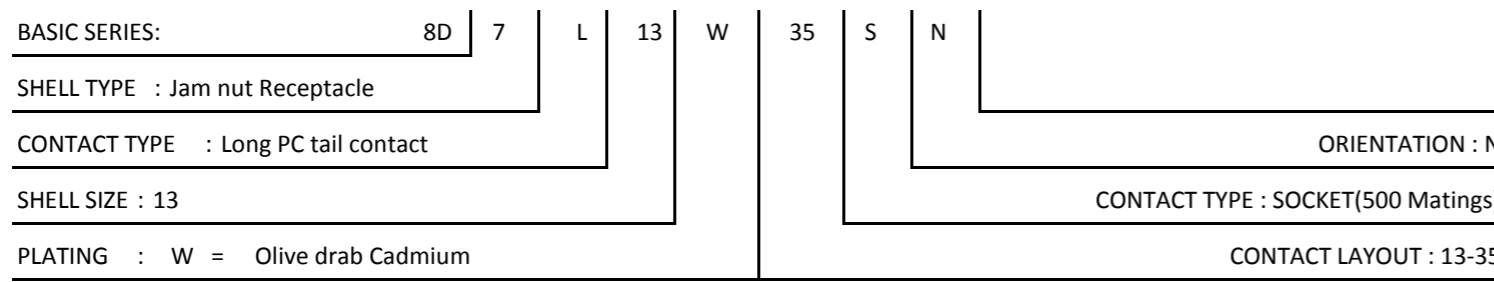

Contact Layout



| Contacts (Insert arrangement 13-35) | | | | | |
|-------------------------------------|-------------|-------------|---------------------|-------------|-------------|
| Contact position ID | Location | | Contact position ID | Location | |
| | X-axis (mm) | Y-axis (mm) | | X-axis (mm) | Y-axis (mm) |
| 1 | +045 (1.14) | +197 (5.00) | 12 | -182 (4.62) | +088 (2.24) |
| 2 | +126 (3.20) | +158 (4.01) | 13 | -126 (3.20) | +158 (4.01) |
| 3 | +182 (4.62) | +088 (2.24) | 14 | -045 (1.14) | +197 (5.00) |
| 4 | +203 (5.16) | +000 (0.00) | 15 | +045 (1.14) | +107 (2.72) |
| 5 | +182 (4.62) | -088 (2.24) | 16 | +117 (2.97) | +026 (0.66) |
| 6 | +126 (3.20) | -158 (4.01) | 17 | +093 (2.36) | -075 (1.91) |
| 7 | +045 (1.14) | -197 (5.00) | 18 | +000 (0.00) | -120 (3.05) |
| 8 | -045 (1.14) | -197 (5.00) | 19 | -093 (2.36) | -075 (1.91) |
| 9 | -126 (3.20) | -158 (4.01) | 20 | -117 (2.97) | +026 (0.66) |
| 10 | -182 (4.62) | -088 (2.24) | 21 | -045 (1.14) | +107 (2.72) |
| 11 | -203 (5.16) | +000 (0.00) | 22 | +000 (0.00) | -030 (0.76) |

| (Applicable to MIL-DTL-38999 only) | | | | | | |
|------------------------------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
| 13 | -35 | 22 | 22D | M | All | MS27527-35 |

| DIAMETER FOR PCB DRILLING | |
|---------------------------|----------|
| Contact Type | Diameter |
| Contact Size 22 | Ø1 Min |

Panel cutout

JAM NUT RECEPTACLE (TYPE 7)



Max. thickness panel for receptacle: Type 7: 3.2 mm

| Dim | Nominal |
|-----|---------------|
| B | 24.26+0/-0.25 |
| ØC | 25.65+0.25/-0 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR | Not Listed |

PN: 8D7L13W35SN

| | | | |
|----------------|-------------------------------------|----------------------------|---|
| A | 07-11-2016 | First Release | |
| ISS | DATE | Latest modification - by | MOD N° |
| Designed By: | | Date: | CUSTOMER DRAWING |
| TITLE | Aluminium Receptacle 8D series | | |
| SCALE | | General linear Tolerances: | NPRDS / PROJECT |
| NA | | ±-- | 859 |
| SOURIAU | WWW.SOURIAU.COM | | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT | SOURIAU DRG N° 8D7L13W35SN-C | | SHEET 2/2 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Sunbank](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6104-215-0902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102C18-4P-472](#) [CS3106A-10SL-53S](#) [CS3106A-10SL-64S](#)