


B.2: Valide

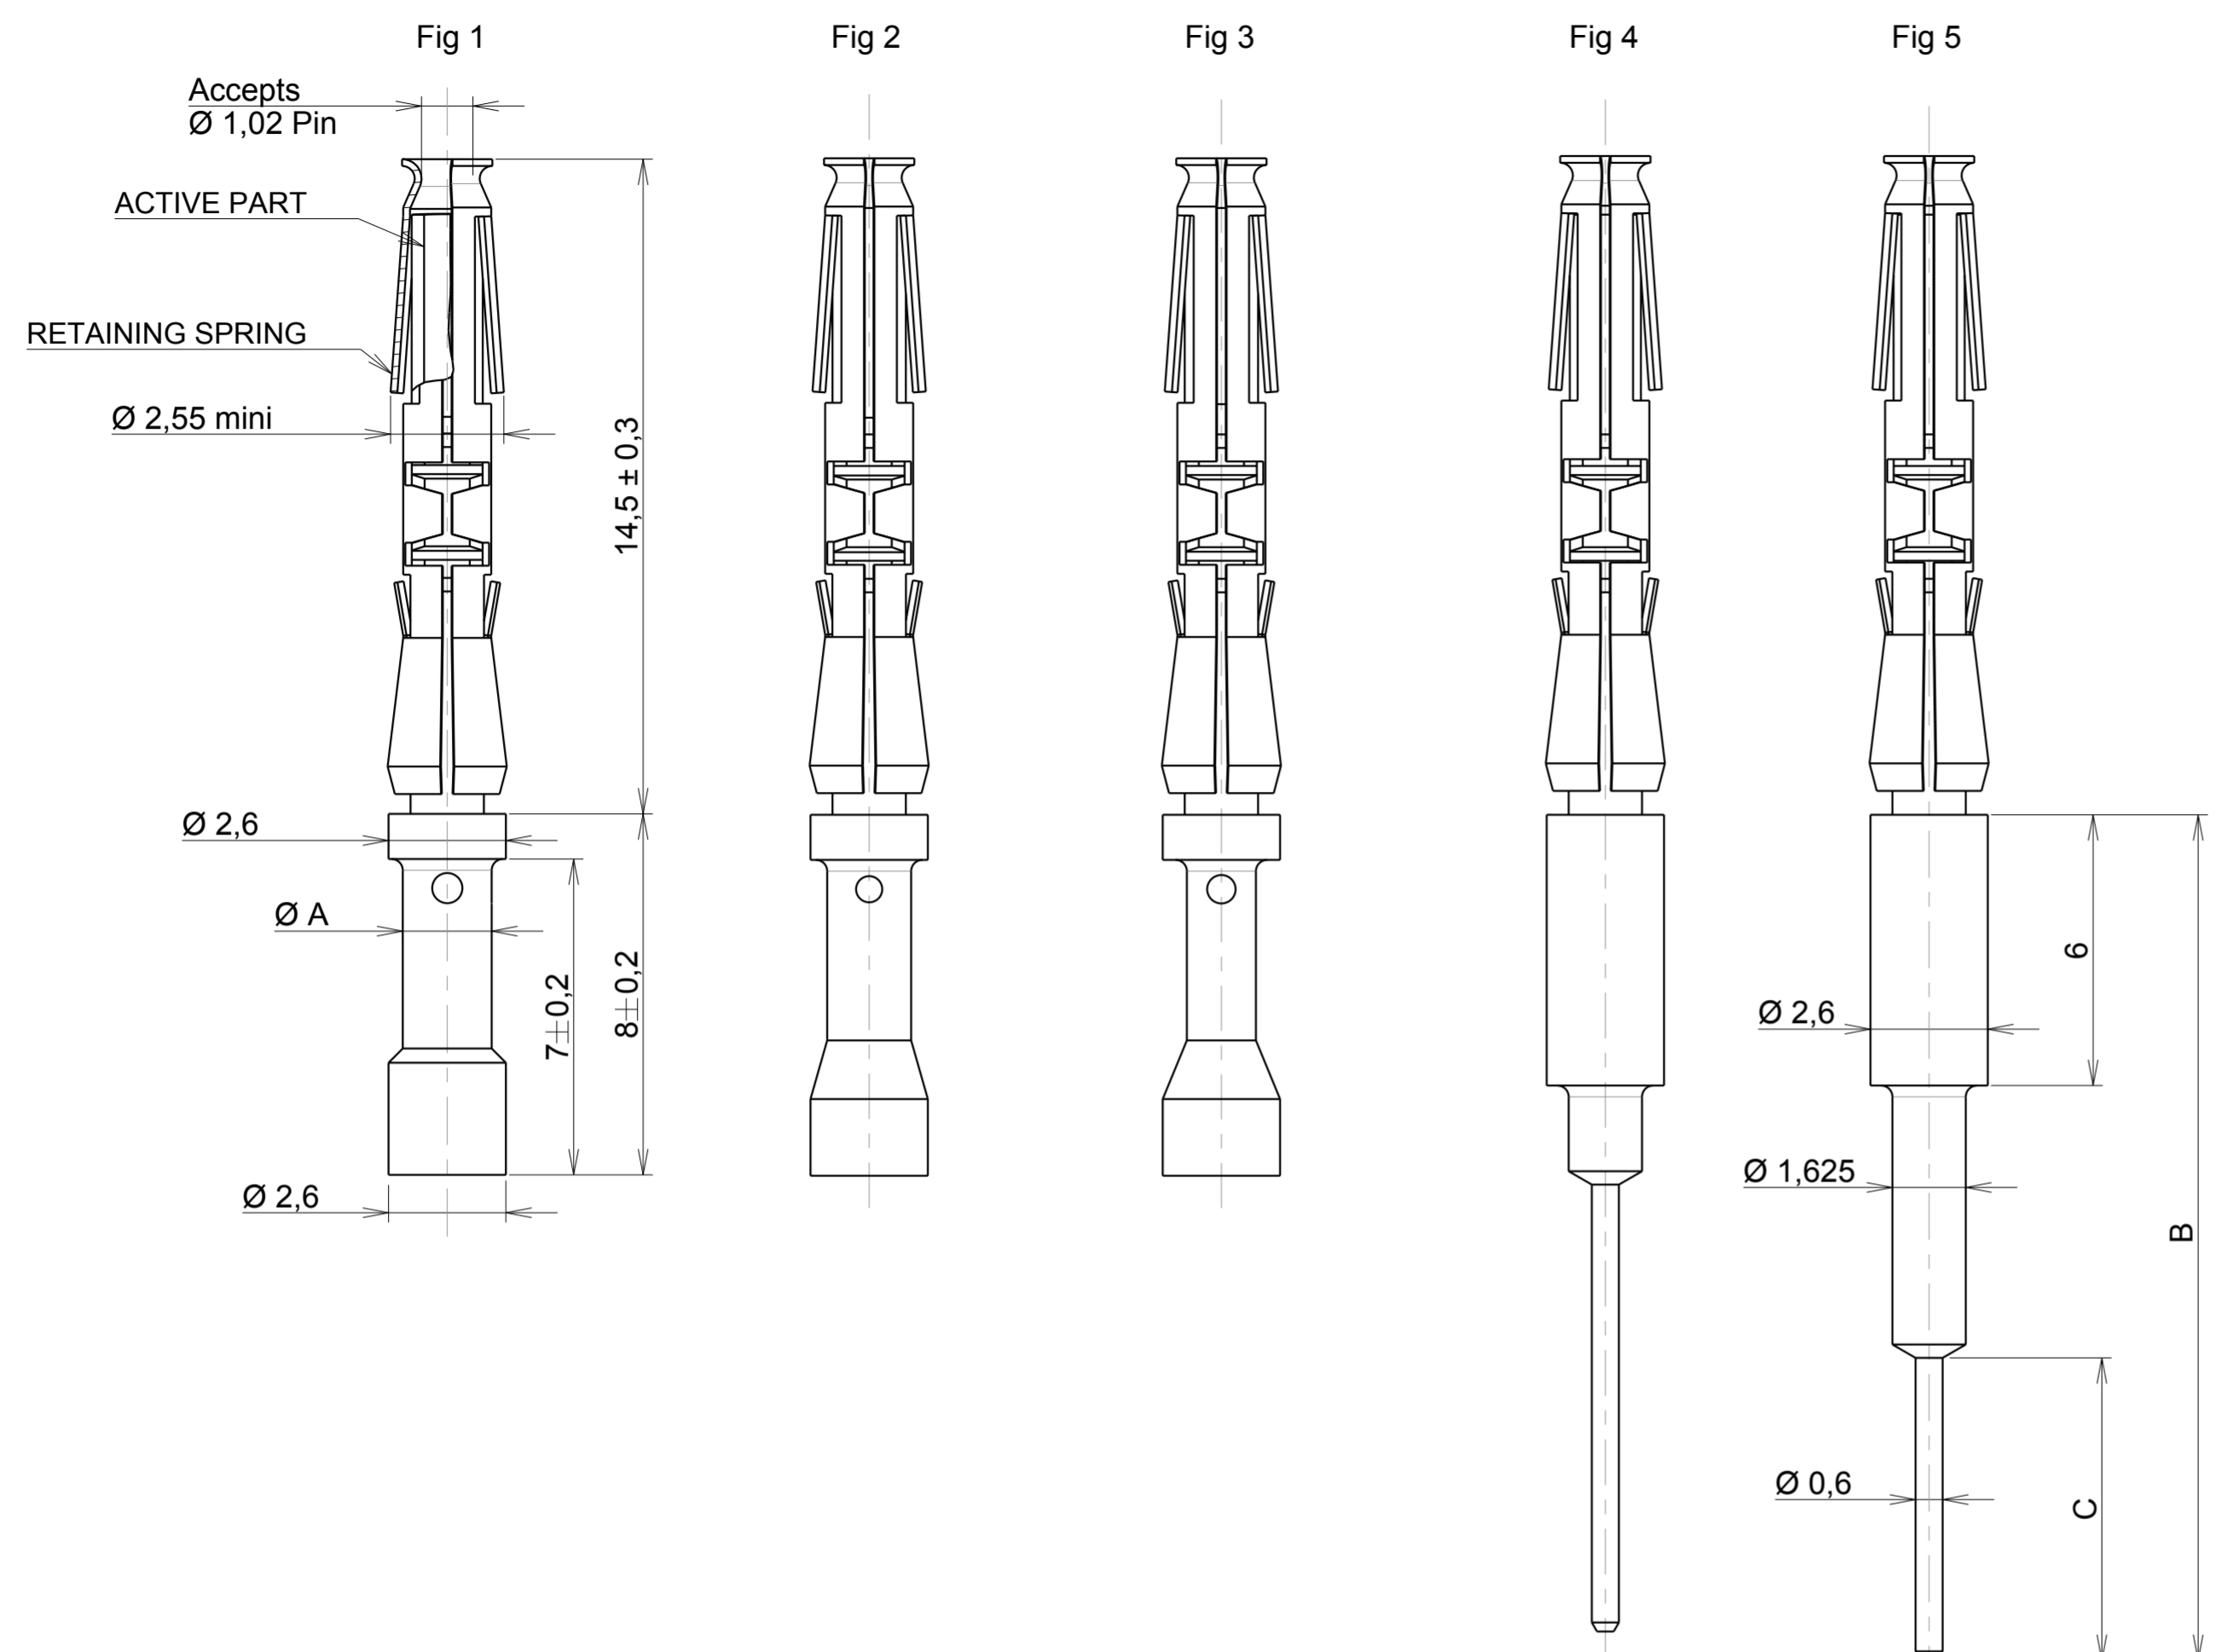

Notes :

- Machined contact
- Extraction tool : RX20D44

Material :

- Contact body:high conductive copper alloy
- :plating : 0.4 micron gold over nickel on active part
- Retaining spring:stainless steel

Performance Characteristics :

- Contact retention in the body:50N max
- Contact insertion force:5N max
- Contact separation force:0.30N min
- Current rating:7.5 Amps
- Contact resistance:6mΩ max
- Dielectric withstanding voltage:1500 Vrms min
- For RCXXW3K : Wire strip lenght : 4,8 mm

Part Number	Fig.	Insulation Diameter (mm)	WIRE SIZE		Ø A	HAND CRIMP TOOLING			B	C
			AWG	MM ²		SHANDLES	MH860			
						Tool Head	Locator	Selector		
RC18W3K	1	Ø 1,20 - 2,10	20 -18	0,50 - 0,82	Ø 1,97	S20RCM	MH86301	6 / 8	/	/
RC20W3K	2	Ø 1,20 - 1,60	22 - 20	0,32 - 0,50	Ø 1,86			5 / 7	/	/
RC24W3K	3	Ø 0,90 - 1,60	26 - 24	0,12 - 0,25	Ø 1,53			5 / 6	/	/
RCW50A7K	4	/	/	/	/	/	/	/	18,1	9,90
RCW5016K	5	/	/	/	/	/	/	/	18,74	6,70

P/N : SEE TABLE

B	18/07/2018	Correct mistakes : separation force: 2N replace by 0.30N min	25144
ISS	DATE	Latest modification - by:	ROUILLARD Ch MOD N°
Designed by:		CHARLOT MA Date: 14/09/12	CUSTOMER DRAWING
TITLE		SPILL AND CRIMP SOCKET CONTACT AWG 20 CONNECTOR UTOW	
Scale		Dimensions in mm General linear Tolerances: ± --	NPRDS / PROJECT RC
7/1		This document is the property of SOURIAU It must not be reproduced or communicated without permission	
FORMAT		SOURIAU DRG N° RCXWXC-C	
A2	SHEET		1 / 1

Country	Jurisdiction & Control List
FR	NOT LISTED

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Contacts](#) category:

Click to view products by [Sunbank](#) manufacturer:

Other Similar products are found below :

[RC16M23J](#) [133780-1](#) [RM20M13D28](#) [RM24M9D28](#) [RMMX110-1D28](#) [ELFH02211](#) [ELVP16100E](#) [164-901-CD](#) [BACS16X1A](#)
[EN3545007SCE](#) [BV002BSQ20049CZ](#) [BV002SSQ160404CZ](#) [1900ND05S1B00B](#) [SJS862201](#) [166566-1](#) [1900ND04S1X00D](#) [ST-JL05-16S-](#)
[C3-100](#) [ST-JL05-20S-C1-100](#) [ST-JL05-20S-C2-100](#) [T01-CRIMP-S03](#) [APK-SA16A07-002](#) [27963-15T12](#) [CONT-JL05-08S-C2-10](#) [CONT-](#)
[JL05-12S-C1-10](#) [RC16M-23T](#) [RFD26L-1D28](#) [BV002ASJ16049CW](#) [33505815019](#) [JN1-22-20S-R-PKG100](#) [031-50213](#) [031-50794](#)
[ELFH08251](#) [ELFP0641GE](#) [SJS861301M](#) [ST-JL05-16S-C1-100](#) [ST-JL05-20P-C1-100](#) [82911466K](#) [82911467NK](#) [ESLM03200](#) [192991-0087](#)
[192900-0570](#) [ELFH07251](#) [M12883/40-07S](#) [T3P16FC3LZ](#) [ST-JL05-16S-C2-3500](#) [ZP-4016-10NF](#) [CONT-JL05-12P-C1-10](#) [RM20M12G8D28](#)
[031-50676](#) [12115010110](#)