


# FEMALE NON CRIMP CONTACTS

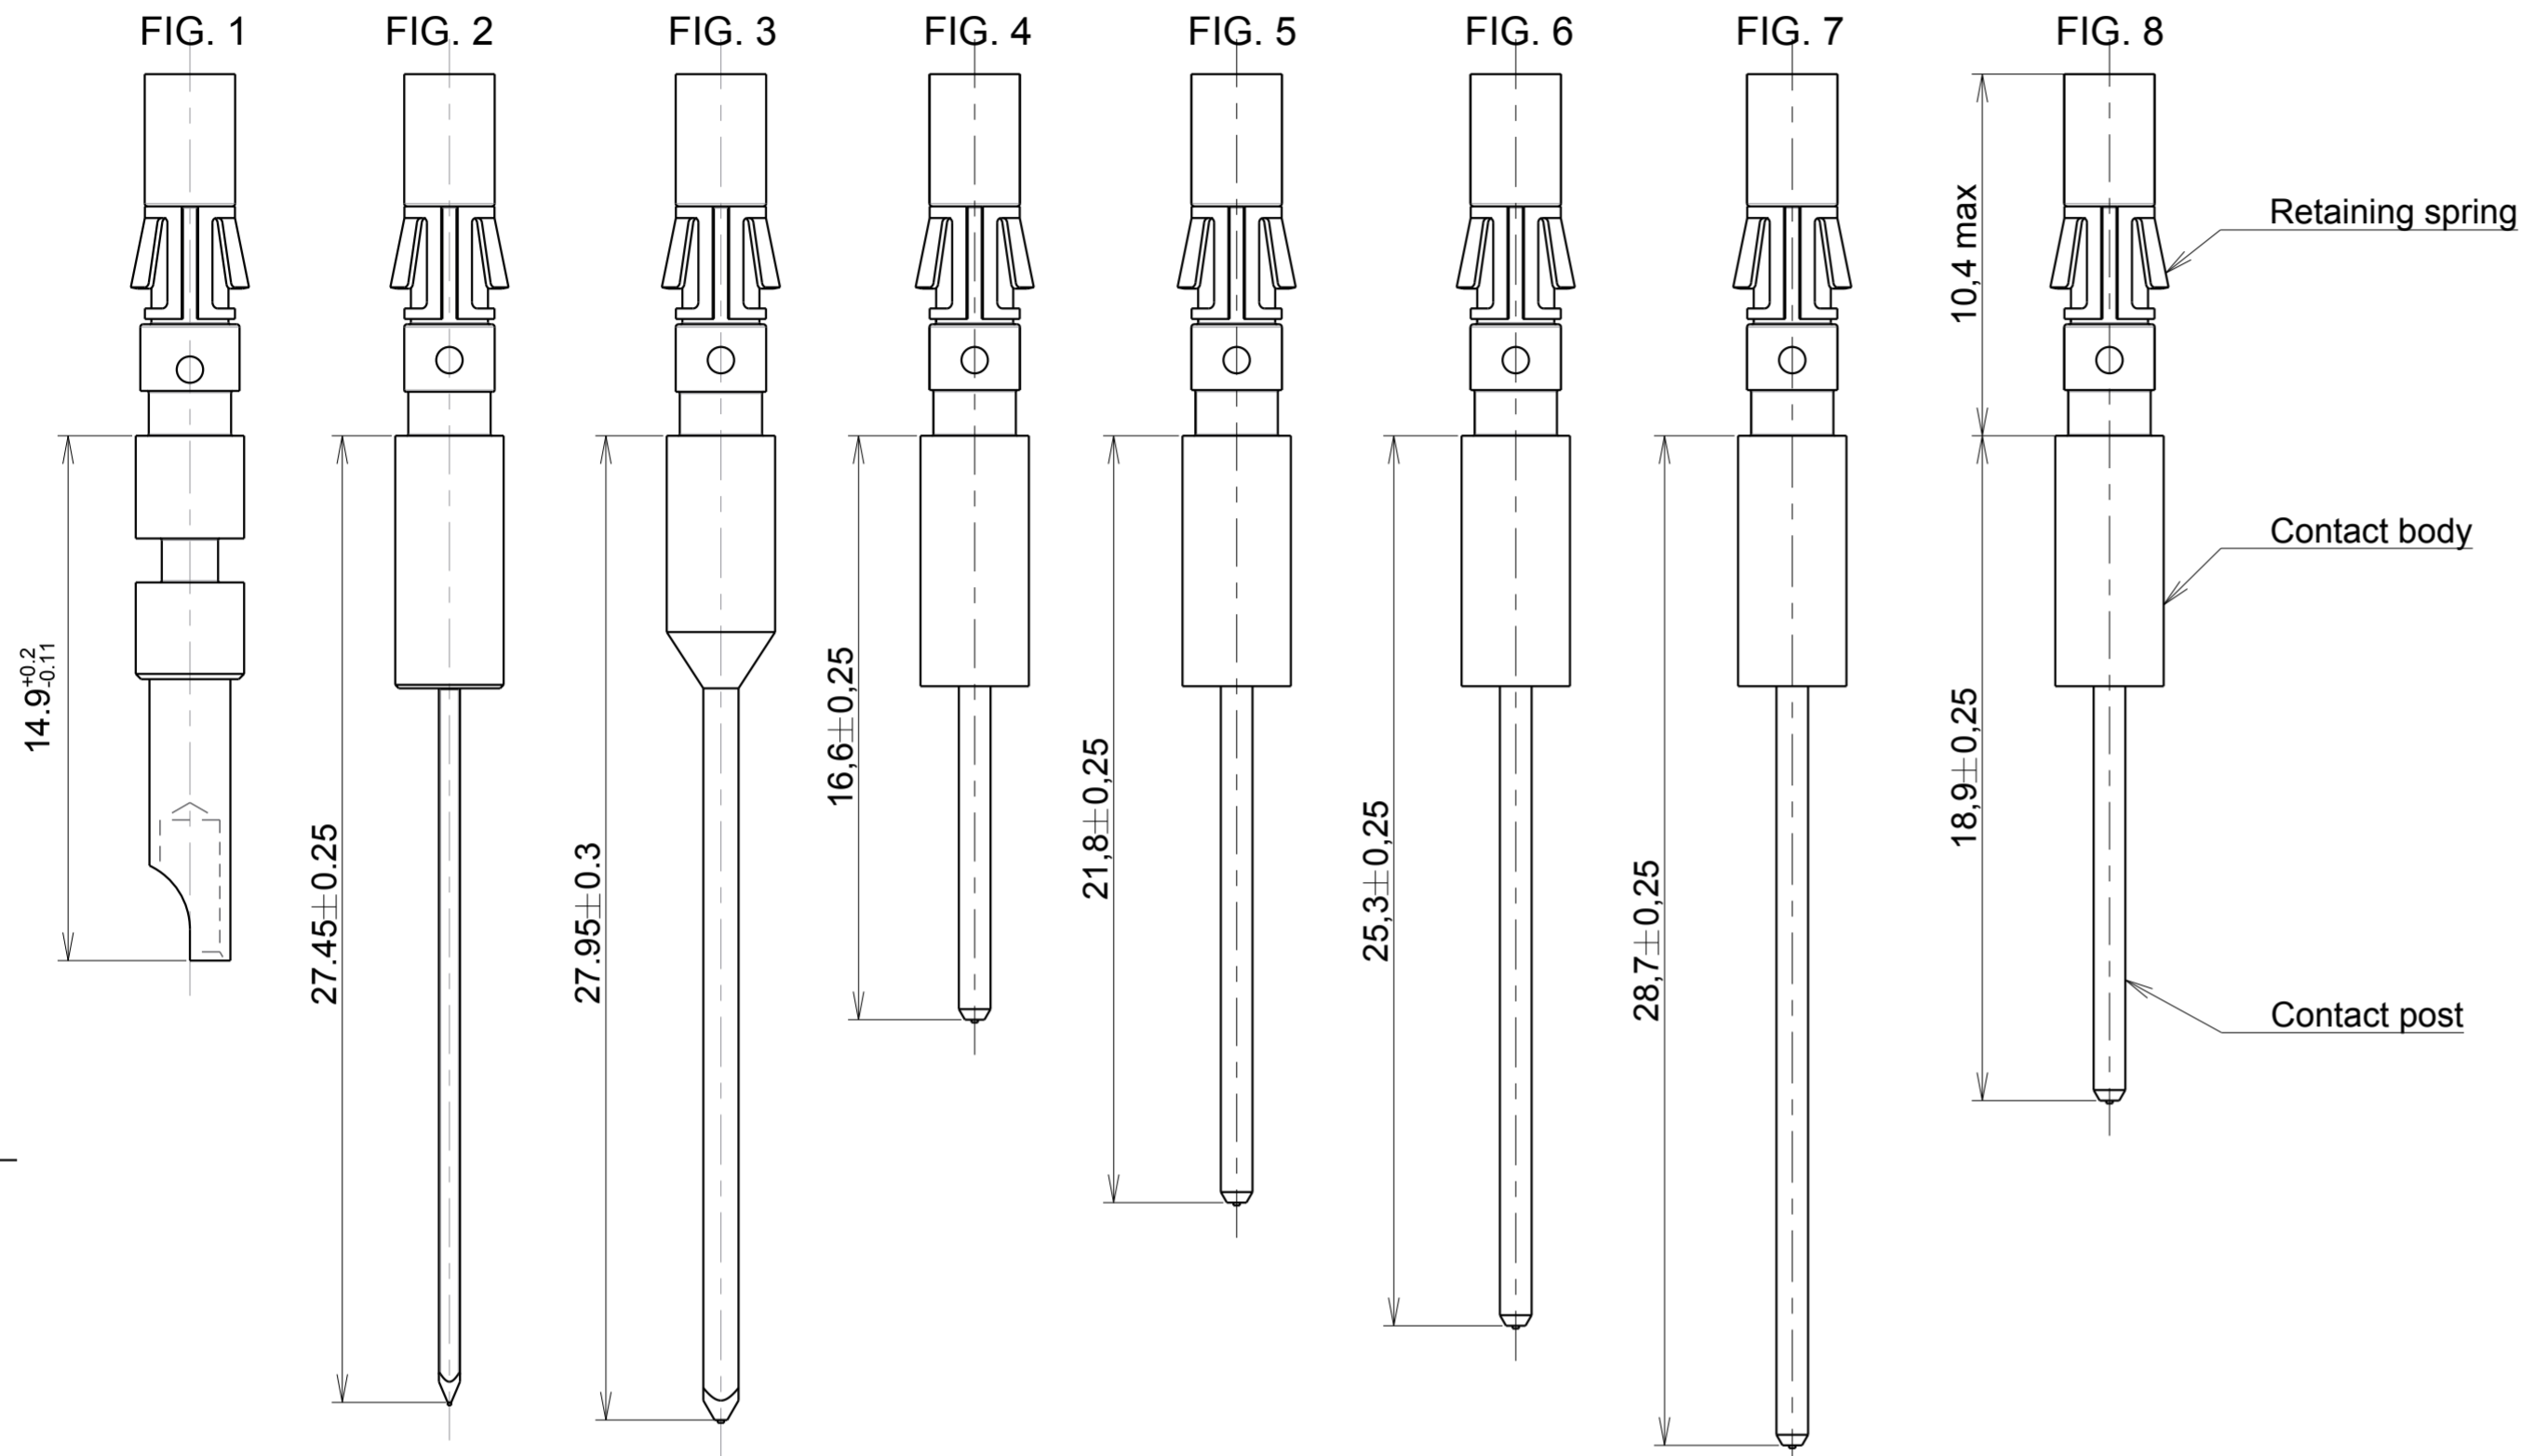

## PERFORMANCE CHARACTERISTICS :

Current rating : 13 Amp  
 Contact resistance : 3m Ohm  
 Operating voltage : 750 V RMS  
 Contact retention in body : 110 N Mini.  
 Individual insertion force : 3,5 N  
 Individual withdrawal force : 0,55 N mini

## MATERIAL

Contact body : Brass  
 \* Plating : J-K-N-L-M-D70-D28 = Gold Flash over Nickel  
 T = 3 - 5µ Tin over Nickel  
 Retaining spring : Beryllium copper not plated  
 Inner contact spring : Beryllium copper  
 \* Plating : J = Gold Flash over Nickel  
 K = 0,4µ Gold over Nickel  
 N = 0,75µ Gold over Nickel  
 L = 1,10µ Gold over Nickel  
 M = 1,75µ Gold over Nickel  
 T = 3 - 5µ Tin over Nickel  
 D70 = Gold flash over Nickel  
 D28 = 0,75µ Gold over Nickel

## NOTES

- 1/ Contacts suitable for : SMS - MSG - MB - MBG  
MSM - UTO - UTS - UTG - UTP
- 2/ Packaging : RC---M--\* : 50 pcs Bulk packaging  
RC--M---\*1000 : 1000 pcs Bulk packaging
- 3/ Marking : No colour marking
- 4/ Female contact accept Dia. 1,6 mm male contacts
- 5/ To know the length of the dip solder or wrap pin on the connectors:  
see customer drawing of the concerned connector.

## FEMALE NON CRIMP CONTACTS

PART NUMBER	TYPE	FIG	WIRE SIZE		POST CROSS SECTION	ANTI-ROTATING BUSHING CAT. NR	EXTRACTION TOOL
			AWG	MM <sup>2</sup>			
RC16SE4*	HANDSOLDER	1	20 - 16	0,52 - 1,50	∅ 1,7	---	RX2025GE1 AND RX2025GE2
RC20M12G4*	MINI-WRAP	2	30 - 28 SOLID	0,05 - 0,08	0,636 x 0,635	J1661	
RCM207CGE00*	MAXI-WRAP	3	26 - 20 SOLID	0,13 - 0,50	1 x 1	J1661CGE00	
RC20M12E8*	DIPSOLDER	4	---	---	∅ 0,9	---	
RC20M12E83*	DIPSOLDER	5	---	---	∅ 0,9	---	
RC20M12E84*	DIPSOLDER	6	---	---	∅ 0,9	---	
RC20M12E86*	DIPSOLDER	7	---	---	∅ 0,9	---	
RC20M12E87*	DIPSOLDER	8	---	---	∅ 0,9	---	

\* Plating identification

Country	Jurisdiction & Control List
FR	NOT LISTED

P/N : SEE TABLE

C	14/12/2018	Cancelled the possibility of packing by 25 contacts : Part numbers RC--M--E25* deleted		--
ISS	DATE	Latest modification - by: ROUILLARD Ch		MOD N°
Designed by: CHARLOT MA		Date: 20/06/12	CUSTOMER DRAWING	
TITLE		TRIM-TRIO SOCKET CONTACT SIZE 16 SPECIFIC RC-----		
Scale	5/1	General linear Tolerances: ± 0,2	NPRDS / PROJECT RC	
Esterline Connection Technologies		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	A2	SOURIAU DRG N° BSC201448005		SHEET 1 / 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Contacts](#) category:*

*Click to view products by [Sunbank](#) manufacturer:*

Other Similar products are found below :

[RC16M23J](#) [133780-1](#) [RM20M13D28](#) [RM24M9D28](#) [RMMX110-1D28](#) [MS3474W10-6P L/C](#) [ELVP16100E](#) [164-901-CD](#) [EN3545007SCE](#)  
[BV002BSQ20049CZ](#) [BV002SSQ160404CZ](#) [1900ND05S1B00B](#) [166566-1](#) [1900ND04S1X00D](#) [ST-JL05-16S-C3-100](#) [ST-JL05-20S-C1-100](#)  
[ST-JL05-20S-C2-100](#) [T01-CRIMP-S03](#) [APK-SA16A07-002](#) [27963-15T12](#) [CONT-JL05-08S-C2-10](#) [CONT-JL05-12S-C1-10](#) [RC16M-23T](#)  
[RFD26L-1D28](#) [BV002ASJ16049CW](#) [JN1-22-20S-R-PKG100](#) [031-50213](#) [031-50565](#) [031-50794](#) [SJS861301M](#) [ST-JL05-16S-C1-100](#) [ST-](#)  
[JL05-20P-C1-100](#) [82911466K](#) [192991-0087](#) [192900-0570](#) [44-100-1414P-1000-101](#) [T3P16FC3LZ](#) [ST-JL05-16S-C2-3500](#) [ZP-4016-10NF](#)  
[CONT-JL05-12P-C1-10](#) [RM20M12G8D28](#) [031-50676](#) [12115010110](#) [RJFTVC2MG](#) [CAP-DACMDPC2](#) [031-50675-002](#) [CAP-DD1FDPC2](#)  
[CAP-DACMDPC1](#) [031-50966-010](#) [ASSP-10-F-A-C-SA](#)