


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEHAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.
 THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C'K'D'

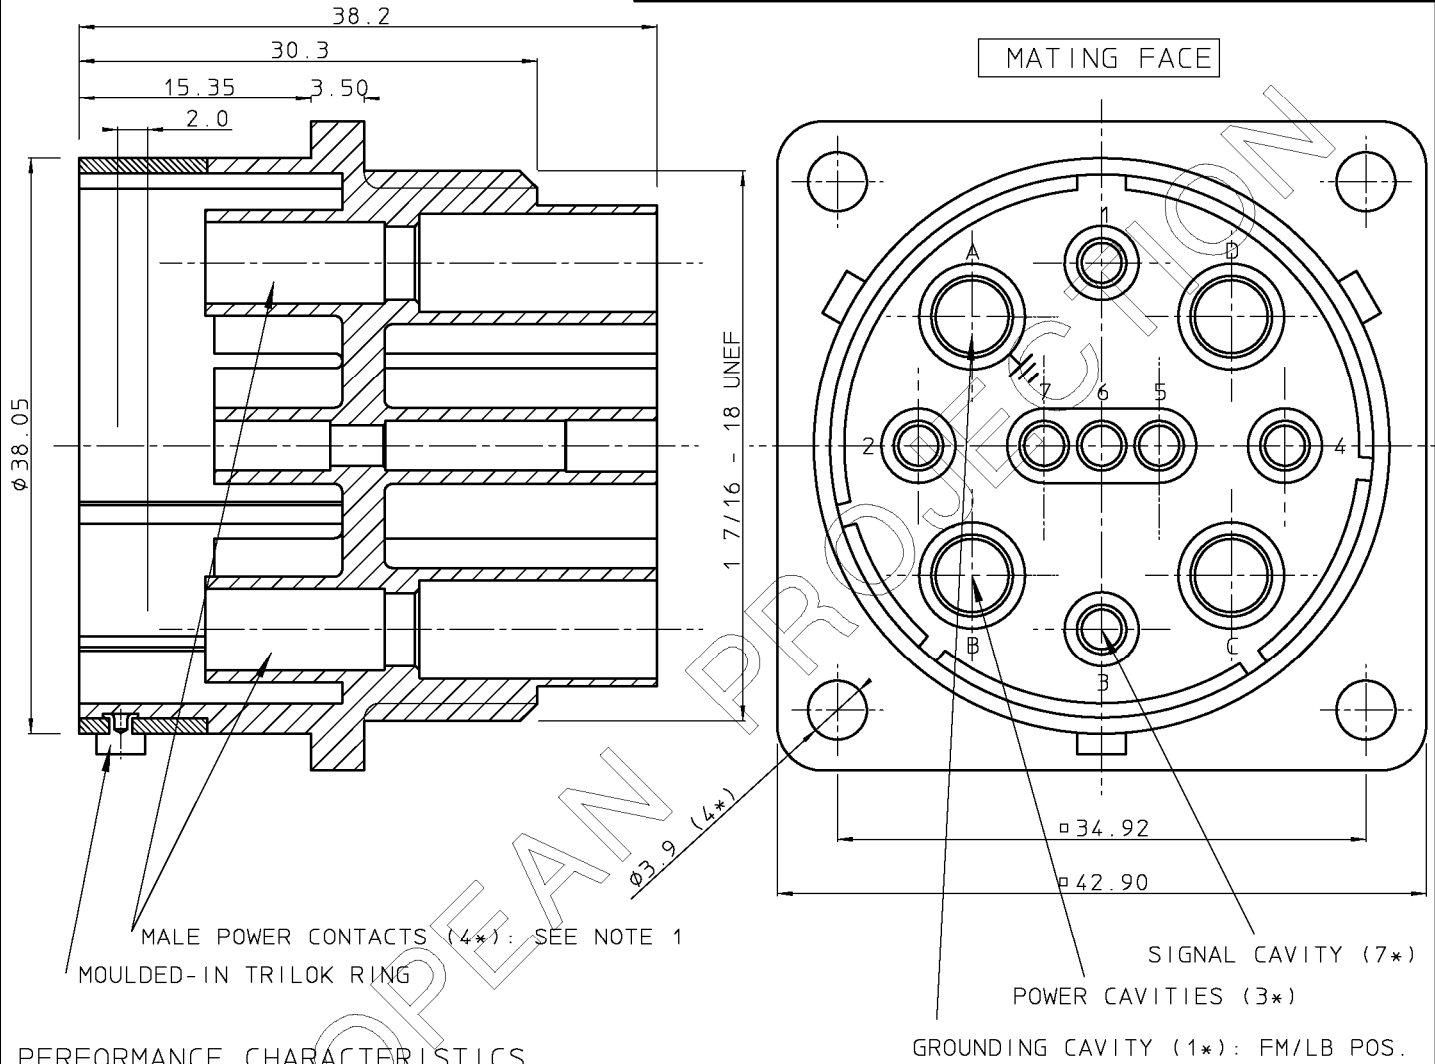

MALE POWER CONTACTS (4*): SEE NOTE 1
 MOULDED-IN TRILOK RING

SIGNAL CAVITY (7*)
 POWER CAVITIES (3*)
 GROUNDING CAVITY (1*): FM/LB POS.

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MΩ MIN.
- TEST POTENTIAL : 2000 V EFF. (SIGNAL) - 4000 V EFF> (POWER)
- CONNECTOR AS PER VDE 0110 CLASS III - POLLUTION DEGREE 3: 830 V AC EFF. (POWER CONTACTS)

MATERIAL

- BODY : GLASS-FILLED POLYESTER UL94-V0
 COLOUR : BLACK.
- TRILOK RING: HIGH STRENGTH CUZN ALLOY, NI PLATED

NOTES

- CONTACTS TO BE ORDERED SEPARATELY
- ACCEPTS Ø3.6MM MACHINED (POWER) AND Ø1.6MM MACHINED OR STAMPED AND FORMED (SIGN.) CONTACTS
- CONNECTOR TO BE MATED WITH UTG62411SN

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 2DEC ±0,1 ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	MALE RECEPTACLE 4 POWER Ø3.6 CONTACTS		
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	14-11-01	P. BUYCKX	CAT. No. UTG02411P		
ALL DIMENSIONS IN MM	PROD. MGR.			SOURIAU Route Nationale 23 72470 CHAMPAGNE	SCALE	
ALLE AFMETINGEN IN MM	PR. ENG. MGR.				BS, A , 203025, 000	0A
	PR. MGT. MGR.			DRAWING NR.	CUSTOMER DRAWING	REVISTION
	REFERENCES / REFERENTIES			NOT EXPORT CONTROLLED		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Sunbank](#) manufacturer:

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-474014-05S](#) [75-](#)
[474618-01S](#) [75-474618-04P](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-516](#) [8280-7PG-](#)
[519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#) [120-1833-000](#)
[QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU](#) [1000B BULK](#) [RD10A16-19-P6CS051/1](#) [RD10A20-31-](#)
[P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#) [1301860202](#) [1301240268](#)