



UTS LC

Fiber Optic connector for fast & reliable rollout

The new UTS LC allow easy ruggedization of standard LC optical contacts in a UTS connector shell

- Quick Locking**
 - Ergonomic 1/3-turn locking
 - Audible click
- Secure Mating**
 - Protected LC contact
 - Robust shell material
 - High strength cable retention system
- Optical Contact Multi-Sourcing**
 - Designed for all standard LC contacts
- Outdoor Use**
 - Waterproof IP67 / IP68
 - Resists Shock and vibration
- Long Life Warranty**
 - UV-resistant
 - Corrosion free

Typical Applications



Fiber to the Antenna



Fiber to the Home



Wind turbine



Security Cameras



Automation



Signalling



Technical features

Mechanical

- Housing and backshell: thermoplastic UL94-V0
- insert: thermoplastic UL94-V0
- Optical contacts: depends on LC customer choice
- Durability per IEC 61300-2-2: 500 mating/unmating
- Vibration per IEC 61300-2-1: Sinusoidal vibration, 5Hz to 500Hz, 3.5mm amplitude, 9.8m/s² above 9Hz
- Change of temperature per IEC 61300-2-22: 12 cycles 1hour, from -40°C to +85°C

Environmental

- Temperature range: from -40°C to +105°C
- Salt mist per IEC 61300-2-26: 96hours
- Sealing (mated) per IEC 60529: Dynamic IP68 under 10 meter of water for 1week
- UV resistance: no mechanical degradation or significant variation of colour after 5 years of exposure in natural environment (equivalent exposure to sun and moisture as per ISO4892)
- RoHS compliant and conforms, to the Chinese standard SJ/T1166-2006 (Chinese RoHS equivalent)

Optical*

- Exceeds performance Standard IEC 61753-1 Cat. E (extreme environment)
- Multimode contact: Insertion losses < 0.10dB over 97% of the samples Return losses > 30dB minimum
- Singlemode contact: Insertion losses < 0.25dB over 97% of the samples Return losses > 45dB minimum.

*depends on LC contact customer choice



Connector Part Numbers


Connector type	Backshell	Part number	
		Male insert	Female insert
Free hanging receptacle	Cable gland	UTS1JC18LCN	-
Plug	Cable gland	-	UTS6JC18LCN
Jam nut receptacle	Without	UTS718LCN	-

Accessories


Sealing Caps					
<p>For UTS6JC18LCN</p>  <table border="1"> <tr> <td>Part number</td> </tr> <tr> <td>UTS618DCG2</td> </tr> </table>	Part number	UTS618DCG2	<p>For UTS1JC18LCN & UTS718LCN</p>  <table border="1"> <tr> <td>Part number</td> </tr> <tr> <td>UTS18DCG2</td> </tr> </table>	Part number	UTS18DCG2
Part number					
UTS618DCG2					
Part number					
UTS18DCG2					

Dimensions (mm)


Free Hanging Receptacle - UTS1JC18LCN

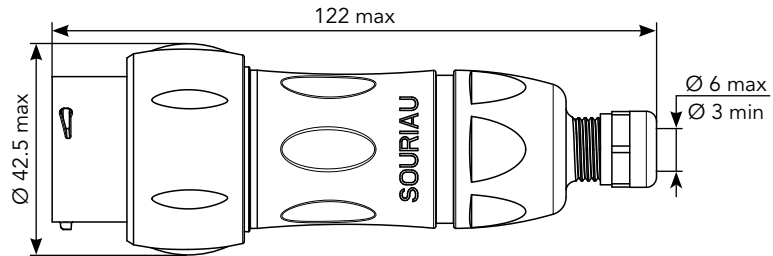

Plug - UTS6JC18LCN

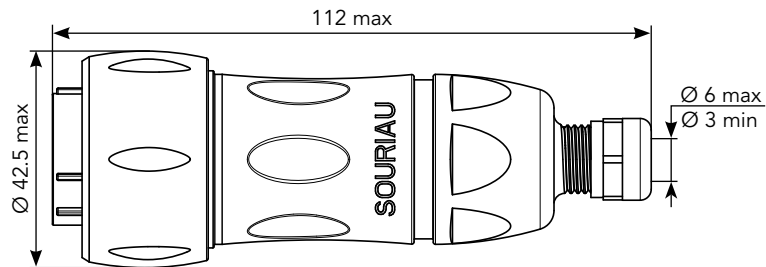


Jam Nut Receptacle - UTS718LCN

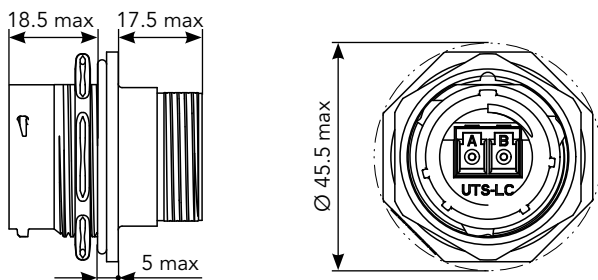


Sealing Cap

UTS618DCG2
for UTS6JC18LCN



UTS18DCG2
for UTS1JC18LCN & UTS718LCN



SOURIAU

www.souriau-industrial.com

contactindustry@souriau.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [Sunbank](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709034706](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#) [9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446F10SL-4S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#) [AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104498](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [181-011-126](#) [181-011-S](#) [181-057-126](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#) [9442W14S-10P](#) [9446F16-10S-190](#)