

# DATA SHEET 数据表

**BONSDA CODE** :                     KSP-06H                      
代码

**DESCRIPTION** :                     DIP SWITCH                      
描述

## CUSTOMER APPROVAL

客户确认

**PART NO.** : \_\_\_\_\_  
料号

**SIGNATURES** : \_\_\_\_\_  
签章

## SHENZHEN ZIGENG TECHNOLOGY CO. , LTD

ADDRESS D BUILDING 3TH FLOOR,ZIGENG RODA NO.49,KENGZI STREETS,  
PINGSHAN NEW DISTRICT, SHENZHEN, GUANGDONG PROVINCE, CHINA

TEL +86 755-8451 7080

FAX +86 755-2782 3630





E-MAIL LINSL@ZIGKJ.COM

WEBSITE WWW.ZIGKJ.COM



**BONSDA**  
ELECTRONICS

MRK.	DATE	
△		

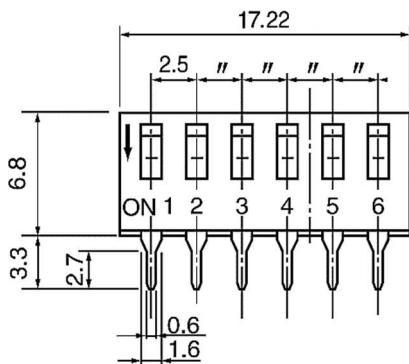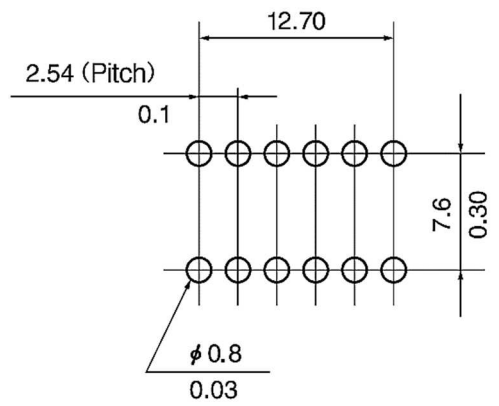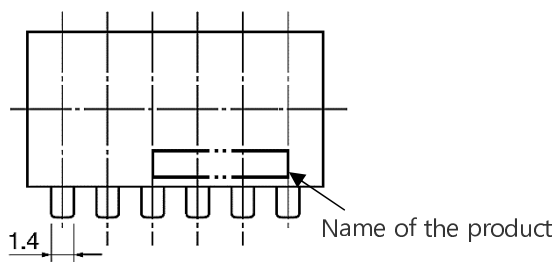

Y.N JEON

S.M PARK

J.

0 -0 -0

### 1. Electrical Characteristics

- 1-1 Contact Rating : 0.4VA (DC 24V MAX)
- 1-2 Contact Resistance : 50mΩ MAX (DC 2V 10mA)
- 1-3 Insulation Resistance : 1000 MΩ MIN at 100V DC
- 1-4 Dielectric Strength : 300V AC for 1 min.

### 2. Mechanical Characteristics

- 2-1 Temperature Rating : -30°C ~ +85°C (operating)
- 2-2 Operating force : 800gf MAX
- 2-3 Mechanical life : 1,000 Cycles MIN
- 2-4 Stroke : 1.3mm
- 2-5 Operation life : DC 5V 10mA, 20~30 cycles/min, 1,000 cycles

### 3. Environmental Characteristics

- 3-1 Humidity : 90~95% RH, 40°C±2°C for 96 hours.
- 3-2 Low temperature : -45°C±3°C for 96 hours.
- 3-3 High temperature : 100°C±3°C for 96 hours.
- 3-4 Salt mist test : 50°C±2°C, salt solution 5% for 48 hours.
- 3-5 Soldering test : Thickness 1.6mm P.C.B, 245°C, 10 sec.
- 3-6 Vibration resistance : 10~55Hz, peak to peak 1.5mm, 2 hours each for a total of 6 hours.
- 3-7 Impact shock resistance : acceleration 50G, time 11±1mS,  
3 cycles each in 6 directions for a total 18 cycles
- 3-8 Soldering temperature : 245°C±5°C for 5 sec. (wave soldering)  
320°C±10°C for 3 sec. (manual soldering)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Sungmun](#) manufacturer:*

Other Similar products are found below :

[78M03S](#) [79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [A7SS-M](#) [DBP 2110](#) [DBP 2112](#) [DBS1008](#) [DHN02FTVTR](#) [DHN10T](#) [DHS108](#)  
[DPL08TN](#) [DRD16CSE04](#) [DRR4010](#) [DRR60016](#) [DRS4016](#) [BD06E](#) [1825008-1](#) [1825444-1](#) [25.350.0653.0](#) [LA2-DC12](#) [SBS 5004 TG](#)  
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [2161391-1](#) [2-1825058-8](#) [CCVA 2.5/ 4-G-5.08](#) [P26THRR32](#)  
[25.330.0653.1](#) [25.352.0353.0](#) [MDG305ST](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DBP2008](#) [DBS1003](#) [DBS2008](#) [438872000](#)  
[DRD10CRAE04](#) [DRS1604](#) [DSR02T](#) [DSS 208 N](#) [5-1825033-1](#) [106-SDN06-EV](#) [1-1437507-6](#) [E2FMX2D1M1TGJ03M](#)  
[E3ZMCT81M1TJ03M](#)