



Ring Core Common Mode Choke for Automotive Signal Line – ACSR Series

Operating Temp. : -50°C ~+150°C



FEATURES

- The circular type, small size and low profile
- Suppression of common mode noise at high frequency
- Excellent mechanical
- AEC-Q200 verified



APPLICATIONS

- Data and signal line

PRODUCT IDENTIFICATION



<u>ACSR</u> ①	<u>0906</u> ②	<u>S</u> ③	<u>510</u> ④	<u>N</u> ⑤	<u>T</u> ⑥
②	Type	External Dimensions (L×W) (mm)			Feature Type
ACSR	Ring Core Common Mode Choke for Automotive Signal Line	0906	9.0×6.0		S Sector Winding C Bifilar Winding
④	Inductance(μH)			Tolerance Limits	Packing
Example	Nominal Value			N ±30%	T Tape & Reel
250	25				
510	51				
101	100				

SHAPE AND DIMENSIONS

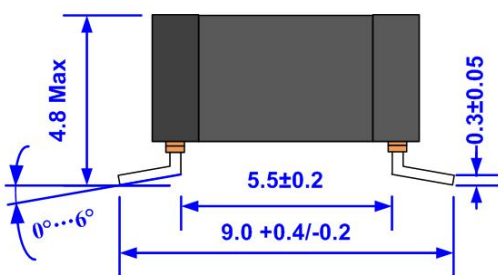

Recommended Land Pattern

Unit: mm

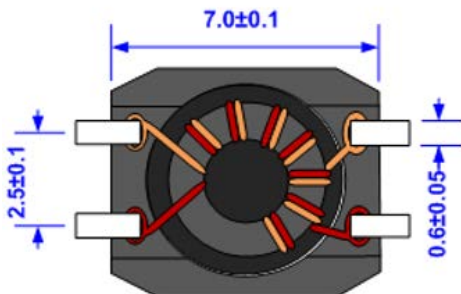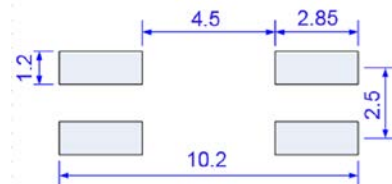

SPECIFICATIONS

ACSR0906 TYPE


Part Number	Inductance (μH)	Stray Inductance (nH) Typ.	DCR (Ω) Max.	Rated Current (mA) Max.	V _{test} (VDC/2S)	Inductance Tolerance	Operation Temperature Range (°C)
ACSR0906C050NT	5(@ 100KHz/0.1mA)	40 (@1MHz/5mA)	0.06	1200	250	±30%	-50~+150
ACSR0906S060NT	6(@ 100KHz/0.1mA)	250 (@1MHz/5mA)	0.02	2000	250	± 30%	-50~+150
ACSR0906C110NT	11(@ 100KHz/0.1mA)	50 (@1MHz/5mA)	0.08	800	250	±30%	-50~+150
ACSR0906C250NT	25(@ 100KHz/0.1mA)	60 (@100K Hz/5mA)	0.11	800	250	±30%	-50~+150
ACSR0906S250NT	25(@ 100KHz/0.1mA)	1400 (@100KHz/5mA)	0.11	800	250	±30%	-50~+150
ACSR0906C510NT	51(@ 100KHz/0.1mA)	70 (@100KHz/5mA)	0.14	800	250	±30%	-50~+150
ACSR0906S510NT	51(@ 100KHz/0.1mA)	2300 (@100KHz/5mA)	0.14	800	250	±30%	-50~+150
ACSR0906C101NT	100(@ 100KHz/0.1mA)	100 (@100KHz/5mA)	0.18	500	250	±30%	-50~+150
ACSR0906C471NT	470(@ 100KHz/0.1mA)	100 (@100KHz/5mA)	0.17	700	750	-30%/+50%	-40~+125
ACSR0906C102NT	1000(@ 100KHz/0.1mA)	70 (@100KHz/5mA)	0.14	700	750	-30%/+50%	-40~+125
ACSR0906C222NT	2200(@ 10KHz/0.1mA)	120 (@100KHz/5mA)	0.4	500	750	-30%/+50%	-40~+125
ACSR0906C472NT	4700(@ 10KHz/0.1mA)	250 (@100KHz/5mA)	0.55	400	750	-30%/+50%	-40~+125

1.Storage temperature range (packaging conditions): -10°C~+40°C and RH 70% (Max.)









2.Rated voltage:42V AC (50/60Hz) / 80V DC

※: Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.




EQUIVALENT CIRCUIT

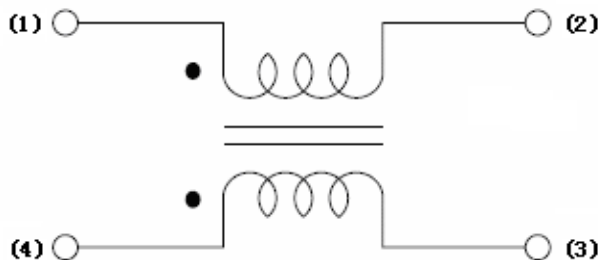

TYPICAL ELECTRICAL CHARACTERISTICS

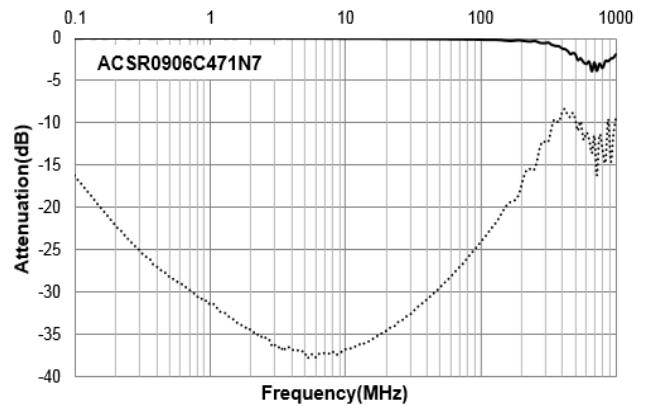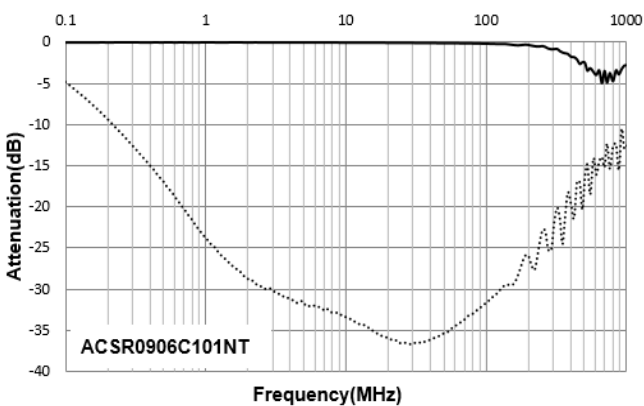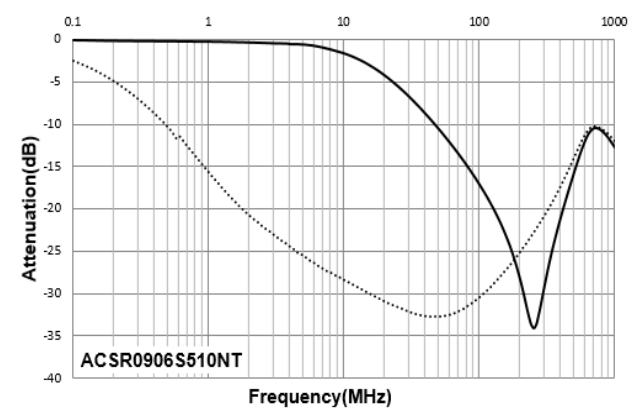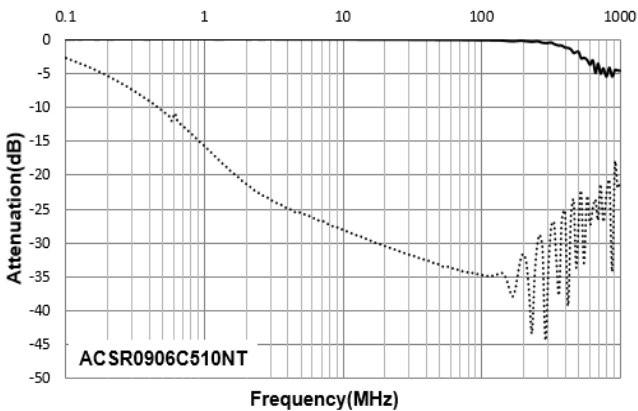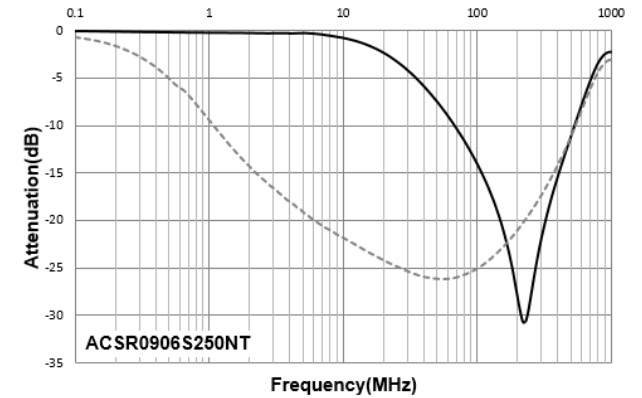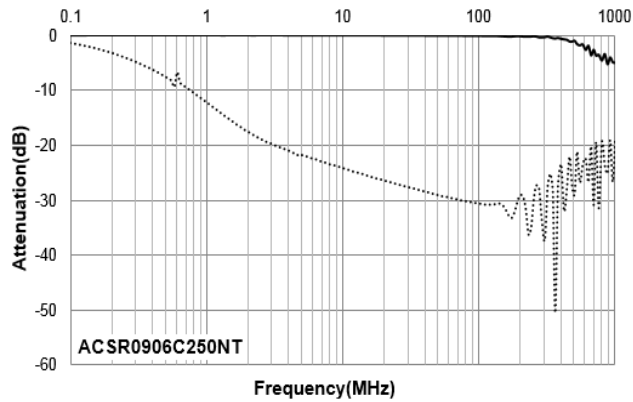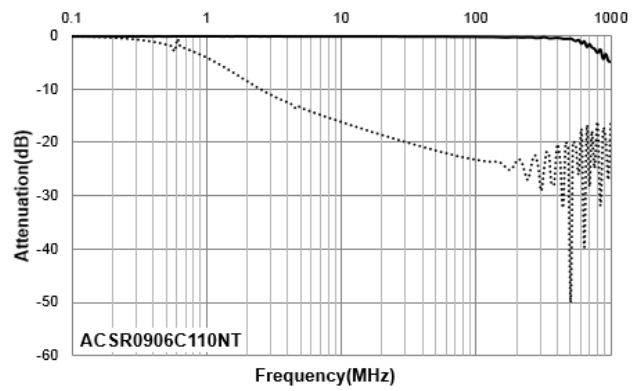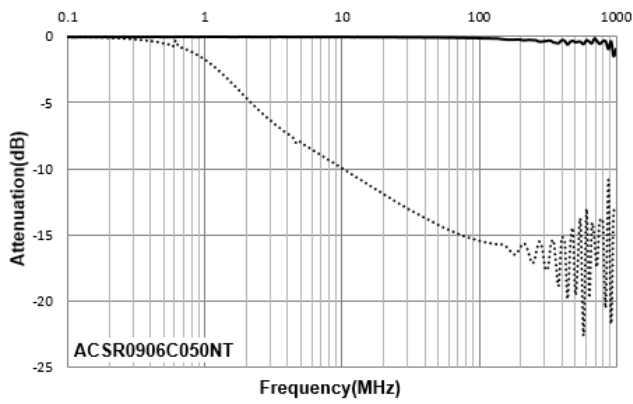

TYPICAL ELECTRICAL CHARACTERISTICS

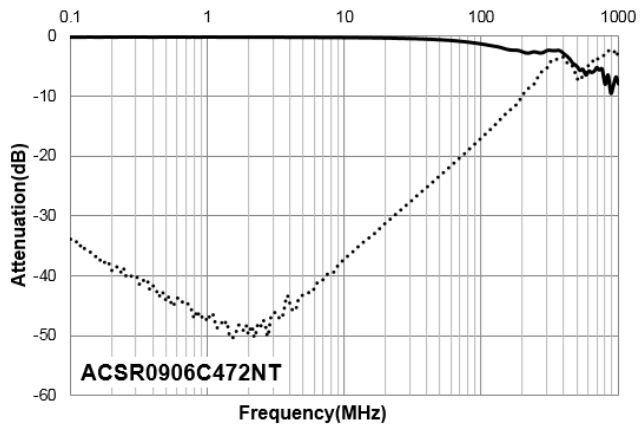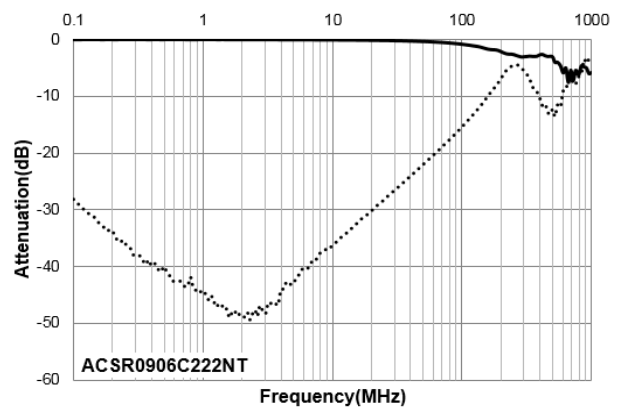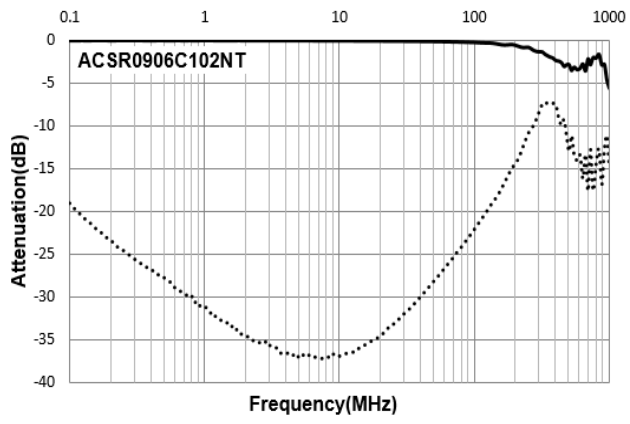

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)
[UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9HF050500](#)
[UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB 113](#)
[OR5](#) [2752045447](#) [CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#)
[744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#)
[7446630047](#)