



# Wire Wound SMD Power Inductors – AMWPH Series

Operating Temp. : -40°C~+125°C (Including self-heating)

## FEATURES

- High saturation current, low DC resistance
- Excellent temperature stability
- High reliability,
- AEC-Q200 verified

## APPLICATIONS

- Infotainment system
- LED lighting
- Airbag
- Power supply system except for power engineer chassis and safety system

## PRODUCT IDENTIFICATION

**AMWPH**

①

**6045**

②

**S**

③

**2R2**

④

**M**

⑤

**T**

⑥

|       |                               |
|-------|-------------------------------|
| ①     | Type                          |
| AMWPH | Wire Wound SMD Power Inductor |

|   |              |
|---|--------------|
| ③ | Feature Type |
| S | S Type       |


|      |                                  |         |
|------|----------------------------------|---------|
| ②    | External Dimensions (LxWxH) [mm] |         |
| 3015 | 3.0                              | 3.0x1.5 |
| 4018 | 4.0                              | 4.0x1.8 |
| 5030 | 5.0                              | 5.0x2.9 |
| 6045 | 6.0                              | 6.0x4.4 |

|         |                    |  |
|---------|--------------------|--|
| ④       | Nominal Inductance |  |
| Example | Nominal Value      |  |
| 2R2     | 2.2μH              |  |
| 100     | 10μH               |  |

|   |             |
|---|-------------|
| ⑥ | Packing     |
| T | Tape & Reel |

|   |                      |  |
|---|----------------------|--|
| ⑤ | Inductance Tolerance |  |
| N | ±30%                 |  |
| M | ±20%                 |  |

## SHAPE AND DIMENSIONS

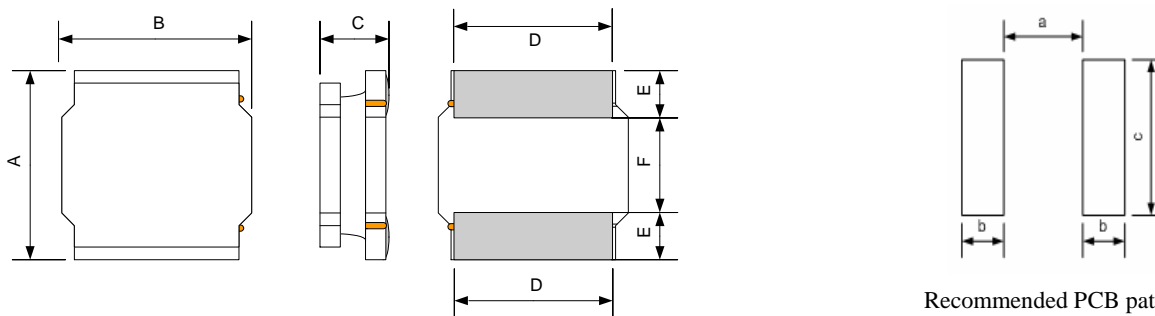

Recommended PCB pattern

Unit: mm

| Series     | A       | B       | C        | D       | E        | F        | a        | b       | c       |
|------------|---------|---------|----------|---------|----------|----------|----------|---------|---------|
| AMWPH3015S | 3.0±0.2 | 3.0±0.2 | 1.5±0.15 | 2.5±0.2 | 0.9±0.2  | /        | 1.0Typ.  | 1.4Typ. | 2.7Typ. |
| AMWPH4018S | 4.0±0.2 | 4.0±0.2 | 1.8±0.2  | 3.3±0.2 | 1.1±0.2  | /        | 1.2Typ.  | 1.8Typ. | 3.7Typ. |
| AMWPH5030S | 5.0±0.2 | 5.0±0.2 | 2.9±0.2  | 4.0±0.2 | 1.25±0.2 | 2.3 Typ. | 1.8Typ.  | 2.0Typ. | 4.2Typ  |
| AMWPH6045S | 6.0±0.3 | 6.0±0.3 | 4.4±0.2  | 4.9±0.3 | 1.55±0.3 | 2.8 Typ. | 2.5 Typ. | 2.2Typ. | 5.7Typ. |

## SPECIFICATIONS

### AMWPH3015S Series

| Parameters      | Inductance | DC Resistance |       | Saturation Current | Heat Rating Current |
|-----------------|------------|---------------|-------|--------------------|---------------------|
|                 | 0.1MHz,1V  | Max.          | Typ.  | Typ.               | Typ.                |
| Unit            | uH         | Ω             |       | A                  | A                   |
| Symbol          | L          | DCR           |       | Isat               | Irms                |
| AMWPH3015S1R0NT | 1.0±30%    | 0.043         | 0.036 | 2.75               | 2.40                |
| AMWPH3015S1R5NT | 1.5±30%    | 0.052         | 0.043 | 2.20               | 2.22                |
| AMWPH3015S2R2MT | 2.2±20%    | 0.068         | 0.057 | 1.70               | 1.92                |
| AMWPH3015S3R3MT | 3.3±20%    | 0.098         | 0.082 | 1.50               | 1.55                |
| AMWPH3015S4R7MT | 4.7±20%    | 0.120         | 0.100 | 1.15               | 1.47                |
| AMWPH3015S6R8MT | 6.8±20%    | 0.180         | 0.150 | 1.00               | 1.20                |
| AMWPH3015S100MT | 10±20%     | 0.288         | 0.240 | 0.80               | 0.95                |
| AMWPH3015S150MT | 15±20%     | 0.360         | 0.300 | 0.70               | 0.84                |
| AMWPH3015S220MT | 22±20%     | 0.552         | 0.460 | 0.56               | 0.70                |
| AMWPH3015S330MT | 33±20%     | 1.092         | 0.910 | 0.48               | 0.50                |
| AMWPH3015S470MT | 47±20%     | 1.248         | 1.040 | 0.35               | 0.48                |
| AMWPH3015S101MT | 100±20%    | 2.880         | 2.400 | 0.25               | 0.30                |

### AMWPH4018S Series

| Parameters      | Inductance | DC Resistance |       | Saturation Current | Heat Rating Current |
|-----------------|------------|---------------|-------|--------------------|---------------------|
|                 | 0.1MHz,1V  | Max.          | Typ.  | Typ.               | Typ.                |
| Unit            | uH         | Ω             |       | A                  | A                   |
| Symbol          | L          | DCR           |       | Isat               | Irms                |
| AMWPH4018S1R0NT | 1.0±30%    | 0.036         | 0.030 | 5.50               | 3.00                |
| AMWPH4018S1R5NT | 1.5±30%    | 0.043         | 0.036 | 4.60               | 2.85                |
| AMWPH4018S2R2MT | 2.2±20%    | 0.060         | 0.050 | 4.00               | 2.55                |
| AMWPH4018S3R3MT | 3.3±20%    | 0.066         | 0.055 | 2.90               | 2.50                |
| AMWPH4018S4R7MT | 4.7±20%    | 0.094         | 0.078 | 2.20               | 2.00                |
| AMWPH4018S6R8MT | 6.8±20%    | 0.127         | 0.106 | 1.90               | 1.75                |
| AMWPH4018S8R2MT | 8.2±20%    | 0.172         | 0.143 | 1.85               | 1.50                |
| AMWPH4018S100MT | 10±20%     | 0.187         | 0.156 | 1.50               | 1.48                |
| AMWPH4018S120MT | 12±20%     | 0.278         | 0.232 | 1.75               | 1.10                |
| AMWPH4018S150MT | 15±20%     | 0.354         | 0.295 | 1.50               | 1.00                |
| AMWPH4018S220MT | 22±20%     | 0.408         | 0.340 | 1.20               | 0.95                |
| AMWPH4018S330MT | 33±20%     | 0.582         | 0.485 | 1.00               | 0.70                |
| AMWPH4018S470MT | 47±20%     | 0.774         | 0.645 | 0.70               | 0.65                |

## SPECIFICATIONS

### AMWPH5030S Series

| Parameters      | Inductance | DC Resistance |       | Saturation Current | Heat Rating Current |
|-----------------|------------|---------------|-------|--------------------|---------------------|
|                 | 0.1MHz,1V  | Max.          | Typ.  | Typ.               | Typ.                |
| Unit            | uH         | Ω             |       | A                  | A                   |
| Symbol          | L          | DCR           |       | Isat               | Irms                |
| AMWPH5030SR47NT | 0.47±30%   | 0.013         | 0.011 | 13.00              | 5.15                |
| AMWPH5030S1R0NT | 1.0±30%    | 0.017         | 0.014 | 9.50               | 4.55                |
| AMWPH5030S1R5NT | 1.5±30%    | 0.022         | 0.018 | 7.50               | 4.00                |
| AMWPH5030S2R2MT | 2.2±20%    | 0.038         | 0.032 | 7.10               | 3.20                |
| AMWPH5030S3R3MT | 3.3±20%    | 0.043         | 0.036 | 5.10               | 2.75                |
| AMWPH5030S4R7MT | 4.7±20%    | 0.068         | 0.057 | 4.50               | 2.40                |
| AMWPH5030S100MT | 10±20%     | 0.115         | 0.096 | 3.15               | 1.60                |
| AMWPH5030S220MT | 22±20%     | 0.254         | 0.212 | 1.95               | 0.88                |
| AMWPH5030S330MT | 33±20%     | 0.367         | 0.306 | 1.55               | 0.75                |

### AMWPH6045S Series

| Parameters      | Inductance | DC Resistance |       | Saturation Current | Heat Rating Current |
|-----------------|------------|---------------|-------|--------------------|---------------------|
|                 | 0.1MHz,1V  | Max.          | Typ.  | Typ.               | Typ.                |
| Unit            | uH         | Ω             |       | A                  | A                   |
| Symbol          | L          | DCR           |       | Isat               | Irms                |
| AMWPH6045SR55MT | 0.55±20%   | 0.009         | 0.007 | 15.50              | 6.50                |
| AMWPH6045S1R0MT | 1.0±20%    | 0.013         | 0.010 | 10.50              | 5.90                |
| AMWPH6045S1R5MT | 1.5±20%    | 0.016         | 0.012 | 8.70               | 5.40                |
| AMWPH6045S2R2MT | 2.2±20%    | 0.020         | 0.016 | 6.90               | 4.70                |
| AMWPH6045S4R7MT | 4.7±20%    | 0.040         | 0.030 | 5.15               | 3.40                |
| AMWPH6045S100MT | 10±20%     | 0.060         | 0.049 | 3.45               | 2.70                |
| AMWPH6045S150MT | 15±20%     | 0.085         | 0.071 | 2.70               | 2.05                |
| AMWPH6045S220MT | 22±20%     | 0.140         | 0.116 | 2.25               | 1.75                |
| AMWPH6045S470MT | 47±20%     | 0.300         | 0.225 | 1.50               | 1.20                |
| AMWPH6045S680MT | 68±20%     | 0.395         | 0.328 | 1.30               | 1.00                |
| AMWPH6045S101MT | 100±20%    | 0.560         | 0.460 | 1.05               | 0.85                |

Note:

- ※1 : Rated current: Isat or Irms, whichever is smaller.
- ※2 : Saturation Current : DC current at which the inductance drops approximate 30% from its value without current.
- ※3 : Heat Rating Current: DC current that causes the temperature rise ( $\Delta T=40^{\circ}\text{C}$ ) from  $20^{\circ}\text{C}$  ambient;  
The part temperature (ambient + temp. rise) should not exceed  $125^{\circ}\text{C}$  under worst case operating conditions.  
Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sunlord](#) manufacturer:*

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)