


Multilayer Chip Power Inductor – MPH Series

Operating Temp. : -55°C~+125°C



FEATURES

- Higher DC bias current and lower DC resistance due to trench technology
- Low profile and thin thickness
- Monolithic structure for high reliability
- Excellent solderability and high heat resistance
- No cross coupling due to magnetic shield

APPLICATIONS

- DC-DC converter circuits for mobile phones, wearable devices, DVCs, HDDs, etc.

PRODUCT IDENTIFICATION

MPH **201210** **S** **R47** **M** **T** **B01**

①

②

③

④

⑤

⑥

⑦

①

| Type | |
|------|---------------------|
| MPH | Chip Power Inductor |

②

| External Dimensions (L×W×H) (mm) | |
|----------------------------------|---------------|
| 160805 | 1.6×0.8×0.55 |
| 160809 | 1.6×0.8×0.95 |
| 201205 | 2.0×1.25×0.55 |
| 201206 | 2.0×1.25×0.6 |
| 201210 | 2.0×1.25×1.0 |
| 201214 | 2.0×1.25×1.45 |
| 201610 | 2.0×1.6×1.0 |
| 201612 | 2.0×1.6×1.2 |
| 252010 | 2.5×2.0×1.0 |
| 252012 | 2.5×2.0×1.2 |

③

| Feature Type | |
|--------------|-------------------------|
| S | Standard |
| U | Ultra Low Rdc |
| H | High Saturation Current |
| C | Inner Core |

④

| Nominal Inductance | |
|--------------------|---------------|
| Example | Nominal Value |
| R47 | 0.47μH |
| 4R7 | 4.7μH |


⑤

| Inductance Tolerance | |
|----------------------|------|
| M | ±20% |
| N | ±30% |

⑥

| Packing | |
|---------|-------------|
| T | Tape & Reel |

SHAPE AND DIMENSIONS

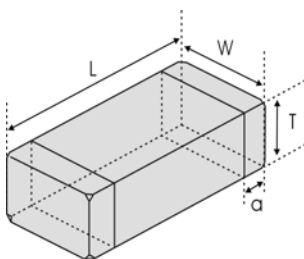

Unit: mm [inch]

| Type | L | W | T | a |
|--------|---|-------------------------|-------------------------|------------------------|
| 160805 | 1.60±0.15 [.063±.006] | 0.8±0.15 [.031±.006] | 0.5±0.05 [.020±.002] | 0.3±0.2 [.012±.008] |
| 160809 | 1.60±0.15 [.063±.006] | 0.8±0.15 [.031±.006] | 0.8±0.15 [.031±.006] | 0.3±0.2 [.012±.008] |
| 201205 | 2.0(+0.3, -0.1) [.079(+.012, -.004)] | 1.25±0.2 [.049±.008] | 0.5±0.05 [.020±.004] | 0.5±0.3 [.020±.012] |


SHAPE AND DIMENSIONS

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2018/06/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

Unit: mm [inch]

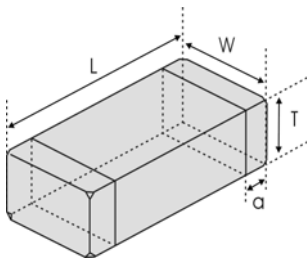

| Type | L | W | T | a |
|--------|--|--|-------------------------|------------------------|
| 201206 | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.25±0.2 [.049±.008] | 0.5±0.1 [.020±.004] | 0.5±0.3 [.020±.012] |
| 201210 | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.25±0.2 [.049±.008] | 0.9±0.1 [.035±.004] | 0.5±0.3 [.020±.012] |
| 201214 | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.25±0.2 [.049±.008] | 1.25±0.2 [.049±.008] | 0.5±0.3 [.020±.012] |
| 201610 | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.6±0.2 [.063±.008] | 0.9±0.1 [.035±.004] | 0.5±0.3 [.020±.012] |
| 201612 | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.6±0.2 [.063±.008] | 1.1±0.1 [.043±.004] | 0.5±0.3 [.020±.012] |
| 252010 | 2.5±0.2 [.098±.008] | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 0.9±0.1 [.035±.004] | 0.5±0.3 [.020±.012] |
| 252012 | 2.5±0.2 [.098±.008] | 2.0(+0.3,-0.1) [.079(+.012, -.004)] | 1.1±0.1 [.043±.004] | 0.5±0.3 [.020±.012] |

SPECIFICATION

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|-------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | I _{rms} | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH160805SR22□T | 0.22 | 1 | 150 | 120 | 180 | 1200 | 1450 | 1200 | 0.5±0.05 [.020±.002] |
| MPH160805SR33□T | 0.33 | 1 | 200 | 160 | 140 | 1100 | 1350 | 1100 | |
| MPH160805SR47□T | 0.47 | 1 | 225 | 180 | 120 | 850 | 1050 | 1150 | |
| MPH160805SR68□T | 0.68 | 1 | 275 | 220 | 100 | 650 | 800 | 900 | |
| MPH160805S1R0□T | 1.0 | 1 | 400 | 320 | 90 | 580 | 700 | 800 | |
| MPH160809SR22□T | 0.22 | 1 | 125 | 100 | 200 | 1350 | 1600 | 1250 | 0.8±0.15 [.031±.006] |
| MPH160809SR33□T | 0.33 | 1 | 162 | 130 | 190 | 1250 | 1500 | 1200 | |
| MPH160809SR47□T | 0.47 | 1 | 187 | 150 | 180 | 1000 | 1200 | 1100 | |
| MPH160809SR68□T | 0.68 | 1 | 225 | 180 | 160 | 950 | 1100 | 1150 | |
| MPH160809S1R0□T | 1.0 | 1 | 250 | 200 | 125 | 650 | 800 | 1000 | |
| MPH160809S1R5□T | 1.5 | 1 | 285 | 230 | 100 | 420 | 500 | 900 | |
| MPH160809S2R2□T | 2.2 | 1 | 375 | 300 | 80 | 250 | 300 | 850 | |
| MPH160809S2R7□T | 2.7 | 1 | 425 | 340 | 90 | 180 | 220 | 750 | |
| MPH160809S3R3□T | 3.3 | 1 | 500 | 400 | 100 | 125 | 150 | 700 | |
| MPH160809S4R7□T | 4.7 | 1 | 500 | 400 | 65 | 65 | 80 | 700 | |

MPH2012 TYPE

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|-------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | I _{rms} | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH201205SR54□T | 0.54 | 1 | 150 | 120 | 120 | 950 | 1100 | 1200 | 0.5±0.05 [.020±.002] |
| MPH201205S1R0□T | 1.0 | 1 | 225 | 180 | 40 | 700 | 900 | 900 | |
| MPH201206SR22□T | 0.22 | 1 | 94 | 70 | 100 | 1200 | 1450 | 1600 | 0.5±0.1 [.020±.004] |
| MPH201206SR33□T | 0.33 | 1 | 125 | 100 | 90 | 1200 | 1350 | 1200 | |
| MPH201206SR47□T | 0.47 | 1 | 150 | 120 | 80 | 1100 | 1300 | 1100 | |

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2018/06/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

SPECIFICATION

MPH2012 TYPE

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|-------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | I _{rms} | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH201206S1R0□T | 1.0 | 1 | 238 | 190 | 40 | 600 | 700 | 800 | 0.5±0.1 [.020±.004] |
| MPH201206S1R5□T | 1.5 | 1 | 325 | 260 | 35 | 425 | 500 | 700 | |
| MPH201206S2R2□T | 2.2 | 1 | 400 | 320 | 30 | 300 | 350 | 600 | |
| MPH201210SR47□T | 0.47 | 1 | 100 | 80 | 100 | 1000 | 1200 | 1500 | 0.9±0.1 [.035±.004] |
| MPH201210SR56□T | 0.56 | 1 | 135 | 110 | 70 | 1200 | 1500 | 1300 | |
| MPH201210S1R0□T | 1.0 | 1 | 137 | 110 | 60 | 950 | 1150 | 1300 | |
| MPH201210S1R5□T | 1.5 | 1 | 200 | 160 | 50 | 700 | 800 | 1100 | |
| MPH201210S2R2□T | 2.2 | 1 | 250 | 200 | 40 | 420 | 500 | 900 | |
| MPH201210H2R2□T | 2.2 | 1 | 250 | 200 | 40 | 500 | 600 | 900 | |
| MPH201210S3R3□T | 3.3 | 1 | 250 | 200 | 30 | 280 | 350 | 900 | |
| MPH201210S4R7□T | 4.7 | 1 | 312 | 250 | 30 | 230 | 280 | 800 | |
| MPH201214S4R7□T | 4.7 | 1 | 500 | 400 | 20 | 540 | 630 | 750 | |
| MPH201214S6R8□T | 6.8 | 1 | 375 | 300 | 45 | 210 | 250 | 1000 | |
| MPH201214S100□T | 10.0 | 1 | 375 | 300 | 35 | 110 | 130 | 1000 | 1.25±0.2 [.049±.008] |

MPH2016 TYPE

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|-------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | I _{rms} | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH201610SR47□T | 0.47 | 1 | 100 | 80 | 100 | 1350 | 1600 | 1500 | 0.9±0.1 [.035±.004] |
| MPH201610S1R0□T | 1.0 | 1 | 112 | 90 | 70 | 1000 | 1200 | 1400 | |
| MPH201610S1R5□T | 1.5 | 1 | 137 | 110 | 60 | 600 | 700 | 1200 | |
| MPH201610S2R2□T | 2.2 | 1 | 137 | 110 | 50 | 420 | 500 | 1200 | |
| MPH201610S3R3□T | 3.3 | 1 | 150 | 120 | 40 | 270 | 330 | 1200 | |
| MPH201610S4R7□T | 4.7 | 1 | 175 | 140 | 30 | 180 | 220 | 1100 | |
| MPH201612S6R8□T | 6.8 | 1 | 212 | 170 | 40 | 180 | 220 | 1200 | 1.25±0.2 [.049±.008] |
| MPH201612S100□T | 10.0 | 1 | 312 | 250 | 35 | 170 | 200 | 1100 | |

MPH2520 TYPE

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | I _{rms} | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH252010SR47□T | 0.47 | 1 | 50 | 40 | 105 | 1300 | 1500 | 1800 | 0.9±0.1 [.035±.004] |
| MPH252010S1R0□T | 1.0 | 1 | 75 | 60 | 70 | 1150 | 1400 | 1600 | |
| MPH252010S1R5□T | 1.5 | 1 | 87 | 70 | 65 | 1000 | 1200 | 1500 | |
| MPH252010S1R8□T | 1.8 | 1 | 100 | 80 | 60 | 700 | 950 | 1300 | |
| MPH252010S2R2□T | 2.2 | 1 | 100 | 80 | 55 | 700 | 850 | 1300 | |
| MPH252010S3R3□T | 3.3 | 1 | 125 | 100 | 30 | 380 | 450 | 1200 | |
| MPH252010S4R7□T | 4.7 | 1 | 137 | 110 | 25 | 270 | 320 | 1100 | |
| MPH252010C2R2□T | 2.2 | 1 | 250 | 200 | 60 | 1250 | 1500 | 1200 | |
| MPH252010C3R3□T | 3.3 | 1 | 312 | 250 | 55 | 1000 | 1200 | 1100 | |

SPECIFICATION

MPH2520 TYPE

| Part Number | Inductance | L Test Freq. L | DC Resistance | | Min. Self-resonant Frequency | Saturation Current Typ. | | Heat Rating Current Max. | Thickness |
|-----------------|------------|----------------|---------------|------|------------------------------|-------------------------|------|--------------------------|------------------------|
| Units | μH | MHz | mΩ | | MHz | mA | | mA | mm [inch] |
| Symbol | L | Freq. | DCR | | S.R.F | Isat | | Irms | T |
| | | | Max. | Typ. | | Max. | Typ. | | |
| MPH252010C4R7□T | 4.7 | 1 | 475 | 380 | 35 | 630 | 750 | 900 | 0.9±0.1 [.035±.004] |
| MPH252010C6R8□T | 6.8 | 1 | 562 | 450 | 30 | 300 | 350 | 750 | |
| MPH252010C100□T | 10.0 | 1 | 625 | 500 | 25 | 210 | 250 | 700 | |
| MPH252012S4R7□T | 4.7 | 1 | 225 | 180 | 30 | 640 | 750 | 1000 | 1.1±0.1 [0.43±.004] |
| MPH252012C1R0□T | 1.0 | 1 | 106 | 85 | 85 | 1750 | 2100 | 2100 | |
| MPH252012C2R2□T | 2.2 | 1 | 312 | 250 | 50 | 1350 | 1600 | 1100 | |
| MPH252012C3R3□T | 3.3 | 1 | 312 | 250 | 50 | 1050 | 1250 | 1100 | |
| MPH252012C4R7□T | 4.7 | 1 | 500 | 400 | 35 | 680 | 800 | 900 | |
| MPH252012C6R8□T | 6.8 | 1 | 625 | 500 | 30 | 630 | 750 | 800 | |
| MPH252012C100□T | 10.0 | 1 | 625 | 500 | 25 | 420 | 500 | 800 | |

※□: Please specify the inductance tolerance code (M=±20%, N=±30%);


※Rated current: Isat or Irms, whichever is smaller;

※Isat: DC current at which the inductance drops approximate 30% from its value without current;




※Irms : DC current that causes the temperature rise ($\Delta T = 40^{\circ}C$) from $20^{\circ}C$ ambient.

TYPICAL ELECTRICAL CHARACTERISTICS

Inductance vs. Frequency Characteristics

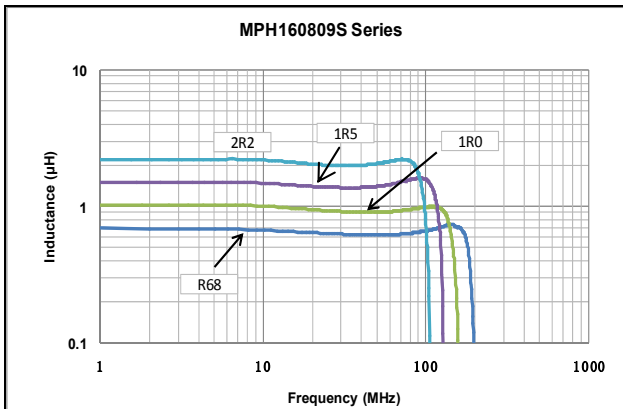


Inductance vs. DC Current Characteristics





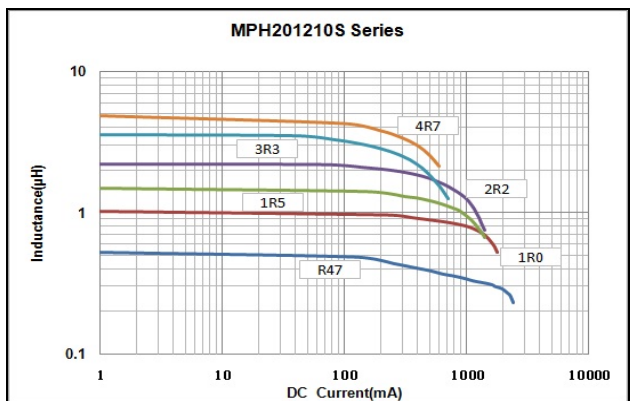
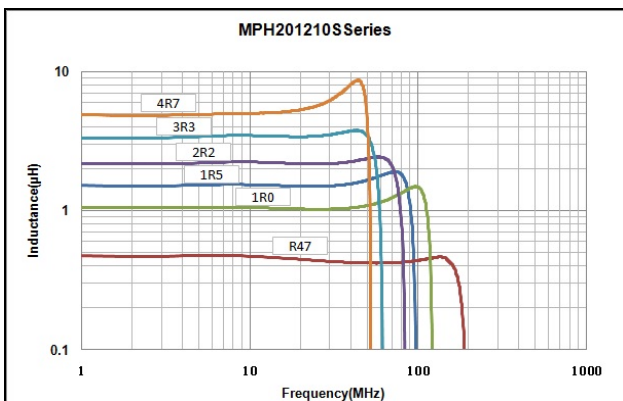
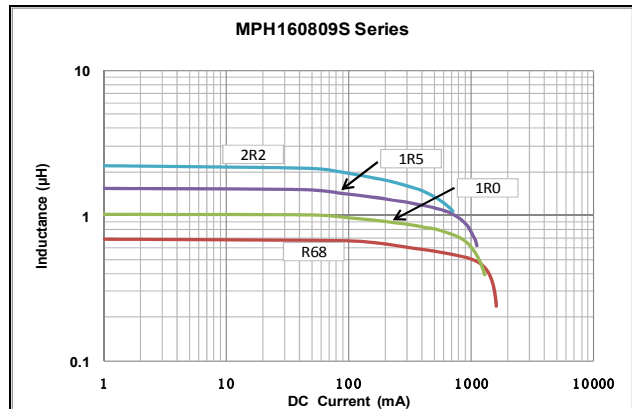


TYPICAL ELECTRICAL CHARACTERISTICS

Inductance vs. Frequency Characteristics

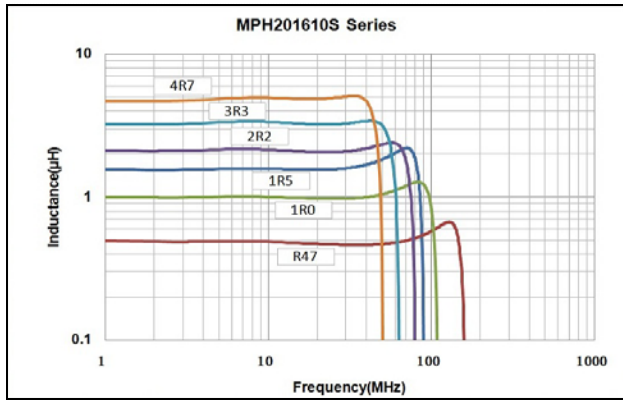

Inductance vs. DC Current Characteristics

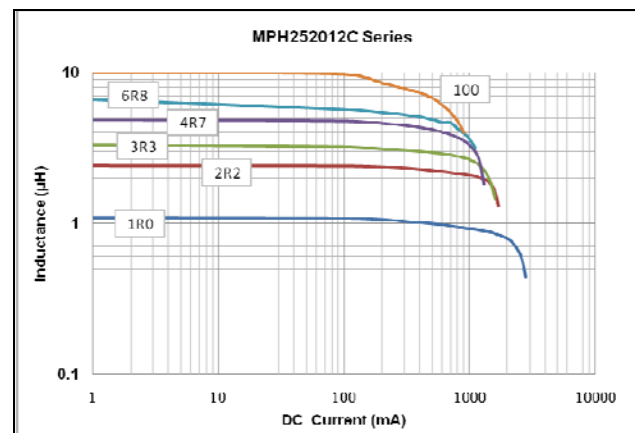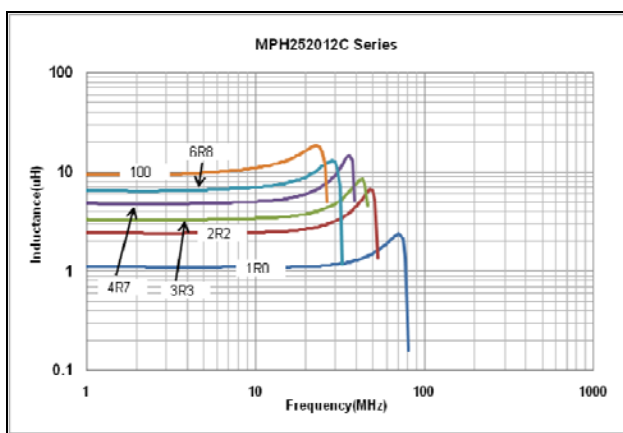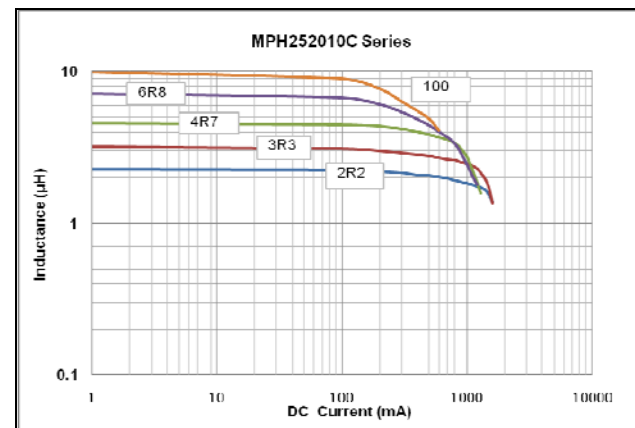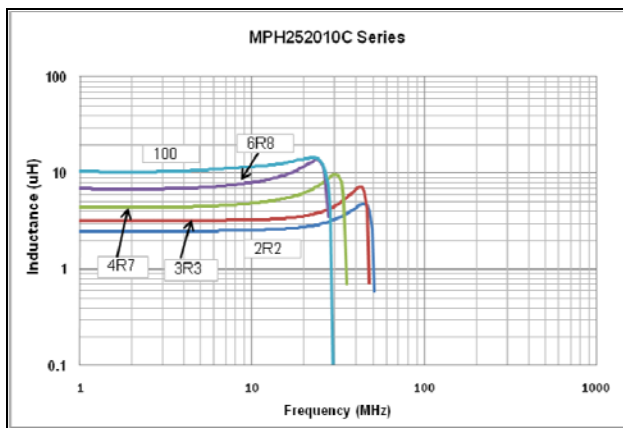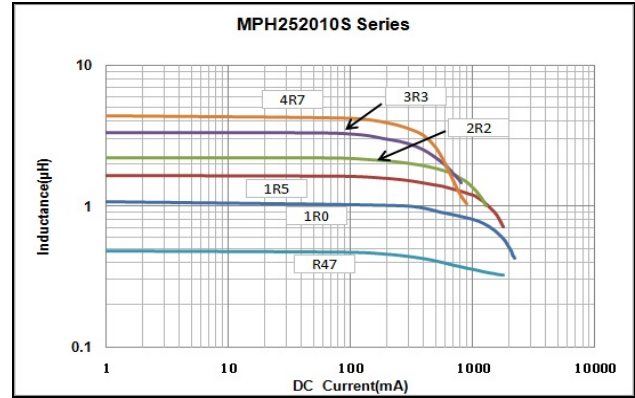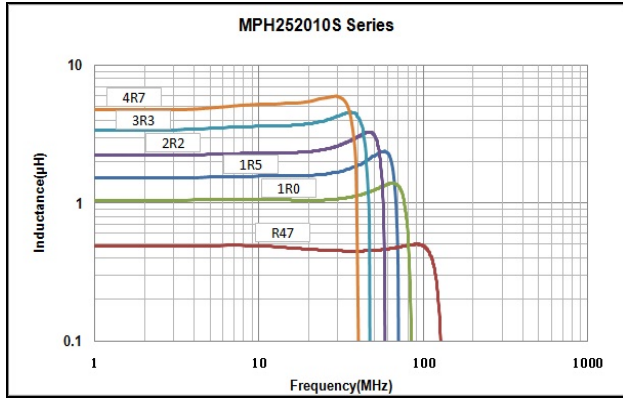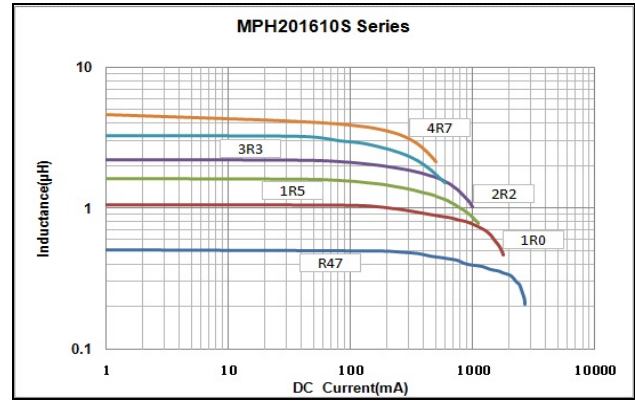

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)