


Wire Wound Chip Common Mode Choke Coil – SDCW Series

Operating Temp. : -40°C~+85°C



FEATURES

- Winding type realizes small size and low profile
- Prevention of common mode noise at high frequency
- 30Ω~2200Ω are optional for different noise level and signal frequency
- Excellent solderability

APPLICATIONS


- USB2.0 of PC, peripheral equipments, small digital AV equipments, etc.
- LVDS lines of Note PC, LCD
- Audio lines

PRODUCT IDENTIFICATION

| <u>SDCW</u> ① | <u>2012</u> ② | <u>-2</u> ③ | <u>-900</u> ④ | <u>T</u> ⑤ | <u>F</u> ⑥ | | | | | | | |
|---|------------------|----------------|---|--|--|--------------------------------|--------------------------|----------------------------|---|--|--------------------------------------|---|
| ① | ② | ③ | ④ | ⑤ | ⑥ | | | | | | | |
| <table border="1"> <tr><th>Type</th></tr> <tr><td>Winding Type Common Mode Choke Coil</td></tr> </table> | | Type | Winding Type Common Mode Choke Coil | <table border="1"> <tr><th>External Dimensions (L×W) (mm)</th></tr> <tr><td>2012 [0805] 2.0×1.2</td></tr> <tr><td>3216 [1206] 3.2×1.6</td></tr> </table> | | External Dimensions (L×W) (mm) | 2012 [0805] 2.0×1.2 | 3216 [1206] 3.2×1.6 | <table border="1"> <tr><th>Number of Lines</th></tr> <tr><td>2</td></tr> </table> | | Number of Lines | 2 |
| Type | | | | | | | | | | | | |
| Winding Type Common Mode Choke Coil | | | | | | | | | | | | |
| External Dimensions (L×W) (mm) | | | | | | | | | | | | |
| 2012 [0805] 2.0×1.2 | | | | | | | | | | | | |
| 3216 [1206] 3.2×1.6 | | | | | | | | | | | | |
| Number of Lines | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | |
| <table border="1"> <tr><th>Impedance</th></tr> <tr><td>Example Nominal Value</td></tr> <tr><td>900 90Ω</td></tr> </table> | | Impedance | Example Nominal Value | 900 90Ω | <table border="1"> <tr><th>Packing</th></tr> <tr><td>T Tape & Reel</td></tr> </table> | | Packing | T Tape & Reel | <table border="1"> <tr><th>Hazardous Substance Free Products</th></tr> <tr><td>F</td></tr> </table> | | Hazardous Substance Free Products | F |
| Impedance | | | | | | | | | | | | |
| Example Nominal Value | | | | | | | | | | | | |
| 900 90Ω | | | | | | | | | | | | |
| Packing | | | | | | | | | | | | |
| T Tape & Reel | | | | | | | | | | | | |
| Hazardous Substance Free Products | | | | | | | | | | | | |
| F | | | | | | | | | | | | |


SHAPE AND DIMENSIONS

SDCW2012 Type

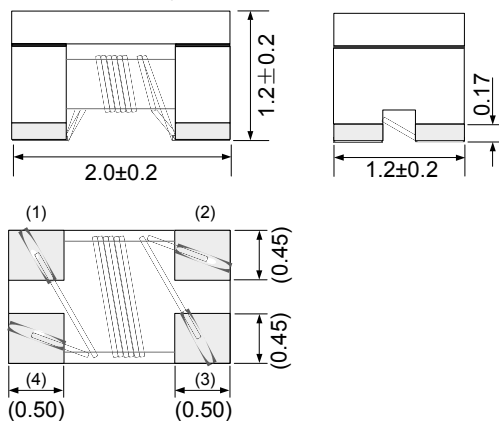

Recommended Land Pattern

Unit: mm




SHAPE AND DIMENSIONS




Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15

SDCW3216 Type

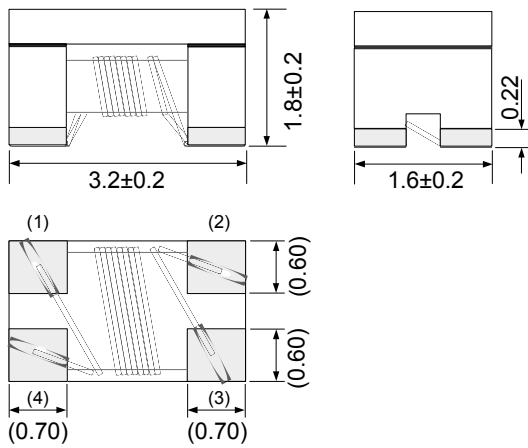

Recommended Land Pattern

Unit: mm



SPECIFICATIONS

SDCW2012 TYPE

| Part Number | Common Mode Impedance @100MHz | Max. DC Resistance | Max. Rated Current | Rated Voltage | Min. Insulation Resistance |
|------------------|-------------------------------|--------------------|--------------------|-----------------|----------------------------|
| Units | Ω | Ω | mA | Volts | M Ω |
| Symbol | Z | DCR | I _r | V _{DC} | IR |
| SDCW2012-2-300TF | 30±25% | 0.20 | 450 | 50 | 10 |
| SDCW2012-2-670TF | 67±25% | 0.25 | 400 | 50 | 10 |
| SDCW2012-2-900TF | 90±25% | 0.35 | 330 | 50 | 10 |
| SDCW2012-2-121TF | 120±25% | 0.30 | 370 | 50 | 10 |
| SDCW2012-2-181TF | 180±25% | 0.35 | 330 | 50 | 10 |
| SDCW2012-2-201TF | 200±25% | 0.40 | 300 | 50 | 10 |
| SDCW2012-2-221TF | 220±25% | 0.40 | 300 | 50 | 10 |
| SDCW2012-2-261TF | 260±25% | 0.40 | 300 | 50 | 10 |
| SDCW2012-2-361TF | 360±25% | 0.45 | 280 | 50 | 10 |
| SDCW2012-2-371TF | 370±25% | 0.45 | 280 | 50 | 10 |
| SDCW2012-2-601TF | 600±25% | 0.55 | 200 | 50 | 10 |
| SDCW2012-2-751TF | 750±25% | 0.70 | 180 | 50 | 10 |
| SDCW2012-2-901TF | 900±25% | 0.80 | 150 | 50 | 10 |
| SDCW2012-2-102TF | 1000±25% | 0.80 | 150 | 50 | 10 |

SDCW3216 TYPE

| Part Number | Common Mode Impedance @100MHz | Max. DC Resistance | Max. Rated Current | Rated Voltage | Min. Insulation Resistance |
|------------------|-------------------------------|--------------------|--------------------|-----------------|----------------------------|
| Units | Ω | Ω | mA | Volts | M Ω |
| Symbol | Z | DCR | I _r | V _{DC} | IR |
| SDCW3216-2-900TF | 90±25% | 0.30 | 370 | 50 | 20 |
| SDCW3216-2-161TF | 160±25% | 0.40 | 340 | 50 | 10 |
| SDCW3216-2-261TF | 260±25% | 0.50 | 310 | 50 | 10 |
| SDCW3216-2-601TF | 600±25% | 0.80 | 260 | 50 | 10 |
| SDCW3216-2-102TF | 1000±25% | 1.00 | 230 | 50 | 10 |
| SDCW3216-2-222TF | 2200±25% | 1.20 | 200 | 50 | 10 |


※: Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.

EQUIVALENT CIRCUIT



Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15


Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

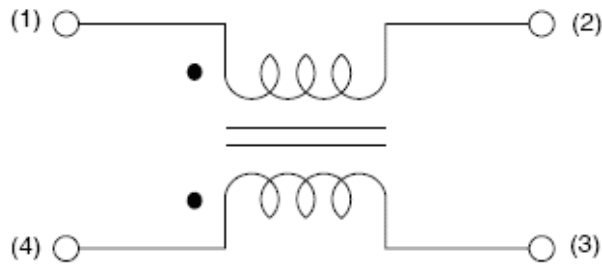


TYPICAL ELECTRICAL CHARACTERISTICS

Impedance vs. Frequency


SDCW2012 TYPE
(30~360Ω)

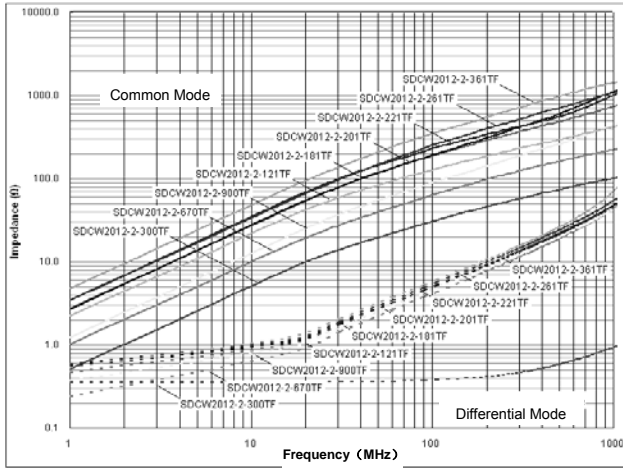

SDCW2012 TYPE
(370~1000Ω)

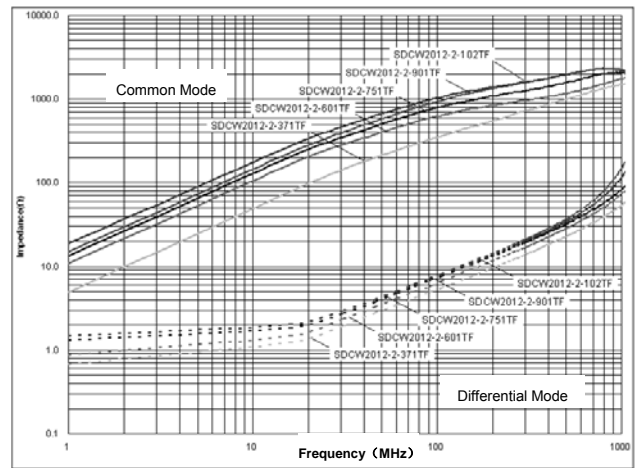

SDCW3216 TYPE
(90~2200Ω)

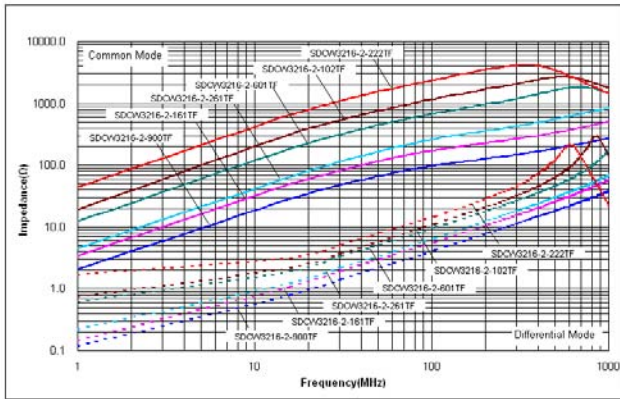

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[RGCMF1210900H3T](#) [B82722A2102N001](#) [UAL21V07012500](#) [UAL24VR06500CH](#) [UALSC0220G0000](#) [UALSC058000000](#)
[UALSC0580J0000](#) [UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU10VR20010](#) [UALSU16VD30030](#) [UALSU16VD40010](#)
[UALSU9H0305000](#) [UALSU9HF030600](#) [UALSU9HF060300](#) [UALSU9HR050340](#) [UALSU9VD070100](#) [UALSU9VR070170](#) [5701610000](#)
[CM7060M132R-10](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9V0701000](#) [UALSU9HR030900](#)
[UALSU9HF050500](#) [UALSU9H0701000](#) [UALSU9H0208000](#) [UALSU9H0110000](#) [UALSCF25081300](#) [UALSC0305GS000](#)
[UALSC0120G0000](#) [UAL24VK06450CH](#) [UAL11VL1105000](#) [RN112-3.6-02-0M4](#) [RN114-1.2-02-10M](#) [RN122-0.6-02-47M](#) [RN122-3-02-4M5](#)
[RN142-1-02-33M](#) [RN214-2.5-02-3M3](#) [RN112-2-02-1M0](#) [RN143-6-02-1M8](#) [RN214-0.8-02-27M](#) [RN242-1.4-02-27M](#) [EXC-X4CH120X](#)
[DLW5BTM102TQ2L](#) [CMF16-153131](#) [CMF23H-273141](#) [744252510](#) [B82793C0253N201](#)