


Multilayer Chip Antenna – SLDA Series

Operating Temp. : -40°C~+85°C



FEATURES

- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

APPLICATIONS

- Bluetooth, Wireless LAN, Mobile TV
- Home RF system, etc
- RFID


PRODUCT IDENTIFICATION

<u>SLDA</u> ①	<u>31</u> ②	<u>-2R800G</u> ③	<u>-S1</u> ④	<u>I</u> ⑤	<u>F</u> ⑥																																				
①	②	③	④	⑤	⑥																																				
<table border="1"> <thead> <tr> <th colspan="2">Type</th> </tr> </thead> <tbody> <tr> <td>SLDA</td> <td>Multilayer Chip Antenna</td> </tr> </tbody> </table>	Type		SLDA	Multilayer Chip Antenna	<table border="1"> <thead> <tr> <th colspan="2">(L×W) (mm)</th> </tr> <tr> <th colspan="2">External Dimensions (L×W) (mm)</th> </tr> </thead> <tbody> <tr> <td>21</td> <td>2.0×1.2</td> </tr> <tr> <td>31</td> <td>3.2×1.6</td> </tr> <tr> <td>52</td> <td>5.2×2.1</td> </tr> <tr> <td>62</td> <td>6.0×2.0</td> </tr> <tr> <td>72</td> <td>7.0×2.0</td> </tr> <tr> <td>81</td> <td>8.0×1.0</td> </tr> <tr> <td>92</td> <td>9.0×2.0</td> </tr> </tbody> </table>	(L×W) (mm)		External Dimensions (L×W) (mm)		21	2.0×1.2	31	3.2×1.6	52	5.2×2.1	62	6.0×2.0	72	7.0×2.0	81	8.0×1.0	92	9.0×2.0	<table border="1"> <thead> <tr> <th colspan="2">Center Frequency</th> </tr> <tr> <th>Example</th> <th>Nominal Value</th> </tr> </thead> <tbody> <tr> <td>2R800G</td> <td>2800.0MHz</td> </tr> <tr> <td>2R470G</td> <td>2470.0MHz</td> </tr> </tbody> </table>	Center Frequency		Example	Nominal Value	2R800G	2800.0MHz	2R470G	2470.0MHz	<table border="1"> <thead> <tr> <th>Series Code</th> </tr> </thead> <tbody> <tr> <td>S1, 01, etc.</td> </tr> </tbody> </table>	Series Code	S1, 01, etc.	<table border="1"> <thead> <tr> <th>Packing</th> </tr> </thead> <tbody> <tr> <td>T Tape & Reel</td> </tr> </tbody> </table>	Packing	T Tape & Reel	<table border="1"> <thead> <tr> <th>Hazardous Substance Free Products</th> </tr> </thead> <tbody> <tr> <td>F</td> </tr> </tbody> </table>	Hazardous Substance Free Products	F
Type																																									
SLDA	Multilayer Chip Antenna																																								
(L×W) (mm)																																									
External Dimensions (L×W) (mm)																																									
21	2.0×1.2																																								
31	3.2×1.6																																								
52	5.2×2.1																																								
62	6.0×2.0																																								
72	7.0×2.0																																								
81	8.0×1.0																																								
92	9.0×2.0																																								
Center Frequency																																									
Example	Nominal Value																																								
2R800G	2800.0MHz																																								
2R470G	2470.0MHz																																								
Series Code																																									
S1, 01, etc.																																									
Packing																																									
T Tape & Reel																																									
Hazardous Substance Free Products																																									
F																																									

SHAPE AND DIMENSIONS

Type:	Dimensions (mm)
Type: SLDA21-2R450G-S1TF	Land Pattern (mm)


SHAPE AND DIMENSIONS

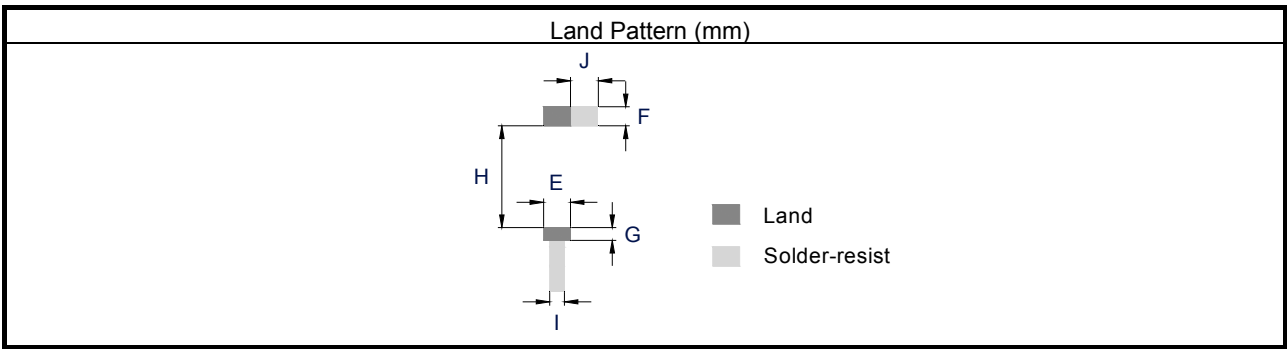

SHAPE AND DIMENSIONS


Series	A	B	C	D	E	F	G	H	I	J
SLDA21	2.0±0.2	1.25±0.2	0.85±0.2	0.5±0.2	1.0±0.2	1.0±0.2	1.5±0.2	-	-	-
SLDA31	3.2±0.2	1.6±0.2	1.2±0.2	0.5±0.2	1.6±0.2	0.8±0.2	0.8±0.2	2.6±0.2	1.4	1.6±0.2
SLDA31-3R4 00G-S1TF	3.2±0.2	1.6±0.2	0.77±0.03	0.5±0.2	1.6±0.2	0.8±0.2	0.8±0.2	2.6±0.2	1.4	1.6±0.2
SLDA52	5.2±0.2	2.1±0.2	1.0±0.2	0.5±0.2	2.3±0.2	1.5±0.2	1.0±0.2	4.0±0.2	1.4	2.3±0.2
SLDA62	6.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	5.0±0.2	1.4	2.2±0.2
SLDA72	7.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	6.0±0.2	1.4	2.2±0.2
SLDA81	8.0±0.2	1.0±0.2	1.0±0.2	0.5±0.2	1.5±0.2	1.5±0.2	1.0±0.2	7.0±0.2	1.4	1.5±0.2
SLDA92	9.0±0.2	2.0±0.2	1.0±0.2	0.5±0.2	2.2±0.2	1.5±0.2	1.0±0.2	8.0±0.2	1.4	2.2±0.2

TERINAL-CONFIGURATION




No.	Terminal Name	No.	Terminal Name
(1)	Feeding Point	(2)	NC

EVALUATION BOARD

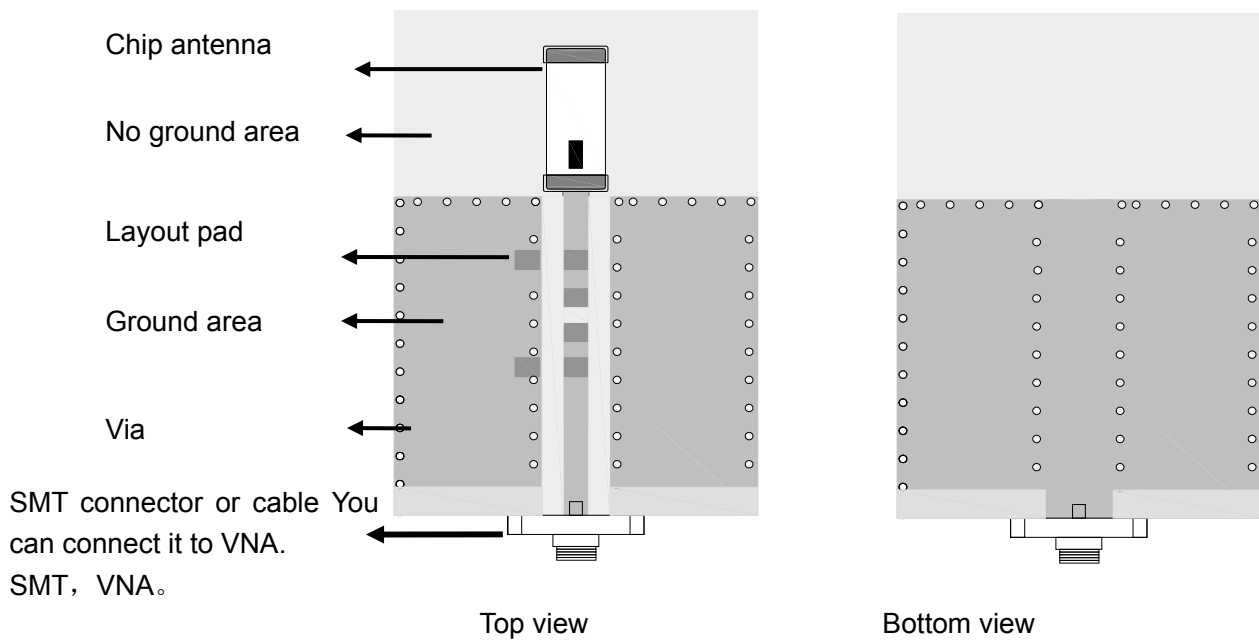

APPLICATION GUIDE

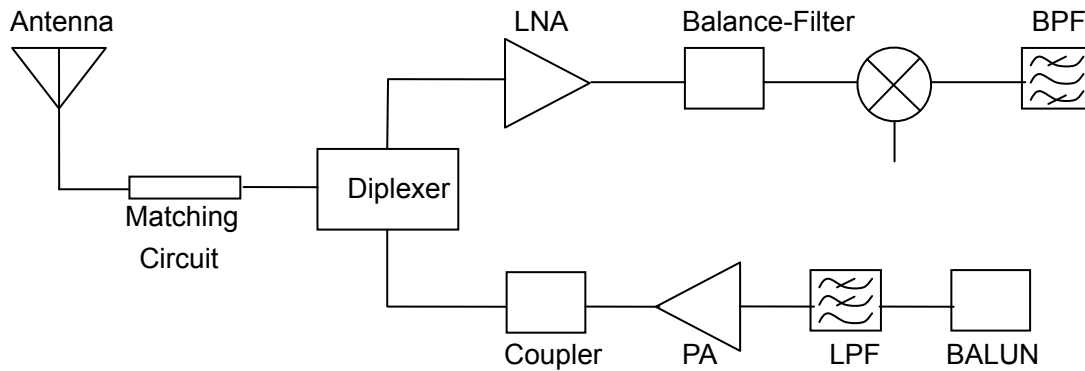

SPECIFICATIONS

SLDA21 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA21-2R450G-S1TF	≥ 100	1.0dBi Typ.	-3.0dBi Typ.	< 2.5	50	3

SLDA31 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA31-2R800G-S1TF	≥ 100	0.5dBi Typ.	-1dBi Typ.	< 2	50	3
SLDA31-2R400G-S1TF	≥ 100	2.5dB @ (XZ-total)	-1.5dB @ (XZ-total)	< 2	50	2
SLDA31-2R400G-S2TF	≥ 100	2.5dBi @ (XZ-total)	0.5dBi @ (XZ-total)	< 2	50	2
SLDA31-2R400G-S4TF	≥ 100	2.5dBi @ (XZ-total)	-0.5dBi @ (XZ-total)	< 2	50	2
SLDA31-3R400G-S1TF	≥ 100	0.5dBi Typ.	-1dBi Typ.	< 2	50	3

SLDA52 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA52-2R350G-S1TF	≥ 150	2.5dBi Typ.	0.5dBi Typ.	< 2	50	3
SLDA52-2R510G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R540G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R710G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	
SLDA52-2R780G-S1TF	≥ 200	2.5dBi Typ.	0.5dBi Typ.	< 2	50	

SLDA62 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA62-2R640G-01TF	≥ 200	2.6dBi Typ.	0.7dBi Typ.	< 2	50	3

SLDA72 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA72-2R470G-S1TF	≥ 200	2.7dBi Typ.	1.0dBi Typ.	< 2	50	3
SLDA72-2R860G-02TF	≥ 200	2.7dBi Typ.	1.0dBi Typ.	< 2	50	

Sunlord

Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15

Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110 Tel: 0086-755-29832660 Fax: 0086-755-82269029 E-Mail: sunlord@sunlordinc.com

SPECIFICATIONS

SLDA81 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA81-3R010G-S1TF	≥ 200	2.0dBi Typ.	0.5dBi Typ.	< 2	50	3


SLDA92 TYPE

Part Number	Band Width	Peak Gain	Average Gain	VSWR	Impedance	Power Capacity
	MHz	V-XZ	V-XZ	In BW	Ω	W
SLDA92-2R450G-S2TF	≥ 150	2.0dBi typ	1.0 dBi typ	< 2	50	3
SLDA92-2R660G-S1TF	≥ 200	3.0dBi Typ.	1.0dBi Typ.	< 2	50	3


※Frequency will be changed with layout of PCB. Please contact us for appropriate design.

RETURN LOSS


SLDA21-2R450G-S1TF

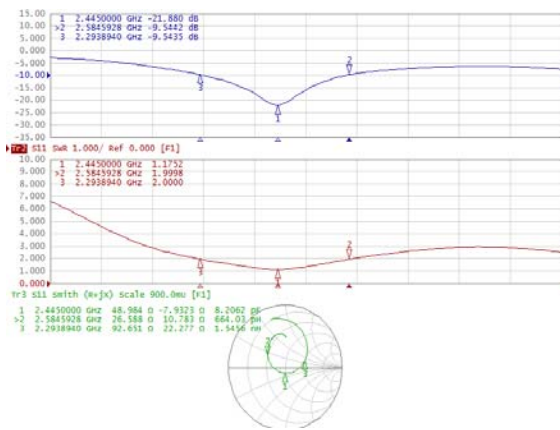


SLDA31-2R800G-S1TF

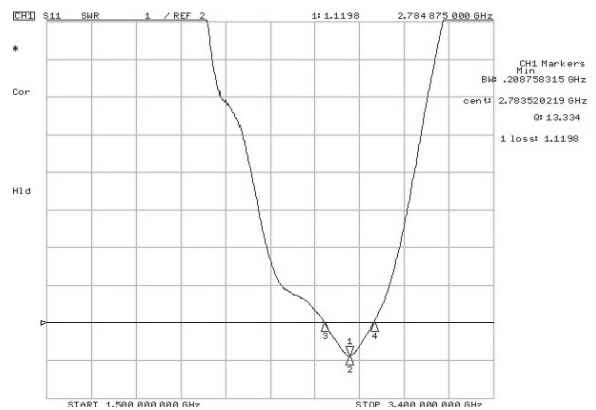


SLDA31-2R400G-S1TF

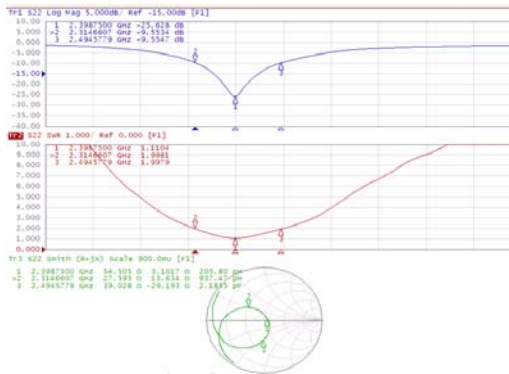


SLDA31-2R400G-S2TF

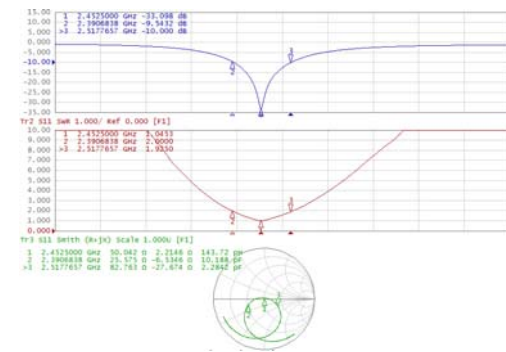

SLDA31-2R400G-S4TF

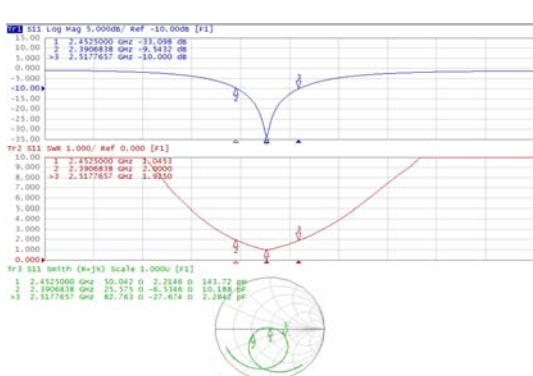


SLDA31-3R400G-S1TF

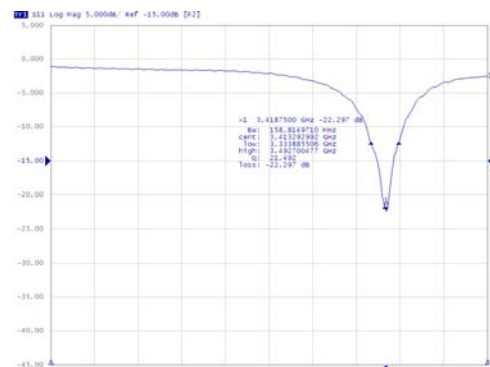


Specifications subject to change without notice. Please check our website for latest information. Revised 2018/04/15

RETURN LOSS


SLDA52-2R350G-S1TF

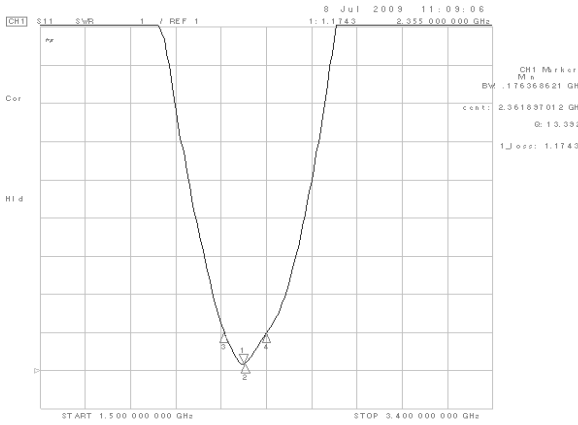


SLDA52-2R510G-S1TF

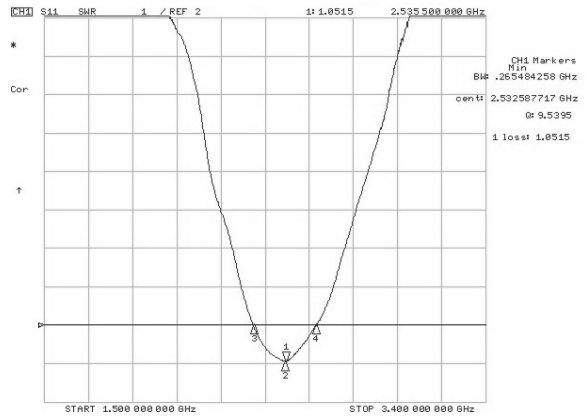


SLDA52-2R540G-S1TF

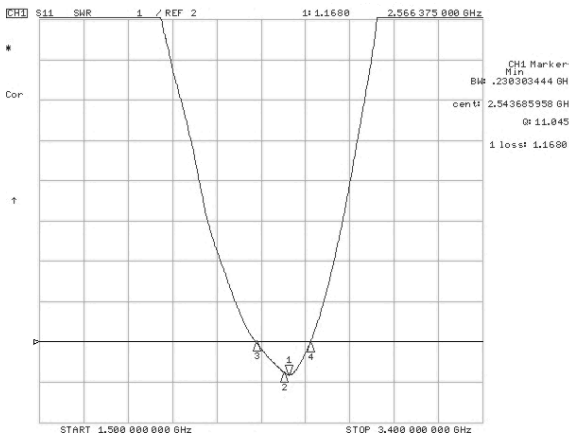


SLDA52-2R710G-S1TF

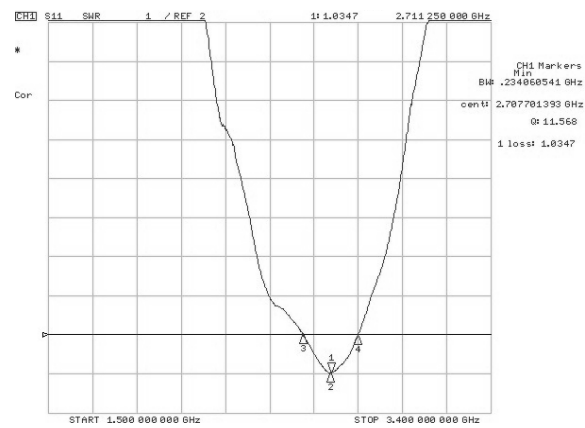

SLDA52-2R780G-S1TF

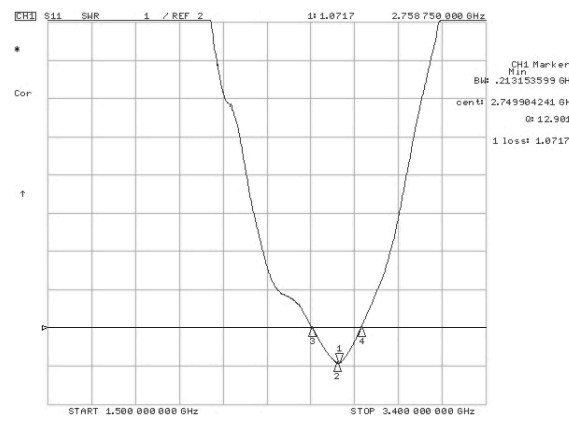


SLDA62-2R640G-01TF

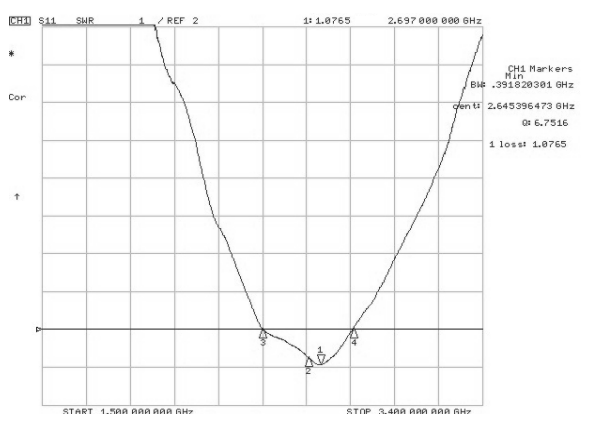

SLDA72-2R470G-S1TF




SLDA72-2R860G-02TF

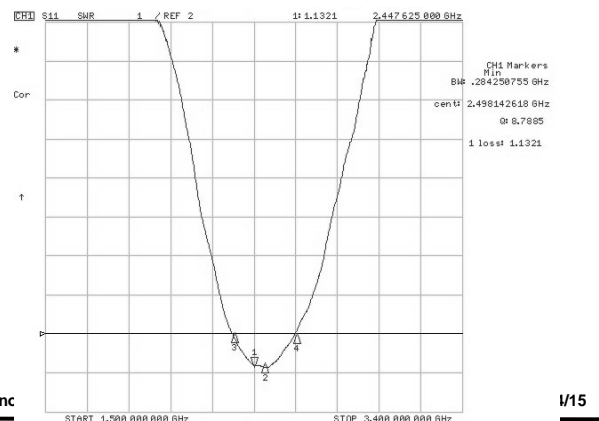


RETURN LOSS


SLDA81-3R010G-S1TF

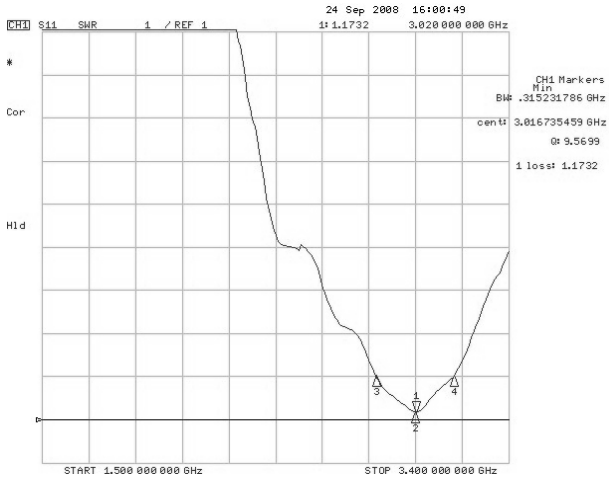


SLDA92-2R450G-S2TF

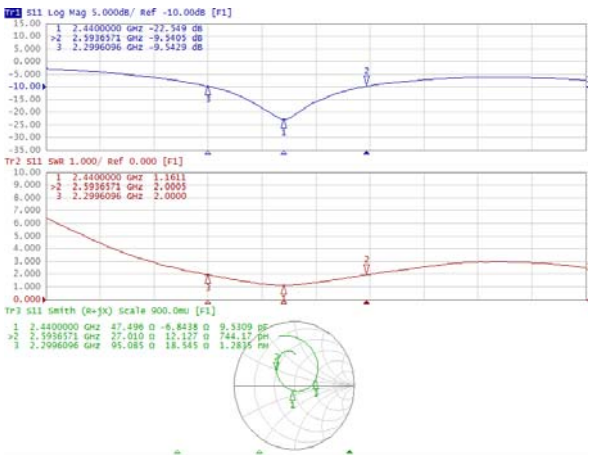


SLDA92-2R660G-S1TF

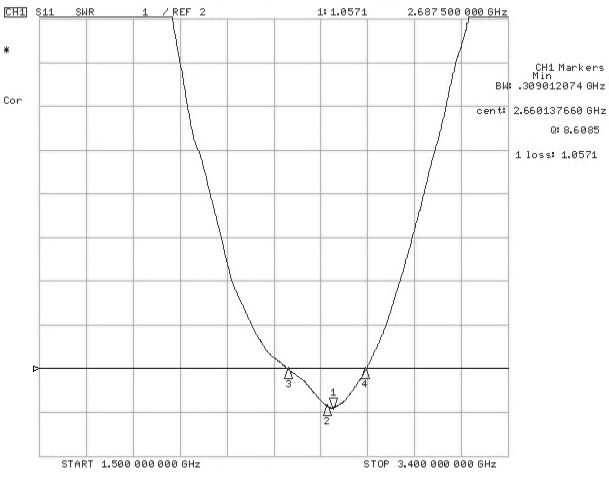


SLDA12040-0R433G-S1TF1TF

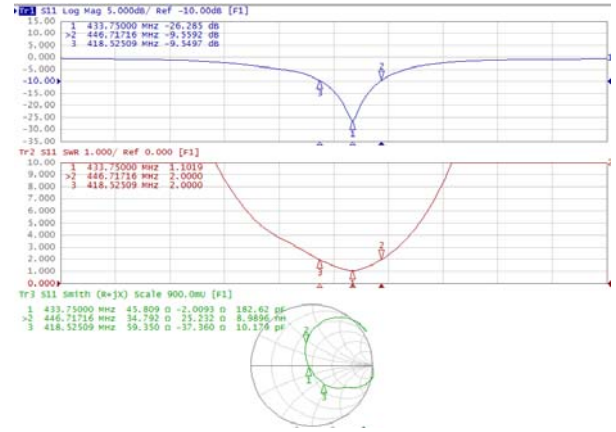

SLDA16030-0R433G-S1TF

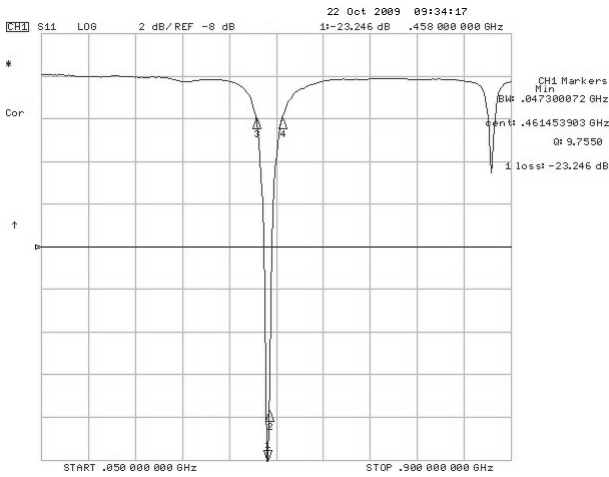

SLDA35050-0R650G-S1TF

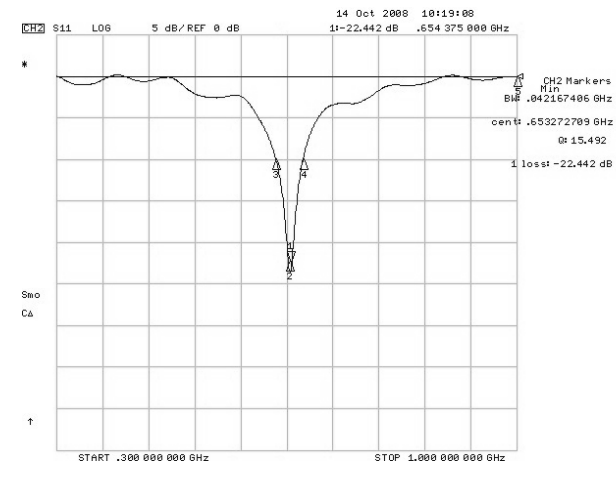

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Sunlord](#) manufacturer:

Other Similar products are found below :

[CCT FM1](#) [ABFT](#) [AD-NM-SMAF 001-0021](#) [CTC110](#) [MAF94149](#) [EXE902SF](#) [MMCX-SMA-100](#) [PDQ24496-91NF](#) [GAN30084EU](#) [930-033-R](#) [A08-HABUF-P5I](#) [AAF95035](#) [DG-ANT-20DP-BG-B](#) [APAMPGJ-141](#) [1513563-1](#) [OF86315-FNF](#) [OP24516DS-91NM](#) [A09-HASM-7](#) [EXE902MD](#) [EXE902SM](#) [SPDA17806/2170LAR](#) [APAMPG-117](#) [GPS1575SP26-004](#) [GPS15MGSMA](#) [CMD69273P-30NF](#) [CMQ69273-30NF](#) [RD2458-5-OTDR-NM](#) [RD2458-5-RSMA](#) [TRAB24/49003](#) [W4120ER5000](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [SPDA17RP918](#) [OP24516SX-91NM](#) [OP24516SX-91RSMM](#) [CMQ69273P-30NF](#) [CMS69273-30NF](#) [CMS69273P-30NF](#) [TRAB24003N](#) [TRAB24003NP](#) [TRAB8213NP](#) [TRAB8903](#) [A09-Y8NF](#) [A09-Y11NF](#) [A09-HSM-7](#) [A09-F8NF-M](#) [A09-F5NF-M](#)