

SAW Single Filter

for B3 / Unbalanced / 5pin /1109

Pinnacle PN: SA0311091G84AT

Key Feature:

- ✓ **LTE B3 RX**
- ✓ **Low Inband Insertion Loss**

1 Description

SA0311091G84AT is a high-performance Surface Acoustic Wave (SAW) Bandpass filter optimized for FDD LTE B3 applications operating in the range of 1.805 GHz -1.880 GHz. It is designed to provide both low insertion loss in Band 3 and high rejection in the adjacent cellular Bands for mobile devices.

SA0311091G84AT uses advanced Chip Scale Package (CSP) technology and is housed in an industry-standard, 5-pin 1.1mm x 0.9mm package with a low profile of 0.6mm max.

2 Features

- High Attenuation in Tx band
- Low Inband Insertion Loss
- Small Footprint: $0.25 \pm 0.03\text{mm} \times 0.20 \pm 0.03\text{mm}$.
- Package size $1.1 \pm 0.05\text{mm} \times 0.9 \pm 0.05\text{mm}$
- Electrostatic Sensitive Device(ESD)
- Package height 0.6mm max.
- Single-Ended Operation
- RoHS Compliant

3 Package & Dimensions:

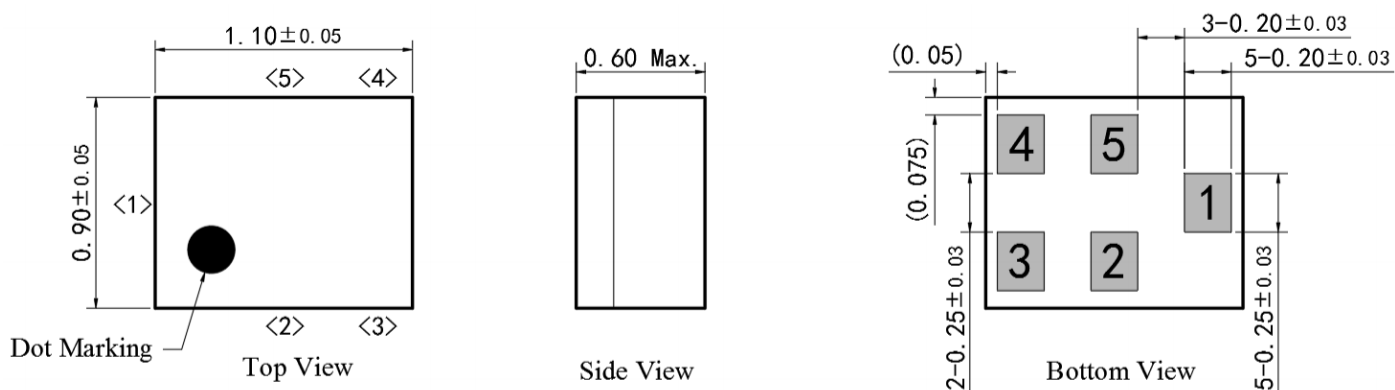


Figure 1: Drawing of Package with each tolerance range

4 Pin configuration

- 1 Input (recommended)
- 4 Output (recommended)
- 2,3,5 To be grounded

5 Matching Circuit(recommended)

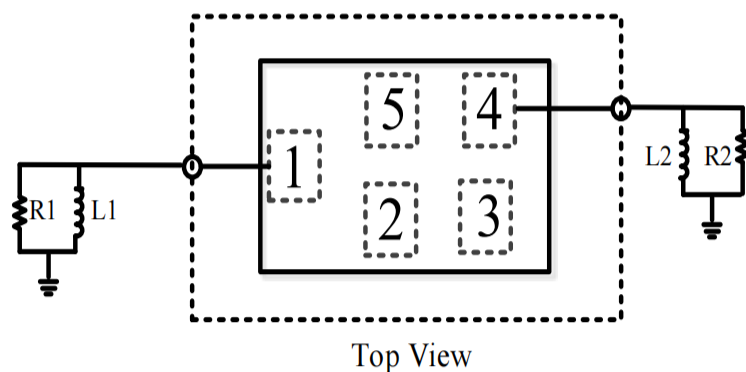


Figure 2: Schematic of matching circuit.

R1: 50 Ohm	L1: 7.5 nH (Q \approx 30 @ 1842.5MHz)
R2: 50 Ohm	L2: 7.5 nH (Q \approx 30 @ 1842.5MHz)

6 Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Temperature	-30 to +85	°C
Storage Temperature	-40 to +85	°C
Maximum Input Power	+15	dBm
Maximum DC Voltage	5	V
Input terminating impedance	50	Ω
Output terminating impedance	50	Ω
Input Power@input port	Pin=15dBm Continuous wave for 2000h@55° C	

7 Recommended Soldering Profile

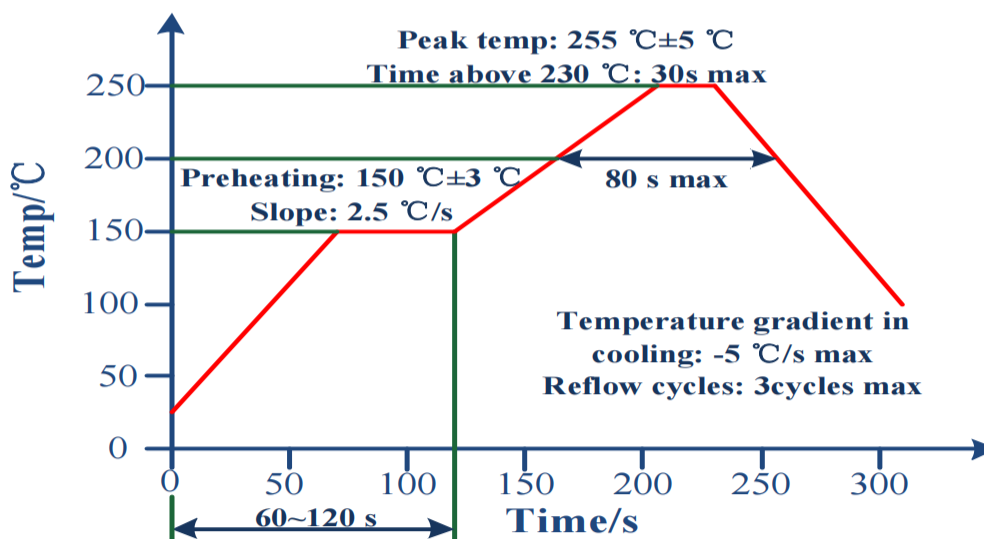


Figure 12: Recommended Reflow profile for convection and infrared soldering-lead-free solder.

8 Electrical Specifications

Parameter	Conditions	Min	Typ.	Max	Unit	Note
Insertion Loss	1805 - 1880 MHz	-	1.8	2.8	dB	
Attenuation	100 - 1710 MHz	33	37	-	dB	
	1710 - 1755 MHz	35	42	-	dB	
	1755 - 1785 MHz	30	35	-	dB	
	1920 - 2400 MHz	18	25	-	dB	
	2400- 4000 MHz	30	35	-	dB	
VSWR (input)	1805 - 1880 MHz	-	1.8	2.0	-	
VSWR (output)	1805 - 1880 MHz	-	1.5	2.0	-	

9 Transmission coefficient


Figure 3: |S21|

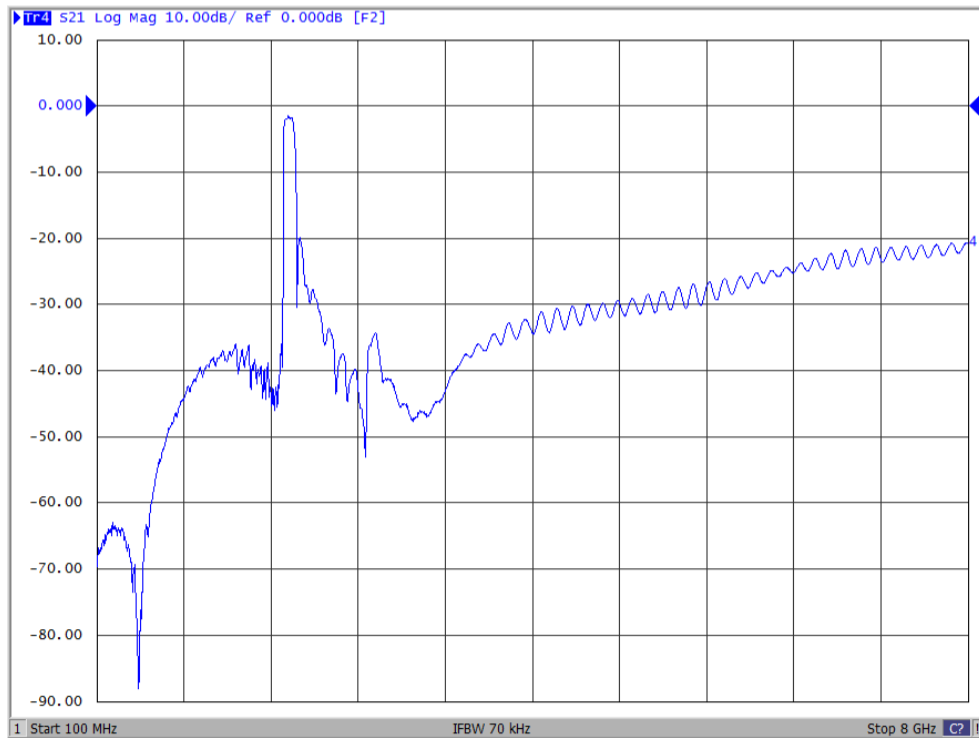


Figure 4: Wide Band |S21|

10 Reflection coefficients

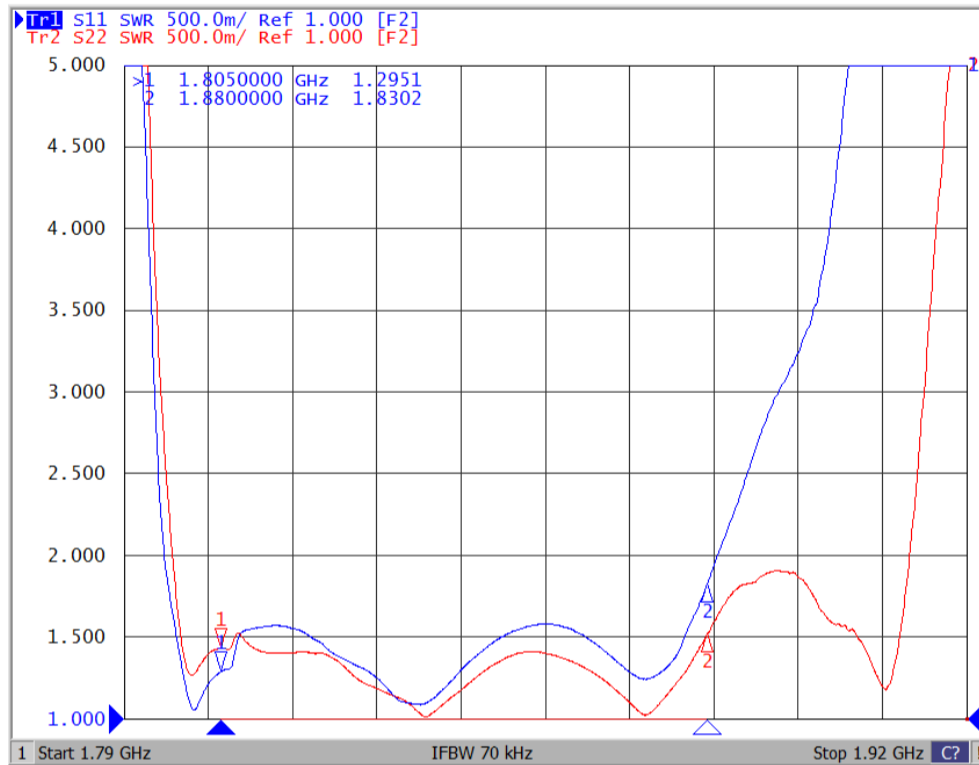


Figure 5: VSWR (Port1: blue line; Port 2: red line)

11 Packing material

11.1 Tape

Tensile Strength of Carrier Tape: Carrier tape 10N or more; Cover tape 5N or more. Packaging quantities: 5000 PCS / Reel.

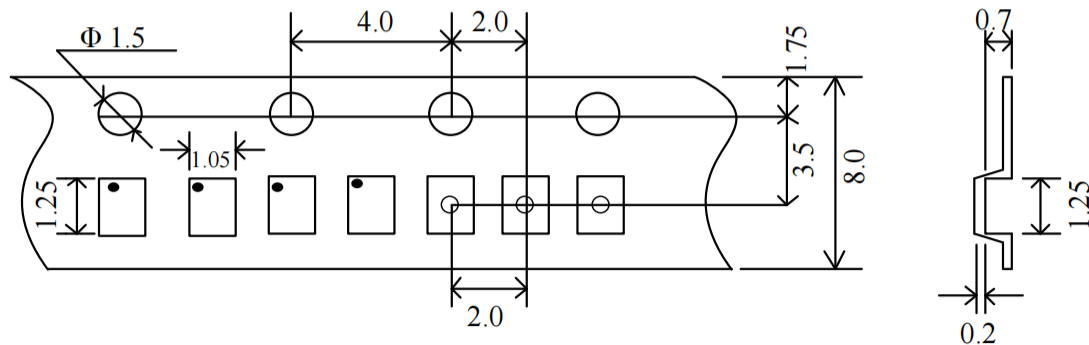


Figure 6: Drawing of tape with tape dimensions according above.

11.2 Reel with diameter of 178mm

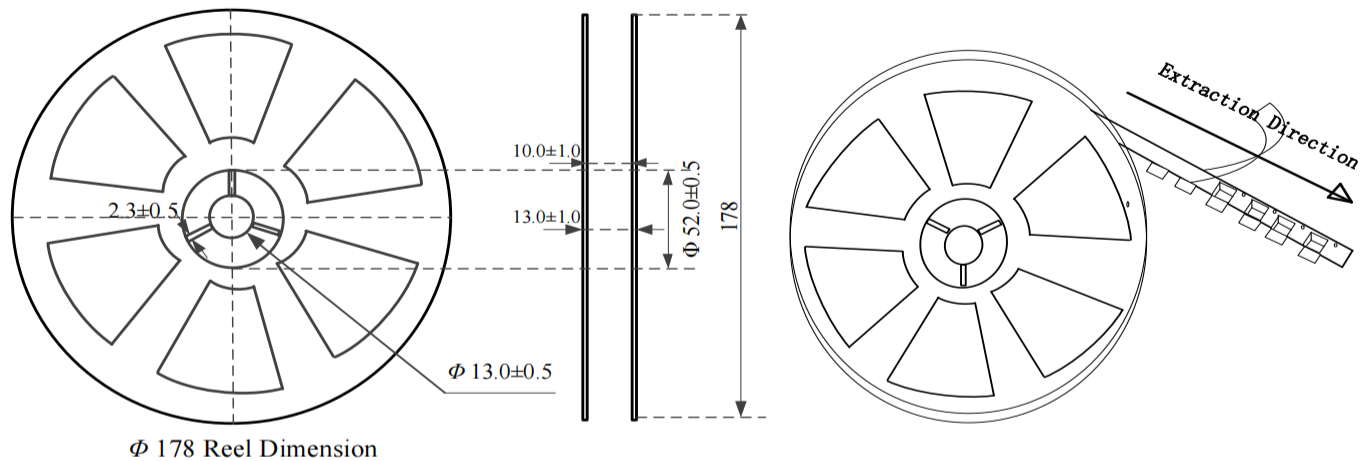


Figure 7: Drawing of reel with diameter of 178mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Sunltech](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)
[B39242B4360P810](#) [B39781B8005P810](#)