

Multilayer Chip Ferrite Inductor



◆ **Features**

- 1、 Monolithic structure for high reliability
- 2、 Compact size inductor possible
- 3、 No cross coupling due to magnetic shield
- 4、 Perfect shape for mounting with no directionality
- 5、 Excellent solderability and high heat resistance for reflow soldering or wave soldering
- 6、 RoHS Compliant.



◆ **Application**

Widely use in Communications, Video and audio equipment, Computer, Remote control, etc.


◆ **PRODUCT IDENTIFICATION**

SCL 1608 S 1R0 M S P
(1) (2) (3) (4) (5) (6) (7)

- (1) Series Type
- (2) Chip Size (mm) :Length X Width
- (3) Material Code
- (4) Inductance: 47N=0.047μH; R10=0.10μH
1R0=1.0μH; 100=10μH
- (5) Inductance Tolerance: K=±10%, M=±20%
- (6) Company Code
- (7) Packaging:P–Embossed paper tape, 7" reel
E- Embossed plastic tape, 7" reel

◆ **Dimensions** Unit: mm

| Size(EIA) | 1005 (0402) | 1608 (0603) | 2012 (0805) | 3216 (1206) |
|-----------|----------------|----------------|----------------|----------------|
| L | 1.00±0.10 | 1.60±0.150 | 2.00±0.20 | 3.20±0.20 |
| W | 0.50±0.10 | 0.80±0.150 | 1.25±0.20 | 1.60±0.20 |
| T | 0.50±0.10 | 0.80±0.150 | 0.90±0.20 | 1.10±0.20 |
| E | 0.25±0.10 | 0.30±0.20 | 0.50±0.30 | 0.50±0.30 |

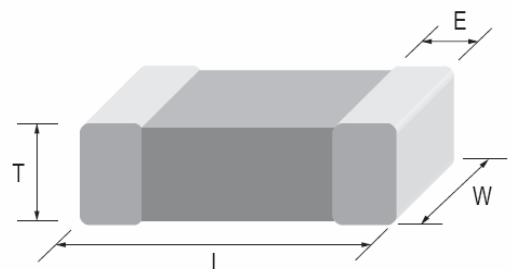

◆ Specifications

| Part Number | Inductance (μH) | Min. Quality Factor (Q) | L, Q Test Freq.L/Q Freq. (MHz) | Min.Self-resonant Frequency S.R.F.(MHz) | Max. DC Resistance DCR(Ω) | Max. Rated Current Ir(mA) |
|------------------------|-----------------|-------------------------|--------------------------------|---|---------------------------|---------------------------|
| SCL 1005 Series | | | | | | |
| SCL 1005L47NKSP | 0.047 | 10 | 50 | 220 | 0.45 | 25 |
| SCL 1005L68NKSP | 0.068 | 10 | 50 | 210 | 0.45 | 25 |
| SCL 1005L82NKSP | 0.082 | 10 | 50 | 200 | 0.45 | 25 |
| SCL 1005LR10KSP | 0.1 | 10 | 25 | 200 | 0.8 | 25 |
| SCL 1005LR12KSP | 0.12 | 10 | 25 | 165 | 0.8 | 25 |
| SCL 1005LR15KSP | 0.15 | 10 | 25 | 140 | 0.9 | 25 |
| SCL 1005LR18KSP | 0.18 | 10 | 25 | 120 | 0.9 | 25 |
| SCL 1005LR22KSP | 0.22 | 10 | 25 | 110 | 1.2 | 25 |
| SCL 1005LR27KSP | 0.27 | 15 | 25 | 95 | 1.2 | 25 |
| SCL 1005LR33KSP | 0.33 | 15 | 25 | 85 | 1.25 | 18 |
| SCL 1005QR39KSP | 0.39 | 20 | 10 | 85 | 0.6 | 15 |
| SCL 1005QR47KSP | 0.47 | 20 | 10 | 80 | 0.7 | 15 |
| SCL 1005QR56KSP | 0.56 | 20 | 10 | 75 | 0.8 | 15 |
| SCL 1005QR68KSP | 0.68 | 20 | 10 | 70 | 0.9 | 15 |
| SCL 1005QR82KSP | 0.82 | 20 | 10 | 65 | 0.9 | 15 |
| SCL 1005P1R0KSP | 1 | 20 | 10 | 60 | 1 | 15 |
| SCL 1005P1R2KSP | 1.2 | 20 | 10 | 55 | 1.25 | 15 |
| SCL 1005P1R5KSP | 1.5 | 20 | 10 | 50 | 1.4 | 15 |
| SCL 1005P1R8KSP | 1.8 | 20 | 10 | 45 | 1.55 | 15 |
| SCL 1005P2R2KSP | 2.2 | 20 | 10 | 40 | 1.7 | 10 |
| SCL 1005Q1R0KSP | 1 | 20 | 10 | 40 | 0.9 | 15 |
| SCL 1005Q1R2KSP | 1.2 | 20 | 10 | 35 | 1.2 | 15 |
| SCL 1005Q1R5KSP | 1.5 | 20 | 10 | 30 | 1.2 | 15 |
| SCL 1005Q1R8KSP | 1.8 | 20 | 10 | 30 | 1.45 | 15 |
| SCL 1005Q2R2KSP | 2.2 | 20 | 10 | 28 | 1.7 | 10 |
| SCL 1005Q2R7KSP | 2.7 | 20 | 10 | 28 | 2.4 | 10 |
| SCL 1005Q3R3KSP | 3.3 | 20 | 10 | 28 | 2.7 | 10 |
| SCL 1608 Series | | | | | | |
| SCL 1608L47NKSP | 0.047 | 10 | 50 | 260 | 0.3 | 50 |
| SCL 1608L68NKSP | 0.068 | 10 | 50 | 250 | 0.3 | 50 |
| SCL 1608L82NKSP | 0.082 | 10 | 50 | 245 | 0.3 | 50 |
| SCL 1608LR10KSP | 0.1 | 15 | 25 | 240 | 0.5 | 50 |
| SCL 1608LR12KSP | 0.12 | 15 | 25 | 205 | 0.5 | 50 |
| SCL 1608LR15KSP | 0.15 | 15 | 25 | 180 | 0.6 | 50 |

◆ Specifications

| Part Number | Inductance (μH) | Min. Quality Factor (Q) | L, Q Test Freq.L/Q Freq. (MHz) | Min.Self-resonant Frequency S.R.F(MHz) | Max. DC Resistance DCR(Ω) | Max. Rated Current Ir(mA) |
|------------------------|-----------------|-------------------------|--------------------------------|--|---------------------------|---------------------------|
| SCL 1608 Series | | | | | | |
| SCL 1608LR18KSP | 0.18 | 15 | 25 | 165 | 0.6 | 50 |
| SCL 1608LR22KSP | 0.22 | 15 | 25 | 150 | 0.8 | 50 |
| SCL 1608LR27KSP | 0.27 | 15 | 25 | 136 | 0.8 | 50 |
| SCL 1608LR33KSP | 0.33 | 15 | 25 | 125 | 0.85 | 35 |
| SCL 1608LR39KSP | 0.39 | 15 | 25 | 110 | 1 | 35 |
| SCL 1608LR47KSP | 0.47 | 15 | 25 | 105 | 1.35 | 35 |
| SCL 1608LR56KSP | 0.56 | 15 | 25 | 95 | 1.55 | 35 |
| SCL 1608LR68KSP | 0.68 | 15 | 25 | 90 | 1.7 | 35 |
| SCL 1608LR82KSP | 0.82 | 15 | 25 | 85 | 2.1 | 35 |
| SCL 1608B1R0KSP | 1 | 35 | 10 | 90 | 0.7 | 25 |
| SCL 1608B1R2KSP | 1.2 | 35 | 10 | 85 | 0.8 | 25 |
| SCL 1608B1R5KSP | 1.5 | 35 | 10 | 80 | 0.95 | 25 |
| SCL 1608B1R8KSP | 1.8 | 35 | 10 | 75 | 1.15 | 25 |
| SCL 1608B2R2KSP | 2.2 | 35 | 10 | 70 | 1.25 | 25 |
| SCL 1608P1R0KSP | 1 | 35 | 10 | 90 | 0.6 | 25 |
| SCL 1608P1R1KSP | 1.1 | 35 | 10 | 90 | 0.6 | 25 |
| SCL 1608P1R2KSP | 1.2 | 35 | 10 | 85 | 0.8 | 25 |
| SCL 1608P1R5KSP | 1.5 | 35 | 10 | 80 | 0.8 | 25 |
| SCL 1608P1R8KSP | 1.8 | 35 | 10 | 75 | 0.95 | 25 |
| SCL 1608P2R2KSP | 2.2 | 35 | 10 | 70 | 1.15 | 15 |
| SCL 1608Q1R0KSP | 1 | 35 | 10 | 75 | 0.6 | 25 |
| SCL 1608Q1R1KSP | 1.1 | 35 | 10 | 75 | 0.6 | 25 |
| SCL 1608Q1R2KSP | 1.2 | 35 | 10 | 65 | 0.8 | 25 |
| SCL 1608Q1R5KSP | 1.5 | 35 | 10 | 60 | 0.8 | 25 |
| SCL 1608Q1R8KSP | 1.8 | 35 | 10 | 55 | 0.95 | 25 |
| SCL 1608Q2R2KSP | 2.2 | 35 | 10 | 50 | 1.15 | 15 |
| SCL 1608Q2R7KSP | 2.7 | 35 | 10 | 45 | 1.35 | 15 |
| SCL 1608Q3R3KSP | 3.3 | 35 | 10 | 40 | 1.55 | 15 |
| SCL 1608Q3R9KSP | 3.9 | 35 | 10 | 35 | 1.7 | 15 |
| SCL 1608Q4R7KSP | 4.7 | 35 | 10 | 33 | 2.1 | 15 |
| SCL 1608S5R6KSP | 5.6 | 35 | 4 | 22 | 1.55 | 5 |
| SCL 1608S6R8KSP | 6.8 | 35 | 4 | 20 | 1.7 | 5 |
| SCL 1608S8R2KSP | 8.2 | 35 | 4 | 18 | 2.1 | 5 |
| SCL 1608S100KSP | 10 | 30 | 2 | 17 | 1.85 | 3 |
| SCL 1608S120KSP | 12 | 30 | 2 | 15 | 2.1 | 3 |

◆ Specifications

| Part Number | Inductance (μH) | Min. Quality Factor (Q) | L, Q Test Freq.L/Q Freq. (MHz) | Min.Self-resonant Frequency S.R.F(MHz) | Max. DC Resistance DCR(Ω) | Max. Rated Current Ir(mA) |
|------------------------|-----------------|-------------------------|--------------------------------|--|---------------------------|---------------------------|
| SCL 1608 Series | | | | | | |
| SCL 1608T150KSP | 15 | 20 | 1 | 14 | 1.7 | 1 |
| SCL 1608T180KSP | 18 | 20 | 1 | 13 | 1.85 | 1 |
| SCL 1608T220KSP | 22 | 20 | 1 | 11 | 2.1 | 1 |
| SCL 1608T270KSP | 27 | 20 | 1 | 10 | 2.75 | 1 |
| SCL 1608T330KSP | 33 | 20 | 1 | 9 | 2.95 | 1 |
| SCL 2012 Series | | | | | | |
| SCL 2012L47NKSP | 0.047 | 15 | 50 | 320 | 0.2 | 300 |
| SCL 2012L68NKSP | 0.068 | 15 | 50 | 280 | 0.2 | 300 |
| SCL 2012L82NKSP | 0.082 | 15 | 50 | 255 | 0.2 | 300 |
| SCL 2012LR10KSP | 0.1 | 20 | 25 | 235 | 0.3 | 250 |
| SCL 2012LR12KSP | 0.12 | 20 | 25 | 220 | 0.3 | 250 |
| SCL 2012LR15KSP | 0.15 | 20 | 25 | 200 | 0.4 | 250 |
| SCL 2012LR18KSP | 0.18 | 20 | 25 | 185 | 0.4 | 250 |
| SCL 2012LR22KSP | 0.22 | 20 | 25 | 170 | 0.5 | 250 |
| SCL 2012LR27KSP | 0.27 | 20 | 25 | 150 | 0.5 | 250 |
| SCL 2012LR33KSP | 0.33 | 20 | 25 | 145 | 0.55 | 250 |
| SCL 2012LR39KSP | 0.39 | 25 | 25 | 135 | 0.65 | 200 |
| SCL 2012LR47KSP | 0.47 | 25 | 25 | 125 | 0.65 | 200 |
| SCL 2012LR56KSP | 0.56 | 25 | 25 | 115 | 0.75 | 150 |
| SCL 2012LR47KSP | 0.47 | 15 | 50 | 320 | 0.2 | 300 |
| SCL 2012LR68KSP | 0.68 | 25 | 25 | 105 | 0.8 | 150 |
| SCL 2012LR82KSP | 0.82 | 25 | 25 | 100 | 1 | 150 |
| SCL 2012P1R0KSP | 1 | 45 | 10 | 95 | 0.4 | 50 |
| SCL 2012P1R2KSP | 1.2 | 45 | 10 | 85 | 0.5 | 50 |
| SCL 2012P1R5KSP | 1.5 | 45 | 10 | 80 | 0.5 | 50 |
| SCL 2012P1R8KSP | 1.8 | 45 | 10 | 75 | 0.6 | 50 |
| SCL 2012P2R2KSP | 2.2 | 45 | 10 | 70 | 0.65 | 30 |
| SCL 2012Q1R0KSP | 1 | 45 | 10 | 75 | 0.4 | 50 |
| SCL 2012Q1R1KSP | 1.1 | 45 | 10 | 65 | 0.5 | 50 |
| SCL 2012Q1R2KSP | 1.2 | 45 | 10 | 65 | 0.5 | 50 |
| SCL 2012Q1R5KSP | 1.5 | 45 | 10 | 60 | 0.5 | 50 |
| SCL 2012Q1R8KSP | 1.8 | 45 | 10 | 55 | 0.6 | 50 |
| SCL 2012Q2R2KSP | 2.2 | 45 | 10 | 50 | 0.65 | 30 |
| SCL 2012Q2R4KSP | 2.4 | 45 | 10 | 47 | 0.7 | 30 |
| SCL 2012Q2R7KSP | 2.7 | 45 | 10 | 45 | 0.75 | 30 |

◆ Specifications

| Part Number | Inductance (μH) | Min. Quality Factor (Q) | L, Q Test Freq.L/Q Freq. (MHz) | Min.Self-resonant Frequency S.R.F(MHz) | Max. DC Resistance DCR(Ω) | Max. Rated Current Ir(mA) |
|------------------------|-----------------|-------------------------|--------------------------------|--|---------------------------|---------------------------|
| SCL 2012 Series | | | | | | |
| SCL 2012Q3R3KSP | 3.3 | 45 | 10 | 41 | 0.8 | 30 |
| SCL 2012Q3R9KSP | 3.9 | 45 | 10 | 38 | 0.9 | 30 |
| SCL 2012Q4R7KSP | 4.7 | 45 | 10 | 35 | 1 | 30 |
| SCL 2012S5R6KSP | 5.6 | 50 | 4 | 32 | 0.9 | 15 |
| SCL 2012S6R8KSP | 6.8 | 50 | 4 | 29 | 1 | 15 |
| SCL 2012S8R2KSP | 8.2 | 50 | 4 | 26 | 1.1 | 15 |
| SCL 2012S100KSP | 10 | 50 | 2 | 24 | 1.15 | 15 |
| SCL 2012S120KSP | 12 | 50 | 2 | 22 | 1.25 | 15 |
| SCL 2012T150KSP | 15 | 30 | 1 | 19 | 0.8 | 5 |
| SCL 2012T180KSP | 18 | 30 | 1 | 18 | 0.9 | 5 |
| SCL 2012T220KSP | 22 | 30 | 1 | 16 | 1.1 | 5 |
| SCL 2012T270KSP | 27 | 30 | 1 | 14 | 1.15 | 5 |
| SCL 2012T330KSP | 33 | 30 | 0.4 | 13 | 1.25 | 5 |
| SCL 2012T390KSP | 39 | 35 | 2 | 8 | 2.9 | 4 |
| SCL 2012T470KSP | 47 | 35 | 2 | 7.5 | 3 | 4 |
| SCL 3216 Series | | | | | | |
| SCL 3216L47NKSP | 0.047 | 20 | 50 | 320 | 0.15 | 300 |
| SCL 3216L68NKSP | 0.068 | 20 | 50 | 280 | 0.25 | 300 |
| SCL 3216LR10KSP | 0.1 | 20 | 25 | 235 | 0.25 | 250 |
| SCL 3216LR12KSP | 0.12 | 20 | 25 | 220 | 0.3 | 250 |
| SCL 3216LR15KSP | 0.15 | 20 | 25 | 200 | 0.3 | 250 |
| SCL 3216LR18KSP | 0.18 | 20 | 25 | 185 | 0.4 | 250 |
| SCL 3216LR22KSP | 0.22 | 20 | 25 | 170 | 0.4 | 250 |
| SCL 3216LR27KSP | 0.27 | 20 | 25 | 150 | 0.5 | 250 |
| SCL 3216LR33KSP | 0.33 | 20 | 25 | 145 | 0.5 | 250 |
| SCL 3216LR39KSP | 0.39 | 25 | 25 | 135 | 0.5 | 200 |
| SCL 3216LR47KSP | 0.47 | 25 | 25 | 125 | 0.6 | 200 |
| SCL 3216LR56KSP | 0.56 | 25 | 25 | 115 | 0.7 | 150 |
| SCL 3216LR68KSP | 0.68 | 25 | 25 | 105 | 0.8 | 150 |
| SCL 3216LR82KSP | 0.82 | 25 | 25 | 100 | 0.9 | 150 |
| SCL 3216Q1R0KSP | 1 | 45 | 10 | 75 | 0.4 | 100 |
| SCL 3216Q1R2KSP | 1.2 | 45 | 10 | 65 | 0.5 | 100 |
| SCL 3216Q1R5KSP | 1.5 | 45 | 10 | 60 | 0.5 | 50 |
| SCL 3216Q1R8KSP | 1.8 | 45 | 10 | 55 | 0.5 | 50 |
| SCL 3216Q2R2KSP | 2.2 | 45 | 10 | 50 | 0.6 | 50 |


◆ Specifications

| Part Number | Inductance (μH) | Min. Quality Factor (Q) | L, Q Test Freq.L/Q Freq. (MHz) | Min.Self-resonant Frequency S.R.F(MHz) | Max. DC Resistance DCR(Ω) | Max. Rated Current Ir(mA) |
|------------------------|-----------------|-------------------------|--------------------------------|--|---------------------------|---------------------------|
| SCL 3216 Series | | | | | | |
| SCL 3216Q2R7KSP | 2.7 | 45 | 10 | 45 | 0.6 | 50 |
| SCL 3216Q3R3KSP | 3.3 | 45 | 10 | 41 | 0.7 | 50 |
| SCL 3216Q3R9KSP | 3.9 | 45 | 10 | 38 | 0.8 | 50 |
| SCL 3216Q4R7KSP | 4.7 | 45 | 10 | 35 | 0.9 | 50 |
| SCL 3216S5R6KSP | 5.6 | 50 | 4 | 32 | 0.7 | 25 |
| SCL 3216S6R8KSP | 6.8 | 50 | 4 | 29 | 0.8 | 25 |
| SCL 3216S8R2KSP | 8.2 | 50 | 4 | 26 | 0.9 | 25 |
| SCL 3216S100KSP | 10 | 50 | 2 | 24 | 1.0 | 25 |
| SCL 3216S120KSP | 12 | 50 | 2 | 22 | 1.05 | 15 |
| SCL 3216T150KSP | 15 | 35 | 1 | 19 | 0.7 | 5 |
| SCL 3216T180KSP | 18 | 35 | 1 | 18 | 0.7 | 5 |
| SCL 3216T220KSP | 22 | 35 | 1 | 16 | 0.9 | 5 |
| SCL 3216T270KSP | 27 | 35 | 1 | 14 | 0.9 | 5 |
| SCL 3216T330KSP | 33 | 35 | 0.4 | 13 | 1.05 | 5 |
| SCL 3216T390KSP | 39 | 40 | 2 | 11 | 3.0 | 5 |
| SCL 3216T470KSP | 47 | 40 | 2 | 10 | 3.4 | 5 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


◆ General Technical Data

| | |
|------------------------------------|---------------------------|
| Operating Temperature Range | -55°C ~ +125°C |
| Storage Condition | Less than 40°C and 70% RH |
| Soldering Method | Reflow or Wave Soldering |

◆ TYPICAL ELECTRICAL CHARACTERISTICS

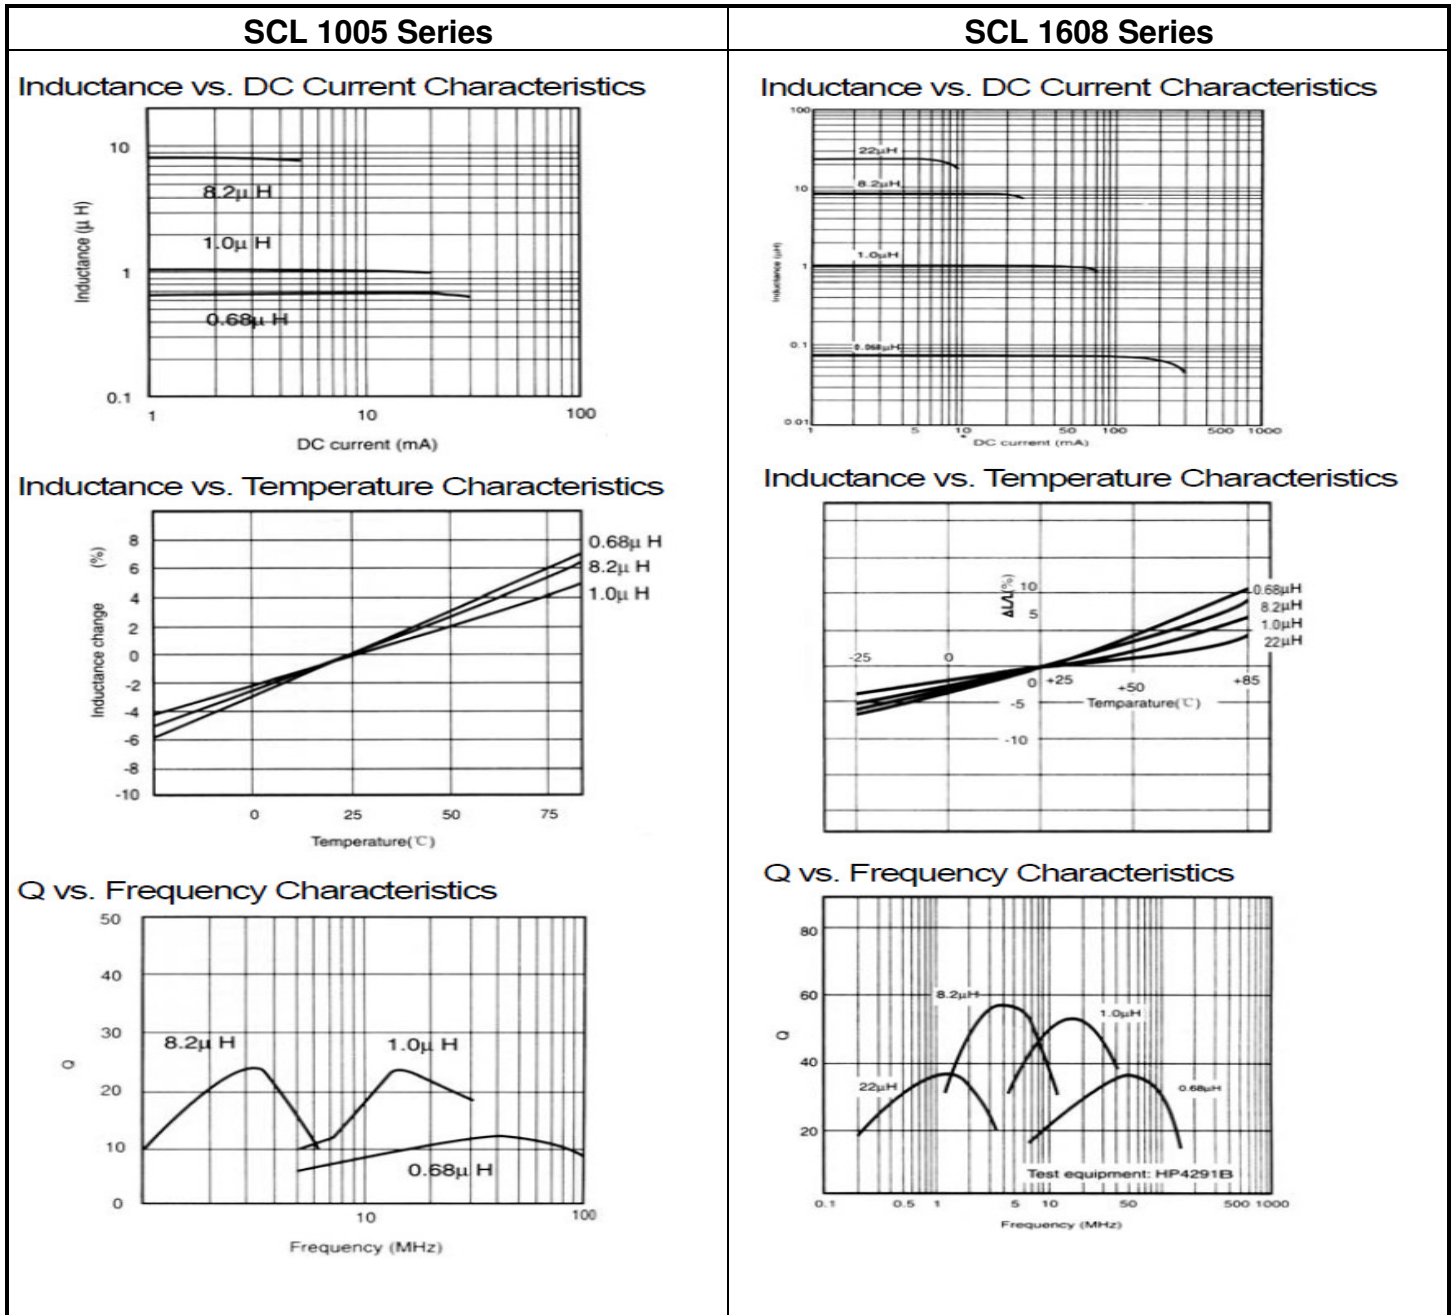

◆ TYPICAL ELECTRICAL CHARACTERISTICS

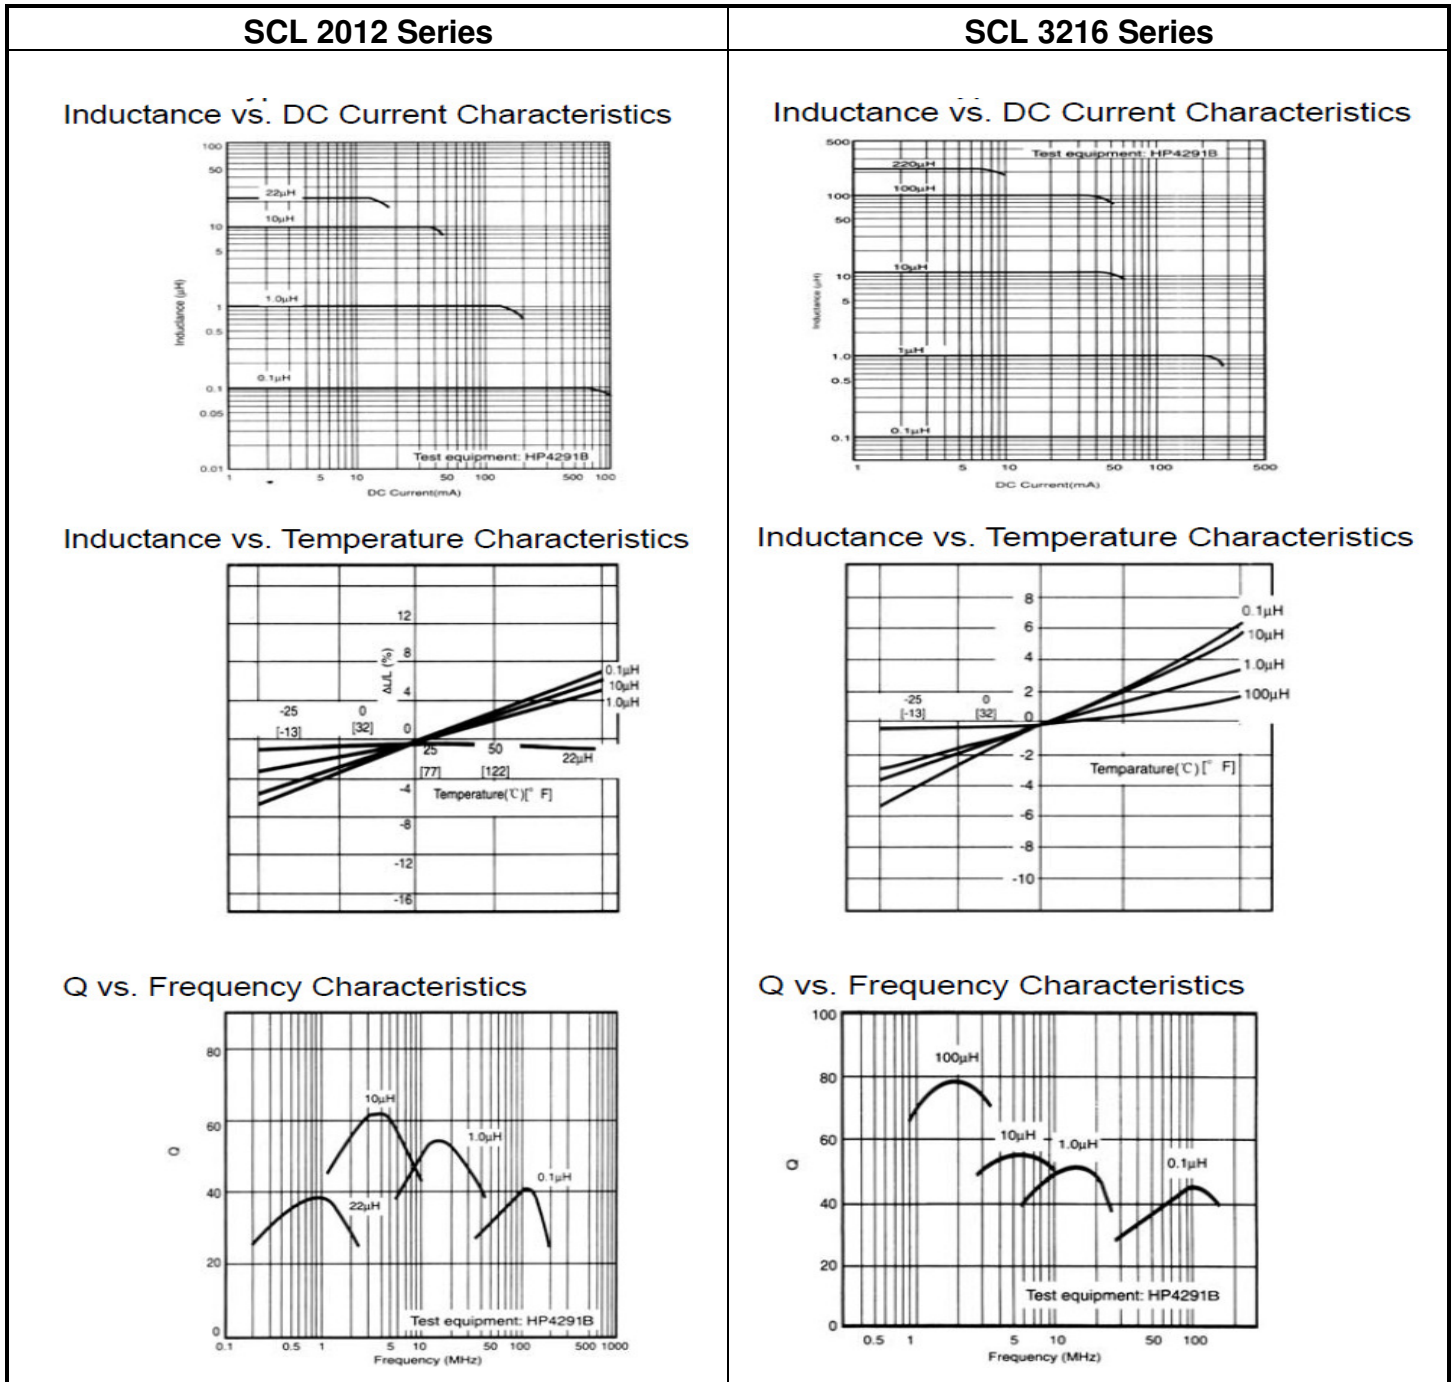

◆ Package

| Size EIA (EIA) | 1005 (0402) | 1608 (0603) | 2012 (0805) | 3216(1206) |
|--|-------------|-------------|-------------|------------|
| Standard Packing Quantity (pcs / reel) | 10,000 | 4,000 | 4,000 | 3,000 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sunltech](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)