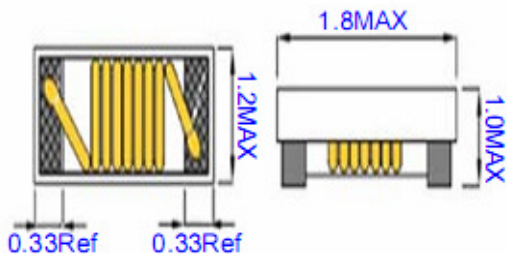



SHAPE & DIMENSION (UNIT:mm)

PAD LAYOUT(MM):

ELECREICAL SPECIFICATION

MEAS. ITEM	SPEC.				TEST FREQ.	CONDITIONS
	Value	Unit	Tolerance	Other		
L	2.2	μH	\pm	10%	7.9MHz/0.1V	Ta=25°C, Idc=0A
DCR	560	m Ω	30%			Ta=25°C
Isat	0.60	A	TYP		7.9MHz/0.2V	$\Delta L/L \leq 10\%$
Irms	0.58	A	TYP		7.9MHz/0.2V	$\Delta \leq 40^\circ\text{C}$
SRF	103	MHz	TYP			

GENERAL SPECIFICATION

Electrical specifications :	at 25°C
Operation Temperature:	-40~+125°C
Storage Temperature:	-40~+125°C


(1)WIRE TYPE: \varnothing 0.05mm

(2)WINDING: 22.5Ts(Ref.)

Isat(飽和電流):電感瞬間的突波電流

CMCW1608F2R2KTT


TME(秒)	Lsat(A)	L(UH)	$\Delta L/L(\%)$
1	0.000	2.16	0.00%
1	0.061	2.16	0.00%
1	0.122	2.16	0.00%
1	0.183	2.16	0.00%
1	0.244	2.15	-0.46%
1	0.305	2.15	-0.46%
1	0.366	2.13	-1.39%
1	0.427	2.12	-1.85%
1	0.488	2.10	-2.78%
1	0.549	2.06	-4.63%
1	0.610	1.85	-14.35%

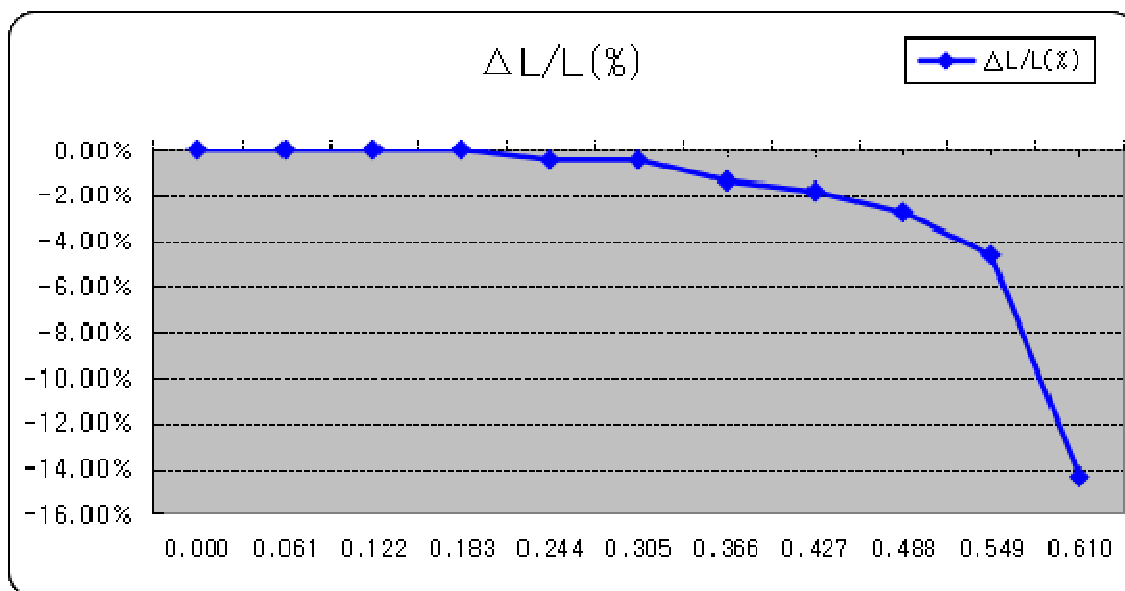

單點溫昇

TIME(S)	Irms(A)	L(uH)	$\Delta L/L(\%)$	Temp($^{\circ}\text{C}$)	$\Delta T(^{\circ}\text{C})$
30	0.000	2.11	0.00%	29.4	0.0
30	0.061	2.11	0.00%	29.5	0.1
30	0.122	2.11	0.00%	29.9	0.5
30	0.183	2.10	-0.47%	30.3	0.9
30	0.244	2.10	-0.47%	31.3	1.9
30	0.305	2.09	-0.95%	32.5	3.1
30	0.366	2.07	-1.90%	34.2	4.8
30	0.427	2.04	-3.32%	36.2	6.8
30	0.488	2.00	-5.21%	38.7	9.3
30	0.549	1.92	-9.00%	41.7	12.3
30	0.610	1.76	-16.59%	45.3	15.9

※DC bias current characteristics in the ambient temperature 25 $^{\circ}\text{C}$ Frequency 7.9MHz/0.2V

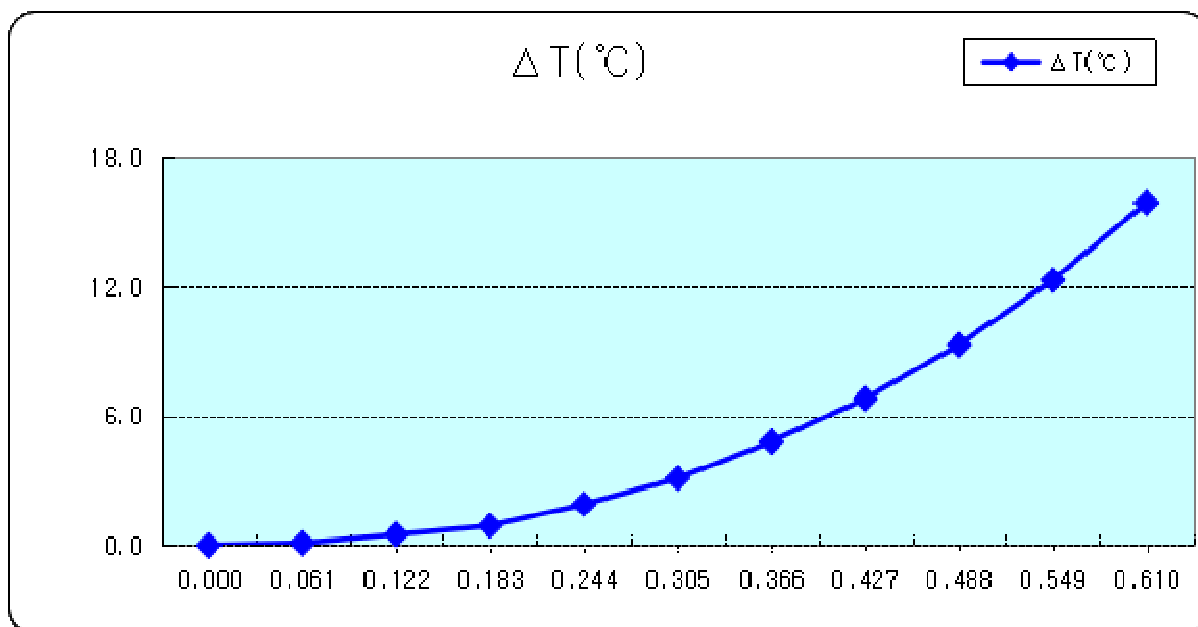



TEST DATA FOR PREPRODUCTION SAMPLE

TEST RESOLUTION						DIMENSION (Unit: mm)		
MEAS.	L	D.C.R			SRF	长	宽	高
ITEM	μH	mΩ			MHz	mm	mm	mm
SPEC.	2.2	560			103	Max.1.8	Max.1.2	Max.1.0
	±	±			Typ.			
	10%	30%						
TEST								
FREQ.	7.9MHz/0.2V		Isat 0.6A	$\Delta L/L \leq$ 10%				
1	2.18	550	1.98	-9.2%	86.14	1.76	1.03	0.96
2	2.15	555	1.96	-8.8%	85.65	1.68	1.05	0.97
3	2.16	554	1.99	-7.9%	86.64	1.67	1.06	0.98
4	2.14	556	1.98	-7.5%	80.20	1.78	1.02	0.96
5	2.20	554	2.02	-8.2%	84.66	1.74	1.04	0.95
6	2.21	557	2.01	-9.0%	83.67			
7	2.16	549	1.97	-8.8%	83.15			
8	2.18	554	2.00	-8.3%	81.19			
9	2.17	553	1.98	-8.8%	86.14			
10	2.19	556	2.00	-8.7%	80.70			
AVG.	2.174	553.8	1.989	-8.51%	83.814			
R	0.07	8	1.60	-4.20%	6.44			


PACKAGING

热封包装


Reel dimensions



UNIT:mm




Tape dimensions

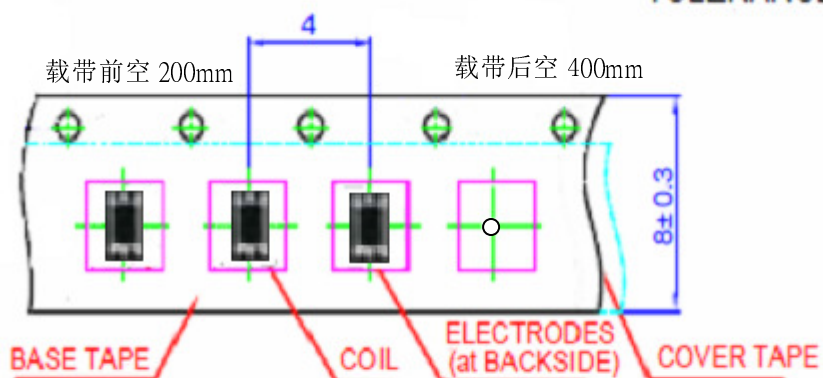

UNIT:mm
TOLERANCE:±0.1

Packaging

Quantity: **4000** pcs/reel

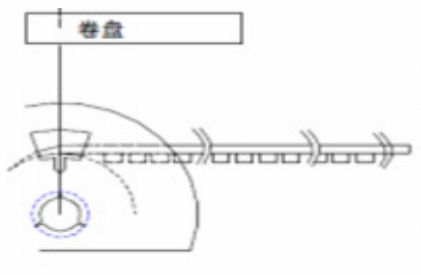

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sunltech](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)