

**IEC320-C13 (EU)**

Country of Origin: China  
 RoHS: yes  
 Application: For Class I. Appliances  
 Approvals: CEBC, KEMA, NF, OVE, VDE, IMQ, FI, S, D, N, ENEC, KC

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-022 16A/250V            |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 192 g / pc           |
|                  | BOX | 100 pcs / 1box             |
|                  |     | G.W.: 18,9 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |


**IEC320-C13 (UK)**

Country of Origin: China  
 RoHS: yes  
 Application: For Class I. Appliances  
 Approvals: ASTA, Singapore, ENEC

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-62 5A/250V              |
| Connector        |     | IS-14 10A/250V             |
| Fuse             |     | 5A                         |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 202 g / pc           |
|                  | BOX | 75 pcs / 1box              |
|                  |     | G.W.: 15,9 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |


**IEC320-C13 (USA)**

Country of Origin: China  
 RoHS: yes  
 Application: For Class I. Appliances  
 Approvals: UL, CSA

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-305B 10A/125V           |
| Connector        |     | IS-14 10A/125V             |
| Rating           |     | 300V 105°C                 |
| Flex cord        |     | SVT                        |
| WEIGHT / PACKING | 1pc | N.W.: 149 g / pc           |
|                  | BOX | 125 pcs / 1box             |
|                  |     | G.W.: 20,2 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |



**IEC320-C13 (Aus)**

Country of Origin      China  
 RoHS                      yes  
 Application              For Class I. Appliances  
 Approvals                SAA

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-502B 10A/250V           |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 250/440V 75°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 197 g / pc           |
|                  | BOX | 90 pcs / 1box              |
|                  |     | G.W.: 17,6 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |


**IEC320-C13 (Brazil)**

Country of Origin      China  
 RoHS                      yes  
 Application              For Class I. Appliances  
 Approvals                Inmetro, ENEC

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP027A 10A/250V            |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 158 g / pc           |
|                  | BOX | 120 pcs / 1box             |
|                  |     | G.W.: 18,8 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |


**IEC320-C13 (Swiss)**

Country of Origin      China  
 RoHS                      yes  
 Application              For Class I. Appliances  
 Approvals                +S, ENEC

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-027C 10A/250V           |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 169 g / pc           |
|                  | BOX | 100 pcs / 1box             |
|                  |     | G.W.: 17,4 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |



**IEC320-C13 (China)**

|                   |                         |
|-------------------|-------------------------|
| Country of Origin | China                   |
| RoHS              | yes                     |
| Application       | For Class I. Appliances |
| Approvals         | CCC                     |

|                  |     |                             |
|------------------|-----|-----------------------------|
| Length/cord      |     | 1.8m / 3x1.0mm <sup>2</sup> |
| Plug             |     | SP-506A 10A/250V            |
| Connector        |     | IS-14 10A/250V              |
| Rating           |     | 300/500V 70°C               |
| Flex cord        |     | RVV                         |
| WEIGHT / PACKING | 1pc | N.W.: 182 g / pc            |
|                  | BOX | 100 pcs / 1box              |
|                  |     | G.W.: 19,3 kg / box         |
|                  |     | 0.55x0.36x0.20 [m]          |


**IEC320-C13 (Argentina)**

|                   |                         |
|-------------------|-------------------------|
| Country of Origin | China                   |
| RoHS              | yes                     |
| Application       | For Class I. Appliances |
| Approvals         | IRAM, ENEC              |

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-852 10A/250V            |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 179 g / pc           |
|                  | BOX | 100 pcs / 1box             |
|                  |     | G.W.: 18,6 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |


**IEC320-C13 (Italy)**


|                   |   |
|-------------------|---|
| Country of Origin | China   |
| RoHS              | yes   |
| Application       | For Class I. Appliances                             |
| Approvals         | IMQ, D, CEBEC, S FI, N, IMQ, NF, OVE, KEMA, +S, VDE |

|                  |     |                            |
|------------------|-----|----------------------------|
| Length/cord      |     | 1.8m / 0.75mm <sup>2</sup> |
| Plug             |     | SP-028 10A/250V            |
| Connector        |     | IS-14 10A/250V             |
| Rating           |     | 300/500V 70°C              |
| Flex cord        |     | H05VV-F                    |
| WEIGHT / PACKING | 1pc | N.W.: 158 g / pc           |
|                  | BOX | 100 pcs / 1box             |
|                  |     | G.W.: 16,9 kg / box        |
|                  |     | 0.55x0.36x0.20 [m]         |




IEC320-C13 (Japan)

|                   |                         |
|-------------------|-------------------------|
| Country of Origin | China                   |
| RoHS              | yes                     |
| Application       | For Class I. Appliances |
| Approvals         | PSE                     |



|                  |     |                              |
|------------------|-----|------------------------------|
| Length/cord      |     | 1.8m / 3x0.75mm <sup>2</sup> |
| Plug             |     | SP-18P 7A/125V               |
| Connector        |     | IS-14 7A/125V                |
| Rating           |     | 300V 60°C                    |
| Flex cord        |     | VCTF                         |
| WEIGHT / PACKING | 1pc | N.W.: 166 g / pc             |
|                  | BOX | 100 pcs / 1box               |
|                  |     | G.W.: 17,3 kg / box          |
|                  |     | 0.55x0.36x0.20 [m]           |

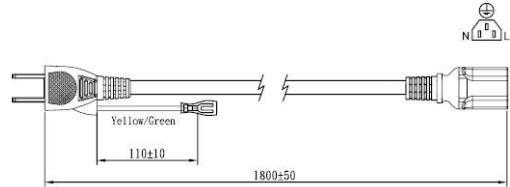

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [AC Power Leads](#) category:*

*Click to view products by [Sunny](#) manufacturer:*

Other Similar products are found below :

[YP-61+YC12](#) [YP21A+YC13](#) [6601](#) [FTP-629Y603](#) [1700001947](#) [IL13-EU1-H05-3100-300-S](#) [P28976-M45](#) [BB-3271V86](#) [P29844-M5](#)  
[P29844-M10](#) [P28818-M6](#) [387005324](#) [387005325](#) [59903000000](#) [387007040](#) [IL13P-EU1-H05-3100-300](#) [PCAK2](#) [PPA00002-25F](#) [EM9169](#)  
[32004](#) [32002](#) [W-98979](#) [W-98980](#) [W-98983](#) [W-98987](#) [W-99183](#) [AK-RD-07A](#) [LPS275](#) [18049236](#) [LA0055](#) [HC-3C1.5MM-W-P](#) [NUFPWC-](#)  
[03PMMS-LC500](#) [NUF-MSAP-08BMMM-RJ](#) [BEST 053](#) [W-99469](#) [W2243](#) [W-99945](#) [W-99764](#) [W-98642](#) [W-98643](#) [W-99440](#) [W-97783](#) [W-](#)  
[99175](#) [W-97760](#) [W-99243](#) [M02411](#) [W-98692](#) [50078](#) [M01895](#) [AK-RD-06A](#)