


SUNON®



## DC Brushless Fan & Blower

\*All products are RoHS compliant.



# DR MagLev®




## DR MagLev motor fan

[ DR MagLev = Dust-Resistance MagLev ]

### Features

- ◆ Better oil leak prevention
- ◆ Better dust-resistance
- ◆ Higher reliability
- ◆ Longer life expectancy

### Design Concepts

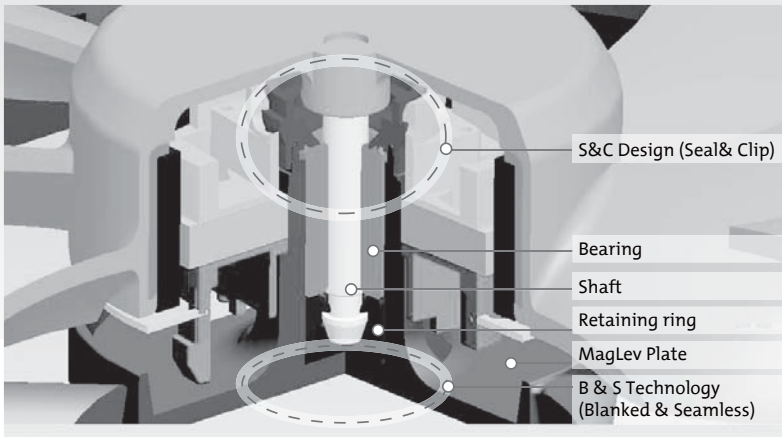

The two innovative design concepts of DR MagLev development are B&S (Blanked & Seamless) Technology and S&C (Seal & Clip) Design.



These innovative designs bring three excellent efficiencies to extend fan life:

- (1) To avoid dust invasion and extend motor life.
- (2) To prevent oil leakage
- (3) To prevent the motor components from falling off.

Note: DR MagLev Motor can be used with different motors types (radial, axial) and sizes, so the final design may vary from the above, according to the different motor structures.

### Characteristic

**1 S&C (Seal & Clip) Design**  
The innovative S&C (Seal & Clip) Design provides the best resistance to dust invasion.

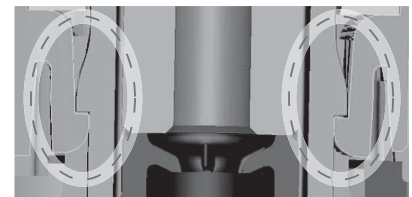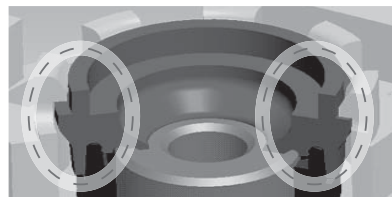

**2 Innovative B&S (Blanked & Seamless) Technology**

DR MagLev's one-piece structure with the B&S (Blanked & Seamless) Technology and S&C (Seal & Clip) Design provides the best prevention of oil leakage.

**3 High Reliability Design**

The S&C (Seal & Clip) Design can prevent the stator and impeller from falling off and help reduce noise that is caused by stator and impeller movement after a period of usage. The design greatly improves the life expectancy and the reliability

# SUNON® New Model Numbering System

M E 80 25 1 V 1 — 0000 — 999

### Function Code

999: standard model  
 A99: AutoRestart  
 C99: F type (3rd wire)  
 D99: with PWM  
 F99: AutoRestart and R type(3rd wire)  
 G99: AutoRestart and F type(3rd wire)  
 H99: AutoRestart and with PWM  
 Q99: AutoRestart , R type and with PWM  
 S99: AutoRestart , F type and with PWM

### Customer Code

0000 stand for standard model

### Speed

X: Super High 3: Low  
 1: High 4: Super Low  
 2: Medium

### Bearing

V: Vapo S: Sleeve  
 B: 2 Ball

### Voltage

0: 5VDC 3: 36VDC  
 1: 12VDC 4: 48VDC  
 2: 24VDC

### Fan Thickness

0~9; A~Z (except O)

### Frame Size

0~9; A~Z (except O)

### Motor Type

Series Code  
 E Series P Series  
 M Series

Code	Size(mm)	Code	Size(mm)	Code	Size(mm)	Code	Size(mm)
01~09	01~09	A0~A9	100~109	K0~K9	200~209	V0~V9	300~309
10~19	10~19	B0~B9	110~119	L0~L9	210~219	W0~W9	310~319
20~29	20~29	C0~C9	120~129	M0~M9	220~229	X0~X9	320~329
30~39	30~39	D0~D9	130~139	N0~N9	230~239	Y0~Y9	330~339
40~49	40~49	E0~E9	140~149	P0~P9	240~249	Z0~Z9	340~349
50~59	50~59	F0~F9	150~159	Q0~Q9	250~259		
60~69	60~69	G0~G9	160~169	R0~R9	260~269		
70~79	70~79	H0~H9	170~179	S0~S9	270~279		
80~89	80~89	I0~I9	180~189	T0~T9	280~289		
90~99	90~99	J0~J0	190~199	U0~U9	290~299		

## Certification



## Safety



\* Note: For critical or extreme environments, including non stop operation, please contact Sunon and we will gladly provide assistance with your product selection to ensure an appropriate cooling product for your application.

\* Note: The "Life Expectancy" of the fan has not been evaluated for use in combination with any end application. Therefore, the Life Expectancy Test Reports(L10 and MTTF Report) that relate to the fan are only for reference.



## ■ 40x40x20



Model	Bearing ● VAPO	Rating Voltage (VDC)	Power Current (mA)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H <sub>2</sub> O)	Noise (dBA)	Weight (g)
MB40200V1-0000-A99	●	5	190	0.95	7200	8.9	0.21	25.5	30.0
MB40200V2-0000-A99	●	5	123	0.32	6200	7.7	0.16	21.0	30.0
MB40200V3-0000-A99	●	5	81	0.41	5200	6.3	0.11	18.0	30.0
MB40201VX-0000-A99	●	12	115	1.38	8200	10.8	0.27	27.5	31.0
MB40201V1-0000-A99	●	12	70	0.84	7200	8.9	0.21	25.5	31.0
MB40201V2-0000-A99	●	12	50	0.60	6200	7.7	0.16	21.0	31.0
MB40201V3-0000-A99	●	12	40	0.48	5200	6.3	0.11	18.0	31.0
MB40202VX-0000-A99	●	24	64	1.54	8200	10.8	0.27	27.5	31.0
MB40202V1-0000-A99	●	24	50	1.20	7200	8.9	0.21	25.5	31.0
MB40202V2-0000-A99	●	24	33	0.80	6200	7.7	0.16	21.0	31.0



Model	Bearing ○ SLEEVE	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H <sub>2</sub> O)	(dBA)	(g)
EB40200S1-0000-999	○	5	218	1.09	7200	8.9	0.21	25.5	30.0
EB40200S2-0000-999	○	5	140	0.70	6200	7.7	0.16	21.0	30.0
EB40200S3-0000-999	○	5	100	0.50	5200	6.3	0.11	18.0	30.0
EB40201SX-0000-999	○	12	120	1.44	8200	10.8	0.27	27.5	31.0
EB40201S1-0000-999	○	12	90	1.08	7200	8.9	0.21	25.5	31.0
EB40201S2-0000-999	○	12	63	0.76	6200	7.7	0.16	21.0	31.0
EB40201S3-0000-999	○	12	45	0.54	5200	6.3	0.11	18.0	31.0
EB40202S1-0000-999	○	24	54	1.30	7200	8.9	0.21	25.5	31.0
EB40202S2-0000-999	○	24	33	0.80	6200	7.7	0.16	21.0	31.0

## ■ 50x50x15



Model	Bearing ● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H <sub>2</sub> O)	(dBA)	(g)
ME50151V1-0000-A99	●	12	145	1.74	7000	18.6	0.26	40.1	27.6
ME50151V2-0000-A99	●	12	125	1.50	6100	16.1	0.20	36.0	27.6
ME50151V3-0000-A99	●	12	65	0.78	4900	12.9	0.14	30.1	27.6
ME50152V1-0000-A99	●	24	95	2.28	7000	18.6	0.26	40.1	27.6
ME50152V2-0000-A99	●	24	80	1.92	6100	16.1	0.20	36.0	27.6

## ■ 60x60x15



Model	Bearing ● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H <sub>2</sub> O)	(dBA)	(g)
ME60151V1-0000-A99	●	12	160	1.92	5400	25.2	0.15	36.2	30.5
ME60151V2-0000-A99	●	12	140	1.68	4700	21.9	0.12	32.5	30.5
ME60151V3-0000-A99	●	12	75	0.90	3900	18.1	0.08	28.2	30.5
ME60152V1-0000-A99	●	24	100	2.40	5400	25.2	0.15	36.2	30.5
ME60152V2-0000-A99	●	24	85	2.04	4700	21.9	0.12	32.5	30.5

\* If you need special specification. Please contact Sunon sales.

\* Specifications are subject to change without notice. Specifications in this catalog are for reference. More Sunon products information please visit SUNON web site at <http://www.sunon.com>.



#### **Sunonwealth Electric Machine Industry Co., Ltd. (Headquarters)**

TEL : +886-7-8135888  
URL: [www.sunon.com](http://www.sunon.com)  
E-mail: [sunon@email.sunon.com.tw](mailto:sunon@email.sunon.com.tw)

#### **Sunon Inc. (U.S.A.)**

TEL : +1-714-255-0208  
URL : [www.sunonusa.com](http://www.sunonusa.com)  
E-mail : [info@sunon.com](mailto:info@sunon.com)

#### **Sunon SAS (Europe)**

TEL : +33-1-46154515  
URL: [www.sunoneurope.com](http://www.sunoneurope.com)  
E-mail : [info@sunoneurope.com](mailto:info@sunoneurope.com)

#### **Sunon Corporation (Japan)**

TEL : +81-3-5395-3069  
URL: [www.sunon.co.jp](http://www.sunon.co.jp)  
E-mail : [info@sunon.co.jp](mailto:info@sunon.co.jp)

#### **Sunon China (Shen Zhen Office)**

TEL : +86-755-26880688  
E-mail: [sunon@email.sunon.com.tw](mailto:sunon@email.sunon.com.tw)  
URL: [www.sunon.com.cn](http://www.sunon.com.cn)

#### **Sunonwealth Electric Machine Industry (HK) Ltd. (Hong Kong)**

TEL : + 852-24-111-388  
E-mail : [info@sunon.com.hk](mailto:info@sunon.com.hk)

#### **Sunon Taipei Office(Taipei)**

TEL: 02-27992383

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [sunon manufacturer](#):*

Other Similar products are found below :

[MB50151V2-000U-A99](#) [3113HQ/MC40101V2-Q00U-S99](#) [UF3A3-700](#) [UB3H3-500](#) [PMB2475PNB3-AY.\(2\).GN](#) [KD1208PHB1.13.\(2\).GN](#)  
[KD1204PKB3 \(2\).GN](#) [GB1205PKV2-8AY.F.GN](#) [EE60251B1-000U-C99](#) [3236HQ/PF40281B1-D17U-S99](#) [A2175HBT-TC.R.GN](#) [B2-10](#)  
[SM203-13002](#) [PE80254V1-000U-A99](#) [PF92251V1-1000U-A99](#) [ME80201V2-000U-A99](#) [PE92252B1-000C-AB9](#) [MC30101V2-000C-](#)  
[A99\(165mm\)](#) [MF20100V4-1Q04C-G99](#) [PE92254B2-000C-F99](#) [MC30150V1-000C-A99](#) [PE80252B1-000C-AB9](#) [MF20060V3-1Q07A-G99](#)  
[MC25100V2-000C-G99](#) [PMD2412PMB1-A\(2\).R.GN.I55](#) [AB1123-HST.GN](#) [PF80381BX-000U-A99](#) [MF25100V1-1000U-A99](#) [PF80251V1-](#)  
[1000U-F99](#) [PF92381B1-000U-A99](#) [VF40281BX-000U-A9H](#) [40HVVH120M](#) [LA004-024A83DY](#) [SM203-14001Y](#) [MF80251V1-1000U-G99](#)  
[EE60251B2-000U-999](#) [SM203-13004Y](#) [SM205-13001](#) [F92-B](#) [FG-8/45](#) [LA004-011A99DN](#) [SF11592A-1092HSL.GN](#) [CF4113HBL-000U-](#)  
[ABD](#) [SF23092A-2092MBL.GN](#) [MF20100V1-1000U-A99](#) [DP203A-2123LBL.\(5\).GN](#) [PF40281B3-000U-A99](#) [LM310-001A99DN](#)  
[KD2406PKB2.\(2\).GN](#) [MF30060V1-1000U-G99](#)