



# High power thin film chip resistors (long side terminal)

## PRG series

AEC-Q200 Compliant

### Features

- Long side terminal enabling higher power capability
- Significantly larger power handling capability than conventional same size resistors  
Size: 2010 ~ 6432, power ratings: 0.5 ~ 3.0W, Resistance range: 2.5 ~ 250KΩ
- Precision resistance tolerance: ±0.1%, very small TCR: ±25ppm/°C
- Thin film structure enabling low noise and anti-sulfur

### Applications

- Automotive electronics
- DC motor, inverters
- Robotics, Industrial control system

Thin film surface mount resistors

PRG series



### ◆Part numbering system

**PRG 3216 P - 1001 - B - T5**

Series code

Size: PRG2010, PRG3216  
PRG5025, PRG6432

Temperature coefficient of resistance

Packaging quantity: T4(4,000pcs)

(PRG6432, PRG5025)

T5(5,000pcs)

(PRG3216, PRG2010)


Resistance tolerance

Nominal resistance value (E-24, E-96: all 4 digit)

### ◆Electrical Specification

Type	Power ratings	Temperature coefficient of resistance (ppm/°C)	Resistance range(Ω) Resistance tolerance		Maximum voltage	Resistance value series	Operating temperature	Packaging quantity
			±0.1% (B)	±0.5% (D)				
PRG2010	0.5W	±25(P)	47≤R≤25k	10≤R≤25k	100V	E-24, E-96	-55°C ~ 155°C	T5
		±50(Q)		2.5≤R≤25k				
PRG3216	1.0W	±25(P)	47≤R≤100k	10≤R≤100k	150V	E-24, E-96	-55°C ~ 155°C	T4
		±50(Q)		2.5≤R≤100k				
PRG5025	1.5W ~ 2.0W	±25(P)	47≤R≤200k	10≤R≤200k	200V	E-24, E-96	-55°C ~ 155°C	T5
		±50(Q)		2.5≤R≤200k				
PRG6432	2.0W ~ 3.0W	±25(P)	47≤R≤250k	10≤R≤250k	400V	E-24, E-96	-55°C ~ 155°C	T4
		±50(Q)		2.5≤R≤250k				

## ◆Dimensions

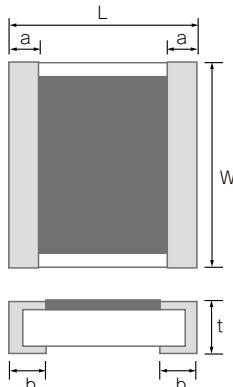

Type	Size (inch)	W	L	a	b	t
<b>PRG2010</b>	0804	2.00±0.20	1.00±0.20	0.20±0.10	0.25±0.10	0.35±0.10
<b>PRG3216</b>	1206	3.20+0.40/-0.20	1.60±0.20	0.30±0.20	0.35±0.20	0.45+0.15/-0.10
<b>PRG5025</b>	2010	5.00±0.20	2.50±0.20	0.55±0.20	0.60±0.20	0.45+0.15/-0.10
<b>PRG6432</b>	2512	6.40+0.20/-0.40	3.20±0.20	0.40±0.20	0.55±0.20	0.45+0.15/-0.10

(unit : mm)

Thin film surface mount resistors

PRG series

## ◆Reliability specification

Test items	Condition (test methods (JIS C5201-1))	Standard	
		≤47Ω	≥47Ω
Life (biased)	70°C, rated voltage, <sup>*1</sup> 90min on 30min off, 1000hours	±(0.25%+0.05Ω)	±(0.1%+0.01Ω)
High temperature high humidity	85°C, 85%RH, 1/10 of rated power, 90min on 30min off, 1000hours	±(0.25%+0.05Ω)	±(0.1%+0.01Ω)
Temperature shock	-55°C (30min) ~ 125°C (30min) 1000cycles	±(0.25%+0.05Ω)	±(0.1%+0.01Ω)
High temperature exposure	155°C, no bias, 1000hours	±(0.25%+0.05Ω)	±(0.1%+0.01Ω)
Resistance to soldering heat	260±5°C, 10 seconds (reflow)	±(0.1%+0.01Ω)	±(0.05%+0.01Ω)

<sup>\*1</sup> Rated voltage is given by  $E=\sqrt{R \times P}$ 

E= rated voltage (V), R=nominal resistance value(Ω), P=rated power(W)

If rated voltage exceeds maximum voltage /element, maximum voltage/element is the rated voltage.

# High power thin film chip resistors (long side terminal)

## ■ PRG series

### ◆ Reliability test data





Thin film surface mount resistors

PRG series





#### ○ Biased life test







#### ○ High temperature high humidity (biased)

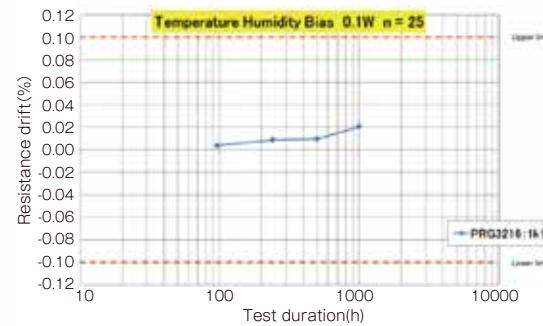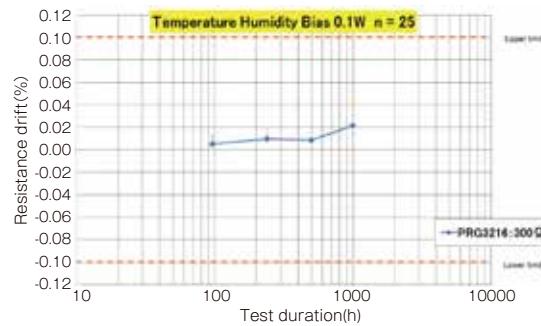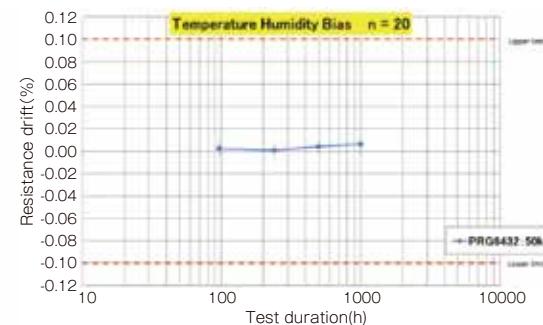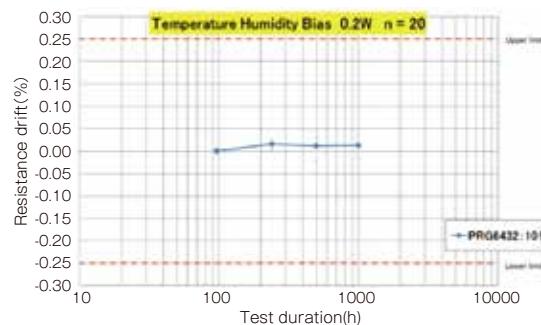

## ○ Temperature shock

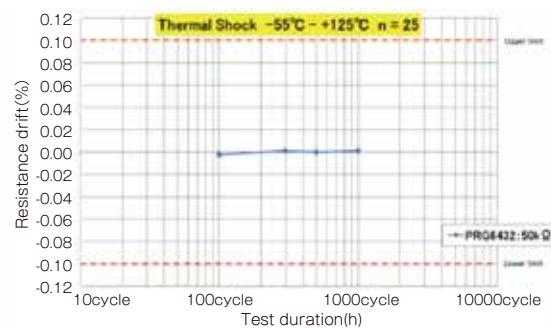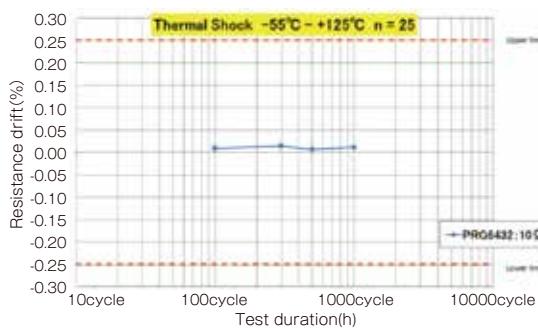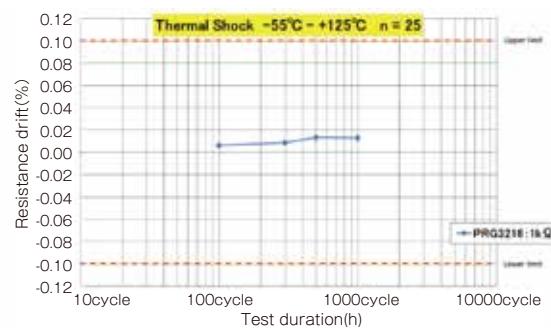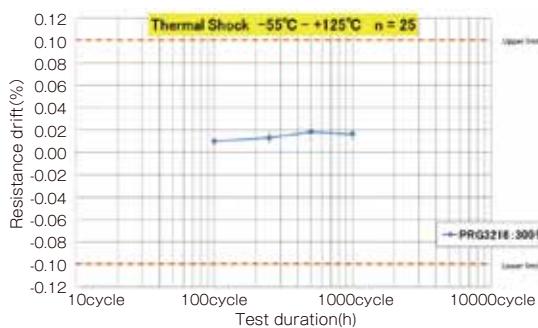


## ○ High temperature exposure

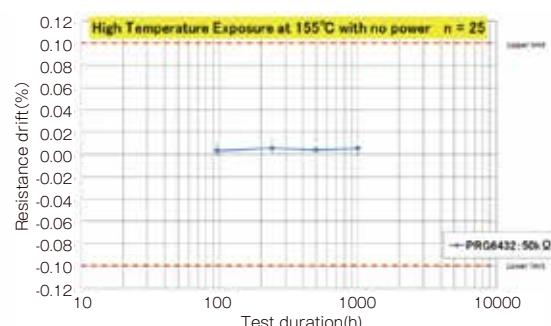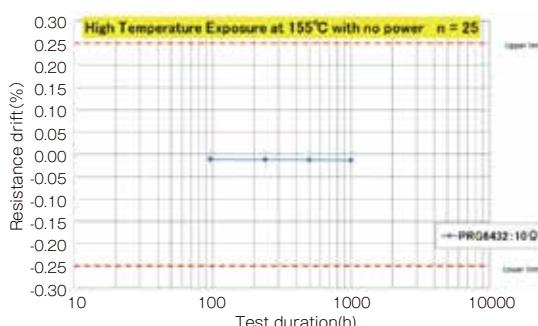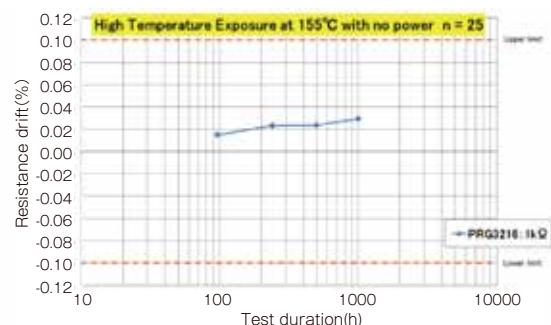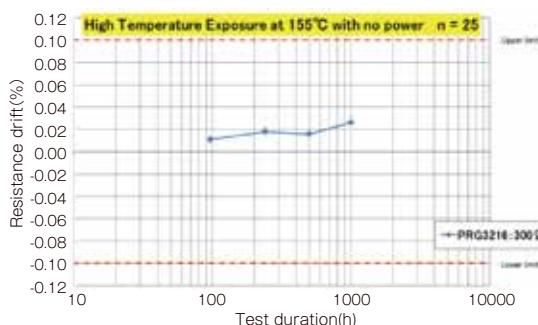


## ◆ Derating Curve

### ○ PRG3216

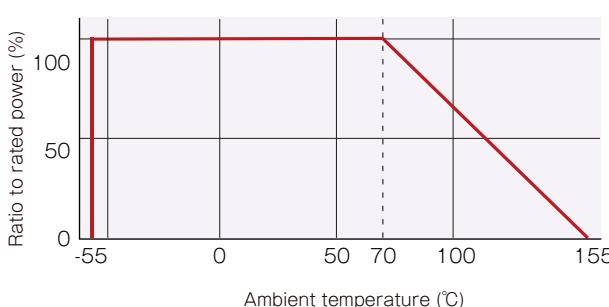

### ○ PRG6432

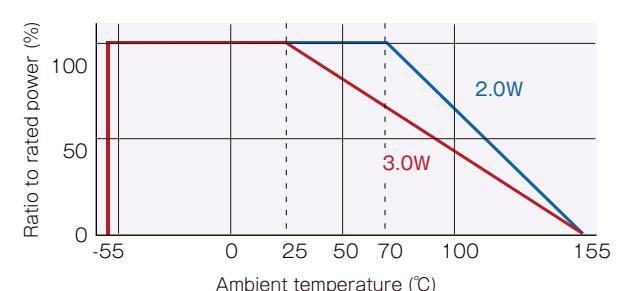

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Thin Film Resistors - SMD category:***

***Click to view products by Susumu manufacturer:***

Other Similar products are found below :

[7-2176089-6 MCW0406MD1001DP500 FCR1206J22R FCR1206J33R 1-2176090-3 1-2176089-6 ERA-3EEB2742V](#)  
[NCSR250F4M50DTRGF 2176089-1 2176090-4 2176091-3 CMB02070X3000GB200 CPA2512Q6R80FS-T10 4-1625868-7 5-1625868-9 5-18022-5 ERA-3EEB2671V CFR0W4J0220A2P P1206Y1804FNTA CPA2512E68R0FS-T10 CPA2512Q4R70FS-T10 8-2176091-9 2-2176091-0 NCSR150FR003DTRT3F NTR06B5832CTRF NCSR200JR002DTRF RSJ372NL NRC-S12F4751TRF 8-1625868-1 1-2176092-4 4-2176093-9 2176091-9 RT1220P-101-M PLTU0805U1003LST5 PLTU0603U2001LST5 PLTU0805U1001LST5 PLTU0603U4702LST5 4-2176089-0 8-2176091-0 6-2176091-8 3-2176090-3 1-2176092-7 7-2176092-6 7-2176088-7 PCNM2512E1502BST5 2-2176094-5 PCNM2512E3012BST5 4-2176092-6 3-2176091-4 8-2176091-5](#)