



Metal thin film chip resistors (precision)

RR series

Features

- Excellent characteristics in resistance tolerance, temperature coefficient of resistance, current noise, and linearity


Applications

- Any electronics applications that require accuracy and reliability such as automotive electronics, industrial test and measurement, consumer electronics and many others.

Specifications

* Stocked items: E-24 series (TCR P and Q, resistance tolerance D), other E-24 and E-96 series are made to order.

Dimensions



unit : mm


Dimension (inch)	RR0306 (0201)	RR0510 (0402)	RR0816 (0603)	RR1220 (0805)	RR1632 (1206)	RR2632 (1210)
L	0.60±0.05	1.00±0.05	1.60±0.20	2.00±0.20	3.20±0.20	3.20±0.20
W	0.30±0.05	0.50±0.05	0.80±0.20	1.25±0.20	1.60±0.20	2.60±0.20
A	0.12±0.05	0.20±0.10	0.30±0.20	0.40±0.20	0.50±0.20	0.50±0.20
B	0.12±0.05	0.25±0.05	0.30±0.20	0.40±0.20	0.45±0.20	0.45±0.20
T	0.23±0.03	0.35±0.05	0.40±0.10	0.40±0.10	0.40±0.10	0.40±0.10

Electrical characteristics

Series name	RR0306	RR0510	RR0816	RR1220	RR1632	RR2632
power	1/20W	1/16W	1/16W	1/10W	1/8W	1/4W
E series offered	E-24		E-24, E-96			
Resistance range (Ω)	10~30 33~22k	10~91 100~100k	10~91 100~360k	10~91 100~1M	10~47 51~1M 100~200k	10~47 51~1M 100~200k
Resistance tolerance (%)	±0.1% (B)	—	—	—	—	—
	±0.5% (D)	—	○	○	○	○
	±1.0% (F)	○	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	○
	±10 (N)	—	—	—	—	○
	±25 (P)	—	○	○	○	○
	±50 (Q)	—	—	○	○	○
	±100 (R)	○	○	—	—	—
Maximum voltage	15V	25V	75V	100V	150V	200V
Operating temperature	-55°C~125°C					
Packaging	5,000pcs	—	—	○	○	○
	10,000pcs	—	○	—	—	—

Contact us for the jumper resistor in RR0816 size (part number: RL0816-JMP)

Part numbering system

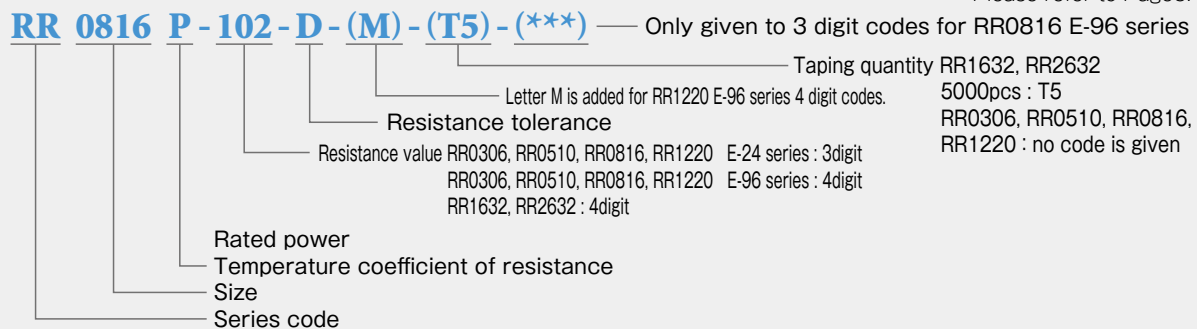

* Please refer to Page6.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [Susumu manufacturer](#):

Other Similar products are found below :

[5112](#) [65709-330JE](#) [PF2512FKF7W0R007L](#) [PR2512FKF7W0R003L](#) [PR2512FKF7W0R005L](#) [RCWL0603R500JNEA](#) [ERJ-3BQF1R1V](#) [ERJ-L14UJ42MU](#) [2-2176088-5](#) [PF2512FKF7W0R006L](#) [PF2512FKF7W0R033L](#) [2-2176089-4](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [CGSSL1R01J](#) [CGSSL1R047J](#) [RC1005F124CS](#) [RCWE2512R110FKEA](#) [RCWL0805R330JNEA](#) [RL73H3AR47FTE](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [RLP73N1ER43JTD](#) [TL3AR01FTDG](#) [TLR3A20DR0005FTDG](#) [LRC-LR2512LF-01-R820J](#) [ERJ-3BQF4R3V](#) [ERJ-L14UF68MU](#) [TLR3A20DR001FTDG](#) [TLR3A30ER0005FTDG](#) [WR06X104JGLJ](#) [RLP73K1ER82JTD](#) [TL2BR01F](#) [TLR3A20DR01FTDG](#) [WSR3R0600FEA32](#) [ERJ-14BQF1R6U](#) [ERJ-14BQJR30U](#) [SP1220RJT](#) [SP1R12J](#) [ERJ-14BQF6R2U](#) [RL7520WT-R039-G](#) [PF1206FRF7W0R02L](#) [RL7520WT-R002-F](#) [RL7520WT-R047-F](#) [RLP73N2BR068FTDF](#) [RL7520WT-R005-F](#) [RCWE2512R220FKEA](#) [RCWE120625L0FMEA](#)