swissbit[®]


Product Fact Sheet

Industrial **CFast[™] Card**

F-50 Series SATA Gen3 - 6.0 Gbit/s, MLC

Commercial and Industrial Temperature Grade

Date: December 17, 2019 Revision: 1.06

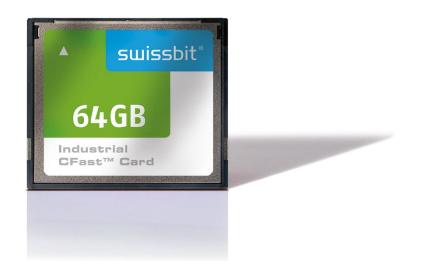



Product Fact Sheet F–50 Series



Product Summary

- Capacities: 8 GBytes, 16 GBytes, 32 GBytes, 64 GBytes, 128 GBytes, 256 GBytes
- Form Factor: CFast[™] 2.0 (36.4 mm x 42.8 mm x 3.6 mm)
- Compliance: SATA Gen3 6 Gbit/s (Gen2 3 Gbit/s and Gen1 1.5 Gbit/s backward compatible)
- Command Sets: Supports ATA/ATAPI-8 and ACS-2
- Performance:
 - Read Performance: Sequential Read up to 500 MBytes/s, Random Read 4K up to 53,500 IOPS
 - Write Performance: Sequential Write up to 330 MBytes/s, Random Write 4K up to 74,000 IOPS
- Operating Temperature Range¹:
 - \circ $\,$ Commercial: o °C to 70 °C $\,$
 - Industrial: -40 °C to 85 °C
- Storage Temperature Range: -40 °C to 85 °C
- Operating Voltage: 3.3 V ± 5%
- Power (Max Capacity): Read (Active): 1.2 W; Write (Active): 2.0 W; Idle: 248 mW; Slumber: 17 mW
- Data Retention: 10 Years @ Life Begin / 1 Year @ Life End
- Endurance in TeraBytes Written (TBW) Max Capacity²: Client ≥ 165; Enterprise ≥ 8
- Shock/Vibration: 500 g / 20 g
- Hardware BCH Code ECC: up to 66 bit correction per 1 KByte page
- NAND Flash Technology: Multi-Level Cell (MLC)
- Mean Time Between Failure (MTBF): > 2,000,000 hours
- Data Reliability: < 1 non-recoverable error per 10¹⁶ bits read

Product Features

- Dynamic and Static Wear Leveling
- Subpage Mode Flash Translation Layer (FTL)
- Active Data Care Management: Read Refresh
- Lifetime Enhancements
 - Dynamic Bad Block Remapping
 - Write Amplification Reduction
- On-Board Power Fail Protection
- AHCI, TRIM, and NCQ Support
- ATA Security Feature Set Support
- DEVSLP Compatible
- In-Field Firmware Update
- Enterprise-Grade Self-Monitoring, Analysis, and Reporting Technology (S.M.A.R.T.)
- Controlled "Locked" BOM
- 30 µinch Gold-Plated Connector (on request)
- Conformal coating (on request)
- Swissbit Life Time Monitoring (SBLTM) Tool and SDK for SBLTM (on request)

Why Swissbit?

Swissbit is focused on the design, development, manufacture, and support of leading edge memory and storage solutions for the worldwide OEM/ODM marketplace. As a global supplier, Swissbit recognizes and addressees the higher level of application requirements of today's industrial, Netcom, and automotive customers by providing best-in-class products and services, with uncompromised attention to driving overall value and quality.

¹ Adequate airflow is required to ensure the temperature, as reported in the S.M.A.R.T. data, does not exceed 120°C (industrial temperature drive) and 105°C (commercial temperature drive) respectively.

² According to JEDEC (JESD47I), the time to write the full TBW is a minimum of 18 months. Higher average daily data volume reduces the specified TBW. The values listed are estimates and are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Memory Cards category:

Click to view products by Swissbit manufacturer:

Other Similar products are found below :

SQF-ISDS1-8G-21C USDCOEM-32GB LMEX1L128GG2 LMEX1L256GG2 LMEX1L016GG2 LMEX1L032GG2 LMEX1L064GG2 SDSDQAF4-032G-I SDSDQAF4-256G-I AP-CF016GKBNS-ETNRG CFLSH-016SDG MS-C6-8G WPCFC512M-HFITI-AA WPMSD001G-PFITI WPMSD002G-PFITI WPMSD004G-PFISMAS WPMSD008G-PFISM WPMSD008G-PFISMAS WPMSD016G-PFISM WPMSD016G-PFISMAS WPSDC001G-EAITI WPSDC002G-EAITI SPSDH008G-PFCSM SPSDH016G-PTCT5AS SPSDH032G-PTCT5AS HMC-EF283 SDCFXPS-032G-X46 SDCFXSB-128G-G46 SDSDQB-032G-B35 SDSDQM-032G-B35A SDU4GDMGRB SDU4GDPGRB 5788667-1-CUT-TAPE RP-SMLE32DA1 SDC4GDPGRB 2729389 VTDCFBPI004G SDSDAF3-016G-XI 2403484 VTDS41PI008G SDSDAF3-016G-I VSFCS2CC060G SDSDAF3-032G-XI SDSDAD-016G SDSDAF3-008G-XI SDSDAF3-008G-I SDSDQAB-016G-J VTDCFBPI008G M1A0-0160R12 M1A0-0320R12