swissbit®


Product Fact Sheet

Industrial **PCIe BGA SSD** (M.2 1620 BGA)

EN-20 Series PCIe Gen 3.1, 16x20mm BGA

Industrial Temperature Grade

Date: February 17, 2020 Revision: 1.00

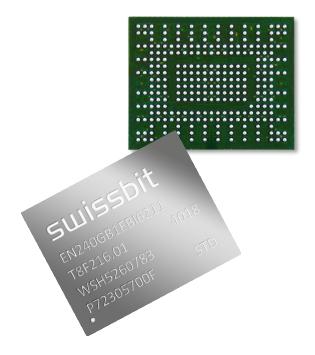



Product Fact Sheet EN-20 Series



Product Summary

- Capacities: 15 GBytes, 30 GBytes, 60 GBytes, 120 GBytes, 240 GBytes
- Form Factor: PCI Express® M.2 BGA (1620) (16mm x 20mm x 1.8mm)
- Compliance: PCI Express (PCIe) Specification Revision 3.1
- Interface: Gen3 x 4 Lanes
- Command Sets: Supports NVMe 1.3
- Performance:
 - \circ $\,$ Read Performance: Sequential Read up to 1,600 MBytes/s, Random Read 4K up to 145,000 IOPS $\,$
 - o Write Performance: Sequential Write up to 680 MBytes/s, Random Write 4K up to 105,000 IOPS
- Operating Temperature Range¹
 - Industrial: -40 °C to 85 °C
- Storage Temperature Range: -40°C to 85°C
- Operating Voltage: 3.3, 1.8 and 0.9V supply voltages
- Low Power Consumption
- Power:
 - Power States PSo, PS1, PS2, PS3 and PS4
 - o Thermal Throttling supported
- Data Retention: 10 Years @ Life Begin; 1 Year @ Life End
- High-Performance Processor with Integrated, Parallel Flash Interface Engines:
 - o 3D NAND Flash
 - LDPC Code ECC (up to 120bit corrections per 1KByte page)
 - End-to-end data path protection
 - Increased Overprovisioning for improved performance and endurance
 - Page RAID feature

Product Features

- Dynamic and Static Wear Leveling
- Subpage Mode Flash Translation Layer (FTL)
- Data Care Management
 - Active: Adaptive Read Refresh
 - Passive: Background Media Scan
- Lifetime Enhancements
 - o Dynamic Bad Block Remapping
 - Write Amplification Reduction
- Power Fail Data Loss Protection
- In-Field Firmware Update
- Self-Monitoring, Analysis, and Reporting Technology (S.M.A.R.T.)
- Swissbit Life Time Monitoring (SBLTM) Tool and SDK for SBLTM
- AES256 Encryption (on request)

Why Swissbit?

Swissbit is focused on the design, development, manufacture, and support of leading edge memory and storage solutions for the worldwide OEM/ODM marketplace. As a global supplier, Swissbit recognizes and addressees the higher level of application requirements of today's industrial, Netcom, and automotive customers by providing best-in-class products and services, with uncompromised attention to driving overall value and quality.

¹ Adequate airflow is required to ensure the drive temperature, as reported in the S.M.A.R.T. data, does not exceed the specified maximum operating temperature.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solid State Drives - SSD category:

Click to view products by Swissbit manufacturer:

Other Similar products are found below :

MTFDDAC512MAM-1K1_ASD25-MLC064G-CT-160-1_SQF-SM4V2-256G-SBC_MTFDDAA120MBB-2AE1ZABYY MTFDDAA240MBB-2AE1ZABYY_SQF-S25V4-240G-SCC_SQF-SDMM2-256G-S9E_MTFDKBA400TFS-1BC1ZABYY MTFDKBZ3T8TFR-1BC1ZABYY_MTFDKBA800TFS-1BC1ZABYY_SQF-SMSZ2-64GCSBC_B92.225HGV.00205_APM128GMFFN-6BTM1GW_MTFDDAK060MBD-1AH12ITYY_MTFDDAK960MBP-1AN16ABYY_VSF202PC016G-100_AF512GSMEL-VABIP_FFD-25-SATA-1-A_2400022_2913199_2701112_MTFDDAV512TBN-1AR1ZABYY_SSDPEKKA256G801_2400338_2400335_MTFDDAV256TBN-1AR12ABYY_SSDPEKKA020T801_MTFDDAK064MBD-1AH12ITYY_MTFDDAK800MBP-1AN1ZABYY_EP-SSMSF128AACS_SQF-S25U8-128G-SAE_A52.255LHB.00246_AP-FD25C23E0064GS-5TM_AP-FD25C23E0128GS-W5TM_AP-FM008GD2505S-TW1M_AP-FM008GD2505S-T1H_APM256GMFFN-4BTM1GW_APM2T42SM22032GFN-4FTM_APM2T80SM21256GAS-4BTMG_APS297F064G-4BTM1GF_APM016GNEAN-4ETM1_AF8GSSHI-VACXP_AF32GSMEL-VAEIP_AF256GSMEL-VABIP_AF16GSSIA-VAAXP_ AF32GSSHI-VACXP_AF240GSTIC-7BEXP_AF480GSTJA-8BEIX_GLS86FP512G3-I-BZ000_GLS87BP001T3-C-BZ200