



CUSTOMER DRAWING

PART NUMBER: DCM-USB SERIES

USB 2.0 TYPE A

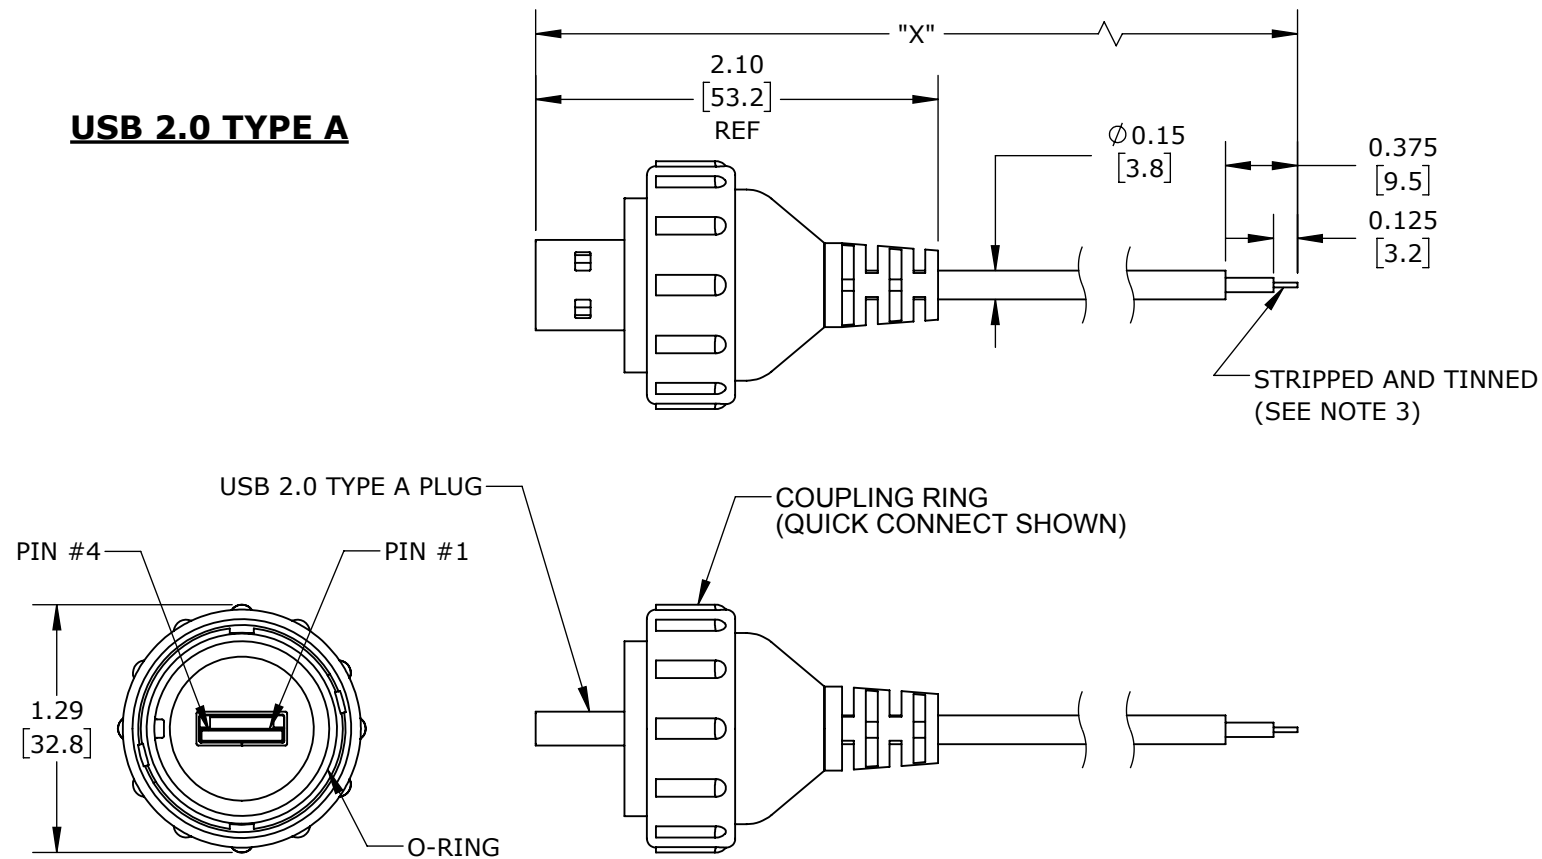

USB 2.0 TYPE B

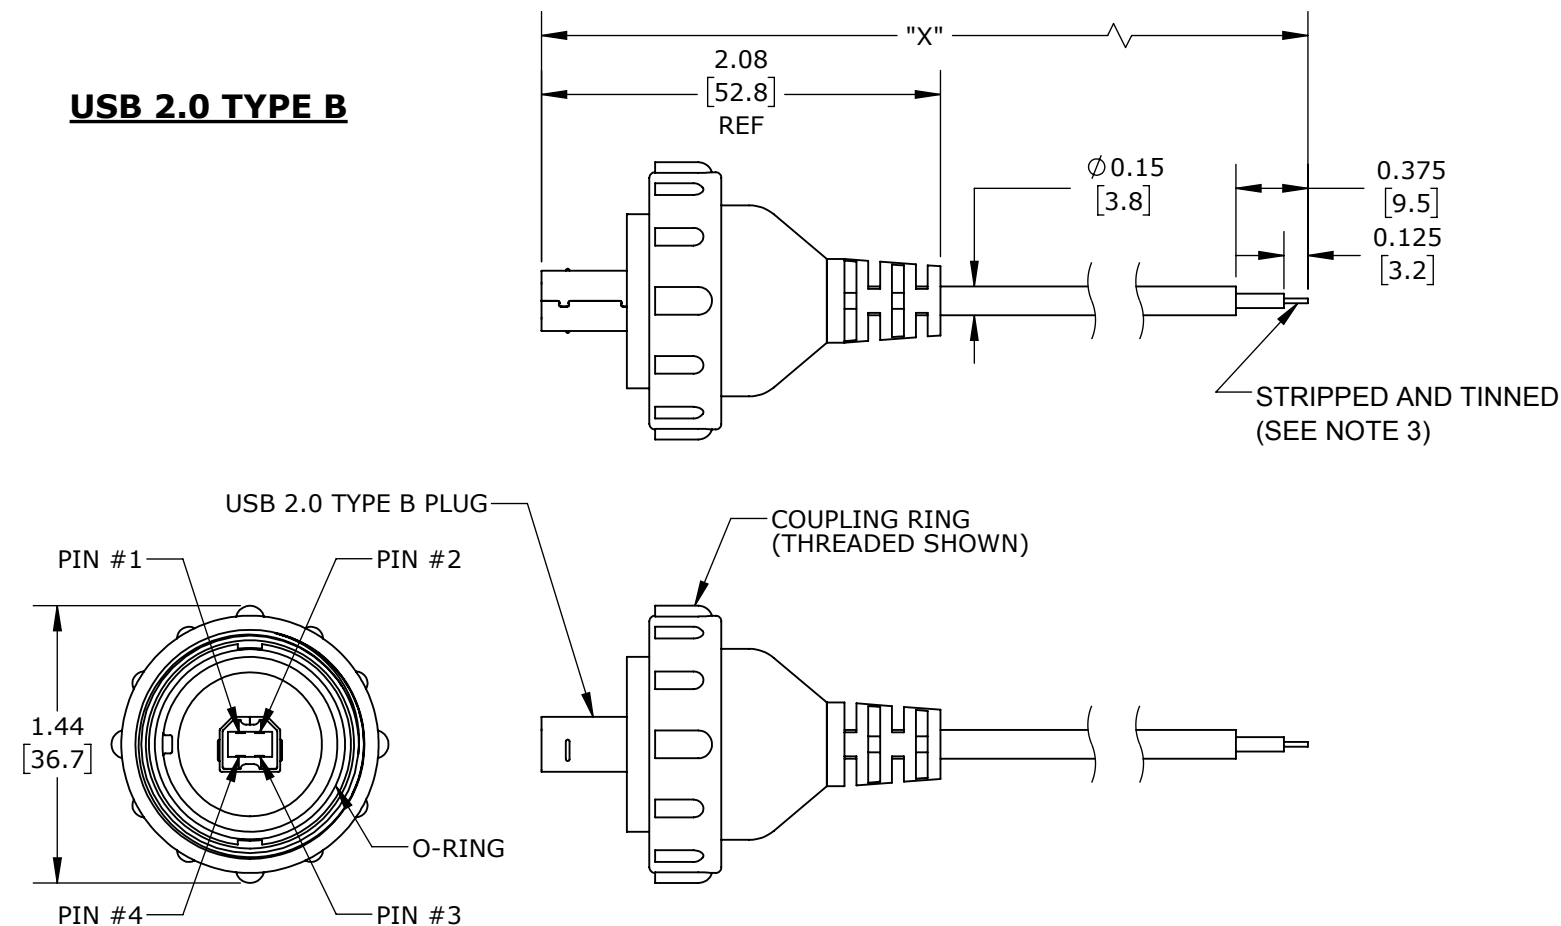

PART NUMBER	USB 2.0 TYPE	COUPLING TYPE	CABLE LENGTH "X"
DCM-USBAB-R5	A	QUICK CONNECT	195.0 ± 3.0 [4953.0 ± 76.2mm]
DCM-USBAT-R5	A	THREADED	195.0 ± 3.0 [4953.0 ± 76.2mm]
DCM-USBBB-R5	B	QUICK CONNECT	195.0 ± 3.0 [4953.0 ± 76.2mm]
DCM-USBBT-R5	B	THREADED	195.0 ± 3.0 [4953.0 ± 76.2mm]

NOTES:

1. COUPLING RING AND O-RING ARE SHIPPED ASSEMBLED TO THE CABLE.
2. DIMENSIONS SHOWN ARE IN INCHES [mm].
3. THE CABLE END COMES STRIPPED AND TINNED. THIS IS TYPICAL FOR ALL BREAKOUTS.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS WITH TWO DECIMAL PLACES HAVE TOLERANCES OF ±0.02 [±0.5mm].

MATERIALS:

PLUG OVERMOLD BODY & FLEX: THERMOPLASTIC, BLACK
 COUPLING RING: THERMOPLASTIC, BLACK
 O-RING: ELASTOMER, RED
 USB PLUG:
 INSULATOR: THERMOPLASTIC, WHITE
 CONTACTS: COPPER ALLOY, GOLD PLATED
 SHIELD: COPPER ALLOY, TIN PLATED
 CABLE:
 OUTER JACKET: PVC, BLACK
 CONDUCTORS: TINNED COPPER, 28 AWG

ELECTRICAL:

CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM
 CONTACT CURRENT RATING: 1.5 A MINIMUM
 INSULATION RESISTANCE: 1000 MEGAOHMS MINIMUM
 WITHSTANDING VOLTAGE: 500VAC FOR 1 MINUTE

PRODUCT RATING:

IP66 WHEN MATED
 USB CABLE: USB 2.0

OTHER:

OPERATING TEMPERATURE: 0 °C TO +50 °C
 STORAGE TEMPERATURE: -20 °C TO +60 °C

USB 2.0 CABLE WIRING	
PIN	CABLE COLOR
1	RED
2	WHITE (TWISTED PAIR)
3	GREEN (TWISTED PAIR)
4	BLACK
SHIELD	BRAID

CUSTOMER DRAWING

RoHS COMPLIANT

0A	JGK	6/04/13	DRAWING CREATED PER PROJECT #09013.	
REV.	INIT.	DATE	DESCRIPTION	
	JGK	6/04/13	ORIG. DRAWN BY:	DATE: 6/04/13
			CHECKED BY:	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			<p>601 E. WILDWOOD VILLA PARK, IL 60181</p>	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 ANGLES ±1° FRACTIONS ±1/16				
APPROVED BY:			SCALE	SIZE
			1:1	B
			SHEET	1 OF 1
FILE: DCM-USB SERIES_CD			DIRECTORY:	SLW
TITLE: USB 2.0 OVERMOLDED CABLE SERIES TYPE A & B DATA-CON-X			CUSTOMER: STANDARD PRODUCT	
PART NUMBER: DCM-USB SERIES			REV 0A	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:

Click to view products by [Switchcraft](#) manufacturer:

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [17-200261](#) [AC102012-1](#) [AC102012-2](#) [FTP-629Y601](#) [45-1345-15](#) [45-1358-15](#) [45-1363-15](#) [IP-USB1\(C10\)S-RW](#) [CABLE/RTP/USB/DT](#) [45-1351-15](#) [45-1357-15](#) [45-1433-1](#) [687680278](#)
[USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [USBFTV2SA2N05A](#) [MDM9PH004B](#) [FTP-629Y401](#) [FTP-628Y302](#) [FTP-628Y402](#)
[CSMNB9MF-5](#) [FNY-W6022](#) [UA-30AMF-SD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [17-200641](#) [UES-1001A160](#) [UES-1003A160](#)
[USBFTVX7SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F*2 to 2.54 2*5P-SH L=400mm](#) [68784-0075](#)
[MINI-SCREW-USB-DATACABLE](#) [19800-010500-200-RS](#) [103-1092-BL-F0050](#) [103-1020-BL-00100](#) [103-1092-BL-F0200](#) [103-1092-BL-F0100](#) [105-1092-BL-00300](#) [105-1092-BL-00200](#) [105-1031-BL-00200](#)