

HS SERIES
DURA-PULL™
PUSH-PULL
CONNECTORS



Switchcraft®
CONXALL®

HARSH ENVIRONMENT CONNECTIVITY SOLUTIONS

Durable nickel plated brass housing is sealed to IP68



“Push-Pull” locking mechanism is easy to operate while eliminating accidental disconnection



Available with up to 9 contacts



Cable to cable in-line connector also available

FEATURES


- Easy, blind mating
- Compact, 1/2" connector size
- Waterproof to IP68
- 360 ° EMI Shielding
- Available with #20 contacts or #26 contacts
- Flush mounting front mount panel connector
- Contacts can be soldered or crimped (shipped unassembled, assembly tools available)
- Optional IP68 sealed caps available
- Three cable clamp sizes accommodate a wide range of cable diameters up to 5.5mm

APPLICATIONS


- Medical devices
- Audio connections
- Outdoor data acquisition devices
- Test and Measurement
- Agriculture electronics
- Safety and Security
- Harsh environments
- General electronic applications



OVERALL DIMENSIONS

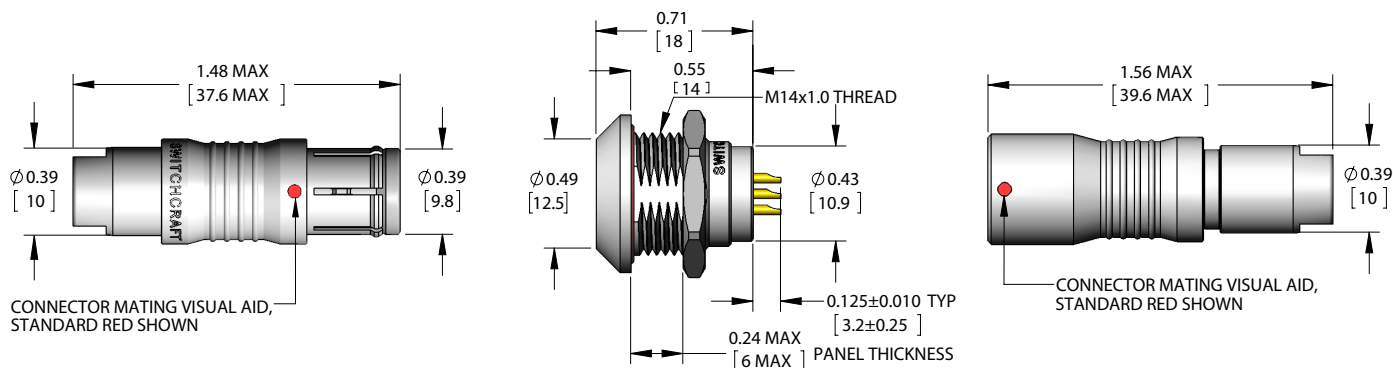

CONTACT LAYOUTS (REAR/WRING SIDE) / RECOMMENDED PANEL CUTOUT

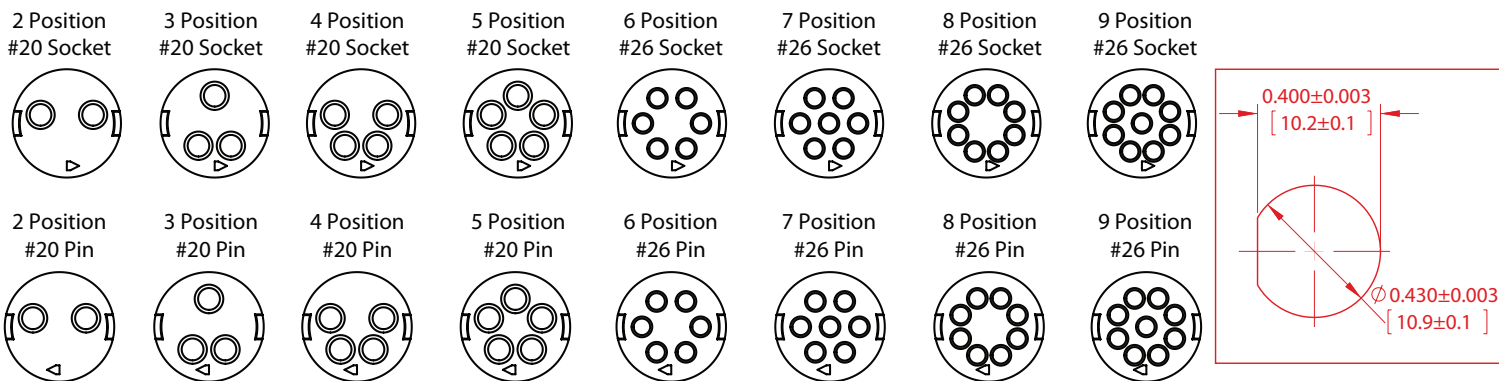

ORDERING CODE

HS2 X X X XX X - X

HS2Series

Connector Type:

- C - Cable-End
- P - Panel Mount
- L - Cable-to-Cable

of contacts:

- 2-5 for #20
- 6-9 for #26

Gender:

- M - Male (Pin)
- F - Female (Socket)

Options:

- B - Rear Mount (panel only)
- K - Kit Packaging (one unit/bag)
- A - Factory Installed Contacts
- [BLANK] - Bulk Packaging

Clamp Set per Cable O.D. Range
for Cable-End and Cable-to-Cable only:

- A - 0.110 - 0.140 [2.8 - 3.6]
- B - 0.140 - 0.180 [3.6 - 4.6]
- C - 0.180 - 0.216 [4.6 - 5.5]

Sealing Caps (Optional)

Cable End: **HS2CCAP**

Panel: **HS2PCAP**

Cable to Cable: **HS2LCAP**

Contact Size:

- 20 - 20, 22, 24, 26 AWG wires
- 26 - 26, 28, 30 AWG wires



SPECIFICATIONS

MECHANICAL:

Mating / Locking Type:	Push-Pull automatic locking/unlocking
Life:	5,000 cycles minimum
Operating Forces:	10 lb. [44.5 N] max. Insertion/Withdrawal
Vibration:	Mil-Std 202G Method 201A
Panel Hex Nut Tongue:	40 in-lb [4.5 Nm] maximum
Cable Securing System:	Threaded on metal clamp

ELECTRICAL:

Voltage Rating:	125 V AC/DC for 2-5 contacts 30 V AC/DC for 6-9 contacts
Current Rating:	10A max for 2 position 2A max for 9 position Refer to website for detailed information
Insulation Resistance:	1000 MΩ minimum
Contact Resistance:	10 mΩ typical

ENVIRONMENTAL:

Temperature Limits:	-40°C to +135°C (-40°F to +275°F)
Operating Temperature:	Refer to website for detailed information
Moisture Resistance:	Mil-Std 202G Method 106G
Insulation Resistance:	Mil-Std 202G Method 302
Thermal Shock:	Mil-Std 202G Method 107G
Salt Atmosphere :	Mil-Std 202G Method 101E
Ingress Protection :	IP66, IP67, IP68 per IEC60529, NEMA 250 6P

MATERIAL:

Outer Shell:	Copper Alloy, electroless nickel plated
Hex Nut:	Copper Alloy, nickel plated
Interior Metal Components:	Copper Alloy, nickel plated
Ground Spring Washer:	Stainless Steel
Electrical Insulator:	Medical Technology LCP, natural
Seal O-rings:	Silicone, red
Contacts:	Copper Alloy, gold plated



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Push Pull Connectors](#) category:

Click to view products by [Switchcraft](#) manufacturer:

Other Similar products are found below :

[6407-249V-11273P](#) [6408-201V-13273](#) [6408-202V-13343](#) [6408-202V-17343](#) [D38999/20ZJ24SA](#) [EZG.0B.309.CLN](#) [FFA.2S.310.ZLA](#)
[FGJ.1B.304.CLLD76](#) [FGJ.1B.306.CWLD72](#) [FGJ.3B.304.CYMD10Z](#) [FGJ.3B.304.CYMD82Z](#) [FHG.1B.303.CYCZ](#) [PCS.01.250.DLLE24](#)
[PHG.0K.305.CYMC40Z](#) [PHG.1K.308.CLLK85](#) [PKG.M0.6BL.LZ](#) [PLC.M1.0SL.LA](#) [GMA.10.290.DN](#) [GMA.3B.090.DA](#)
[PRG.M0.6GL.LC52GZ](#) [PSA.1S.275.CTLC66](#) [ABF.1S.250.NTA](#) [133020F](#) [1331ER193MZ](#) [1332M107MZ](#) [DTS26Z19-32JA-LC](#) [DTS26Z19-](#)
[32SA](#) [DTS26Z19-32SA-LC](#) [EAJ.1B.306.CWA](#) [ECG.XB.312.CLL](#) [1589430-2](#) [EEA.0B.305.CLN](#) [EEA.0B.309.CLL](#) [ELF.00.250.NTL](#)
[BRR.2S.200.PZVG](#) [HR10A-P](#) [CAH.M34.SLL.C72GZ](#) [CAJ.M34.SLL.C72GZ](#) [300500](#) [EXG.0B.309.HLN](#) [FFB.1S.250.CLAC27](#)
[FGA.2B.306.CYCD92](#) [FGA.2B.306.CYCD92Z](#) [FGJ.3B.308.CLLD72Z](#) [FHG.1B.303.CYCD62](#) [FLC.00.250.CTAC27](#) [FLC.00.250.CTAC31](#)
[PCS.01.250.DLLE31](#) [PKA.M1.0TL.LG](#) [PKC.M0.7GL.NG](#)