




- NOTES:
1. PARTS TO BE BULK PACKED.
  2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.  
ALL SOLDER CUPS ARE TO BE FACING TOP KEY.
  3. ALL DIMENSIONS ARE REFERENCE ONLY  
DIMENSIONS IN BRACKETS [ ] ARE METRIC.

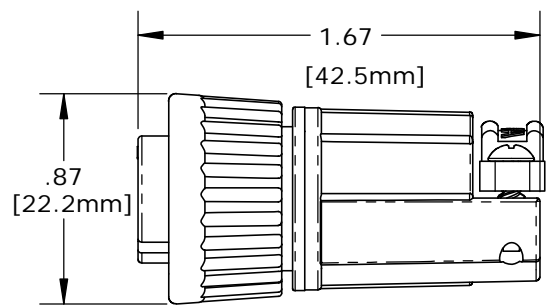


ASSEMBLED VIEW SHOWN  
WITH STANDARD COUPLING RING

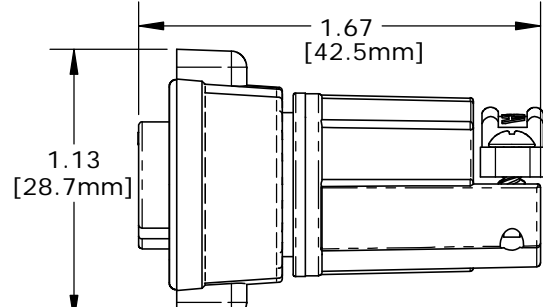


ASSEMBLED VIEW SHOWN  
WITH WINGED COUPLING RING

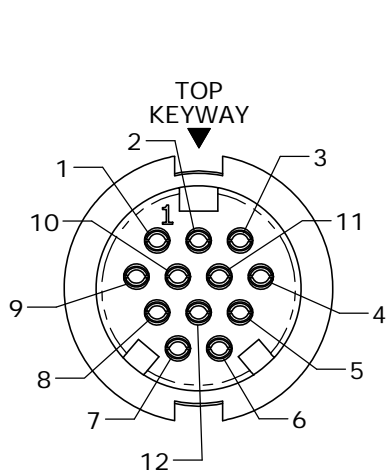




FACE VIEW  
W3282-12SG-5XX(W)

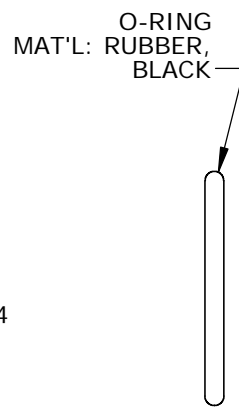


CABLE INSERT, FEMALE  
MAT'L: UV THERMOPLASTIC,  
BLACK

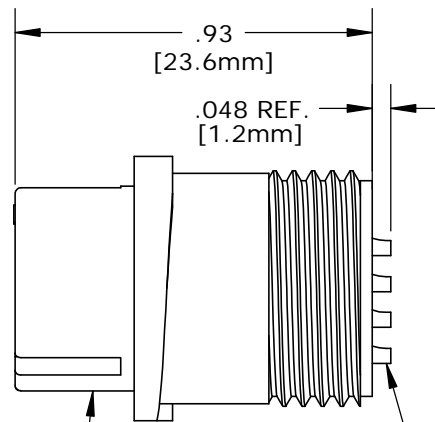


#20 SOCKET CONTACTS  
SOLDER CUP,  
GOLD PLATED  
SEE NOTE 2

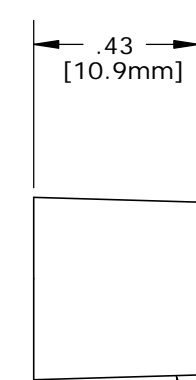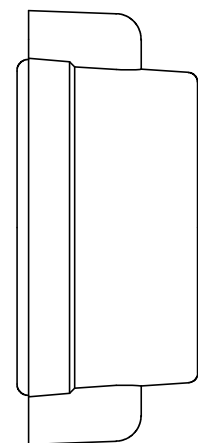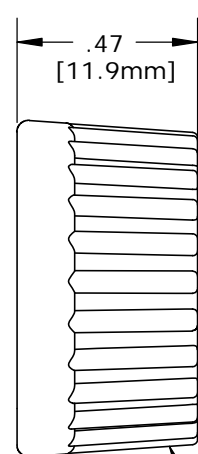


GROMMET,  
MAT'L: RUBBER,  
BLACK  
FOR CABLE O.D.  
SEE TABLE

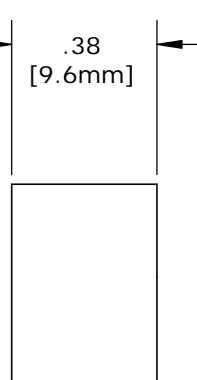


SLEEVE  
MAT'L: THERMOPLASTIC,  
BLACK

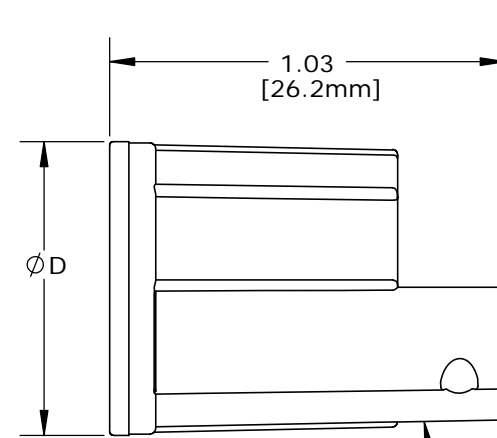


BACKSHELL  
MAT'L: UV THERMOPLASTIC,  
BLACK

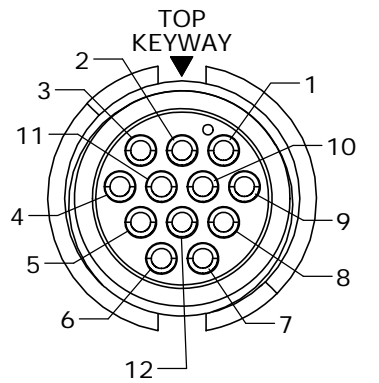


WIRE VIEW

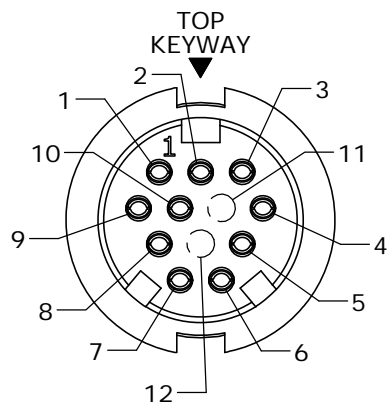


FACE VIEW  
W3282-10SG-5XX(W)

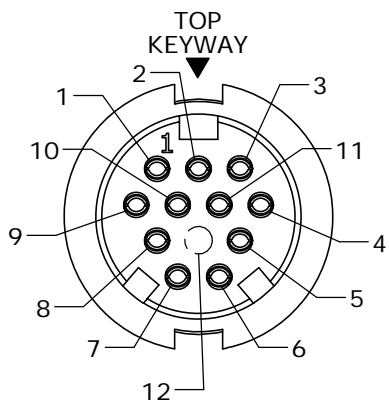

FACE VIEW  
W3282-11SG-5XX(W)



ASSEMBLED VIEW SHOWN  
WITH STANDARD  
COUPLING RING



ASSEMBLED VIEW SHOWN  
WITH WINGED  
COUPLING RING

KIT PART NO.	GROMMET SIZE TO FIT CABLE O.D.	DIA. "D"
W3282-1XSG-518(W)	0.18 - 0.20 [4.6-5.1mm]	Ø0.77 [19.6mm]
W3282-1XSG-521(W)	0.21 - 0.23 [5.3-5.8mm]	Ø0.77 [19.6mm]
W3282-1XSG-524(W)	0.24 - 0.27 [6.1-6.8mm]	Ø0.77 [19.6mm]
W3282-1XSG-528(W)	0.28 - 0.29 [7.1-7.4mm]	Ø0.77 [19.6mm]
W3282-1XSG-530(W)	0.30 - 0.32 [7.6-8.1mm]	Ø0.77 [19.6mm]
W3282-1XSG-535(W)	0.35 - 0.40 [8.9-10.2mm]	Ø0.83 [21.1mm]

(WINGED COUPLING RING OPTION)  
NO. OF CONTACTS

#4 HI/LO SCREW  
MAT'L: STAINLESS STEEL

BACKSHELL STRAP  
MAT'L: UV THERMOPLASTIC,  
BLACK

KIT P/N	NO. OF CONTACTS
W3282-10SG-5XX	(10) - #20
W3282-11SG-5XX	(11) - #20
W3282-12SG-5XX	(12) - #20
W3282-10SG-5XXW	(10) - #20
W3282-11SG-5XXW	(11) - #20
W3282-12SG-5XXW	(12) - #20

ADD W SUFFIX FOR WINGED COUPLING RING  
OPTION

W3282-1XSG-5XX(W)

GROMMET SIZE  
SEE P/N LIST  
NO. OF CONTACTS

#### CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL  
INFORMATION PROPRIETARY TO CONXALL  
CORPORATION. ANY REPRODUCTION,  
DISCLOSURE, OR USE OF THIS  
DOCUMENT /INFORMATION IS EXPRESSLY  
PROHIBITED UNLESS AUTHORIZED IN  
WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

A	PAK	08/15/19	DRAWING CREATED & RELEASED PER DOR 10-2523JS-1	
REV.	INIT.	DATE	DESCRIPTION	
	PAK	10/01/14	ORIG. DRAWN BY: DATE: 10/01/14	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	
UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 ANGLES ±1° FRACTIONS ±1/16			SCALE NTS	SHEET 1 OF 1
▷ - CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: W3282-1XSG-5XX	DIRECTORY: SLW
			TITLE: CABLE CONNECTOR KIT #20 SOCKET CONTACTS (SOLDER), BACKSHELL CLAMP MULTI-CON-X, E-KEY, WEATHER RESISTANT STANDARD PRODUCT	
			PART NUMBER: W3282-1XSG-5XX(W)	REV A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [Switchcraft](#) manufacturer:*

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)  
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-474014-05S](#) [75-](#)  
[474618-01S](#) [75-474618-04P](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-516](#) [8280-7PG-](#)  
[519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#) [120-1833-000](#)  
[QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU 1000B BULK](#) [RD10A16-19-P6CS051/1](#) [RD10A20-31-](#)  
[P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#) [1301860202](#) [1301240268](#)