



产品承认书
SPECIFICATION FOR APPROVAL


客户名称 <i>CUSTOMER NAME.</i>	-----
产品类型 <i>PRODUCT TYPE</i>	贴片功率电感
客户料号 <i>CUSTOMER P/N</i>	4520
顺翔诺料号 <i>SXN P/N</i>	SMCM4520 SERIES
文件编号 <i>FILE NO.</i>	SP-18121101

客户承认/ <i>CUSTOMER ACCEPTED</i>		
承认 <i>APPROVED</i>	确认 <i>CHECKED</i>	承办 <i>DESIGN</i>
批注/ <i>REMARK</i>		

批准 <i>APPROVED</i>	确认 <i>CHECKED</i>	作成 <i>DESIGN</i>
业务专线：0755-23760960 13713798056 官 网：www.sxndz.com 邮 件：13713798056@163.com 地 址：深圳市龙华福城街道福前路下新塘37号深澜产业园3栋3楼		


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	4520	版别 REV.	A
产品类型 PRODUCT TYPE	贴片功率电感	顺翔诺品名 SXN P/N	SMCM4520 SERIES	文件编号 FILE NO.	SP-18121101

一.尺寸图/DIMENSION (单位/UNIT : mm)

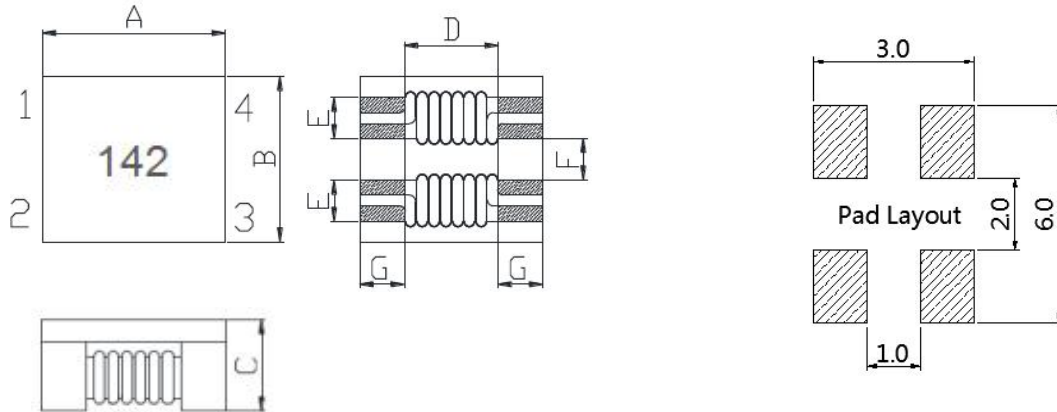

ITEM	A	B	C	D	E	F	G			
DIM	4.7	4.5	2.0	2.70	0.8	1.25	1.0			
TOLE	±0.5	±0.5	Max	Typ	Typ	Typ	Typ			

二.电路图/SCHEMATIC



三.注意事项/NOTE :

- 1.产品印黑字
- 2.崩缺面积直径小于0.3mm为允收




四.电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Common mode Impedance (Ω @100MHz)		DCR (mΩ) max.	IDC (A)max.	Rated Volt. (Vdc)max.	IR (Ω) min.	MARK
	Min	Typ					
SMCM4520-900T	60 Min	90 Typ	35	2.0	50	10M	900
SMCM4520-151T	90 Min	150 Typ	40	1.9	50	10M	151
SMCM4520-231T	180 Min	230 Typ	45	1.8	50	10M	231
SMCM4520-301T	200 Min	300 Typ	45	1.7	50	10M	301
SMCM4520-401T	300 Min	420 Typ	50	1.5	50	10M	401
SMCM4520-701T	500 Min	700 Typ	59	1.4	50	10M	701
SMCM4520-901T	650 Min	900 Typ	68	1.3	50	10M	901
SMCM4520-102T	800 Min	1000 Typ	68	1.3	50	10M	102
SMCM4520-122T	1000 Min	1200 Typ	74	1.2	50	10M	122
SMCM4520-142T	1200 Min	1400 Typ	81	1.2	50	10M	142





- (1).Rated Current: Temp.rise 40°C Typ
- (2).Operating Temperature: -40°C up to +125°C
- (3).Storage Temperature: -20°C up to +40°C, 75% RH max.

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	4520	版别 REV.	A
产品类型 PRODUCT TYPE	贴片功率电感	顺翔诺品名 SXN P/N	SMCM4520 SERIES	文件编号 FILE NO.	SP-18121101

五.特征曲线/CHARACTERISTICS(REFERENCE)

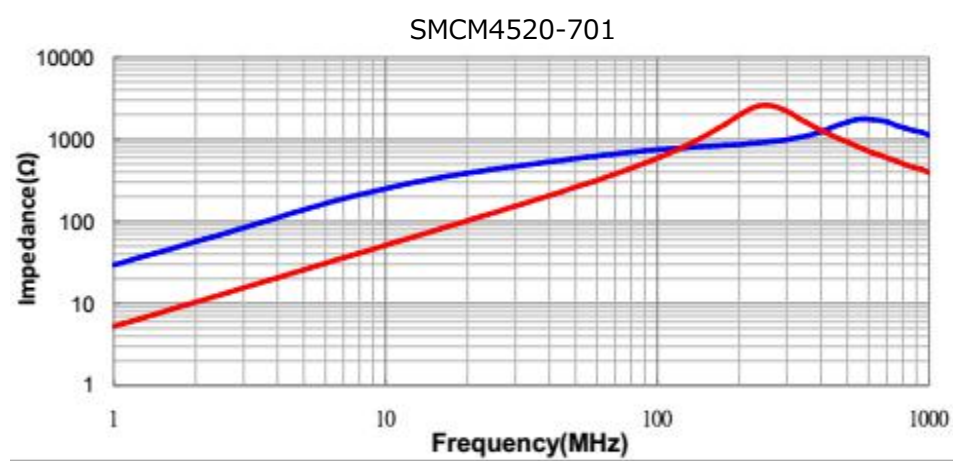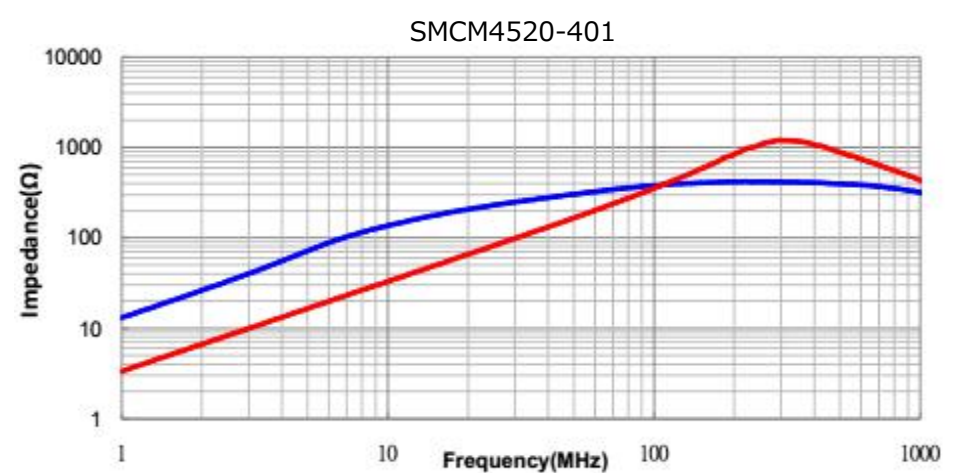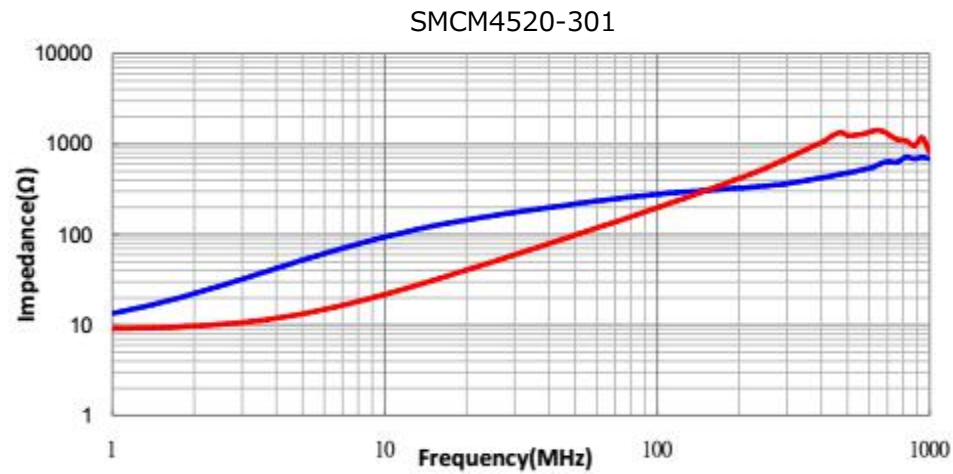


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	4520	版别 REV.	A
产品类型 PRODUCT TYPE	贴片功率电感	顺翔诺品名 SXN P/N	SMCM4520 SERIES	文件编号 FILE NO.	SP-18121101

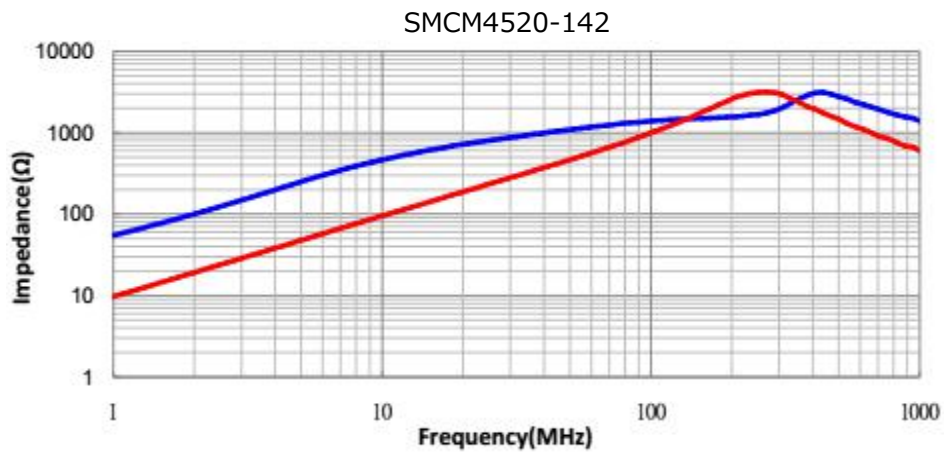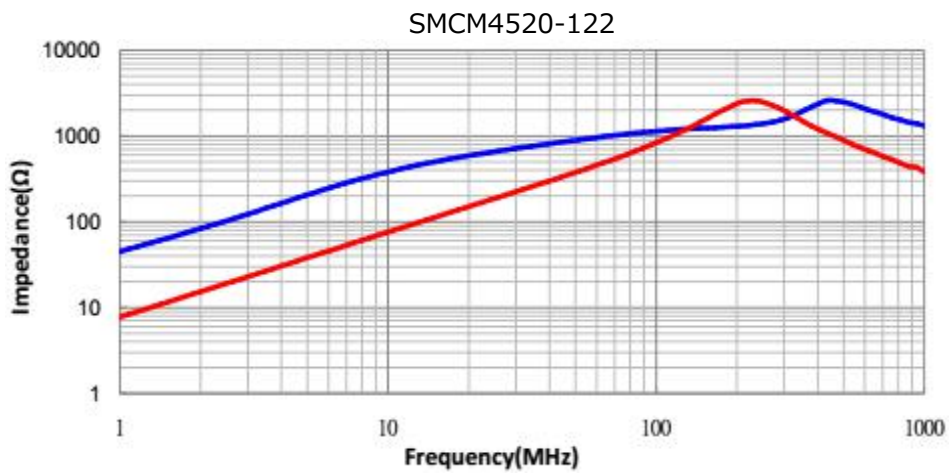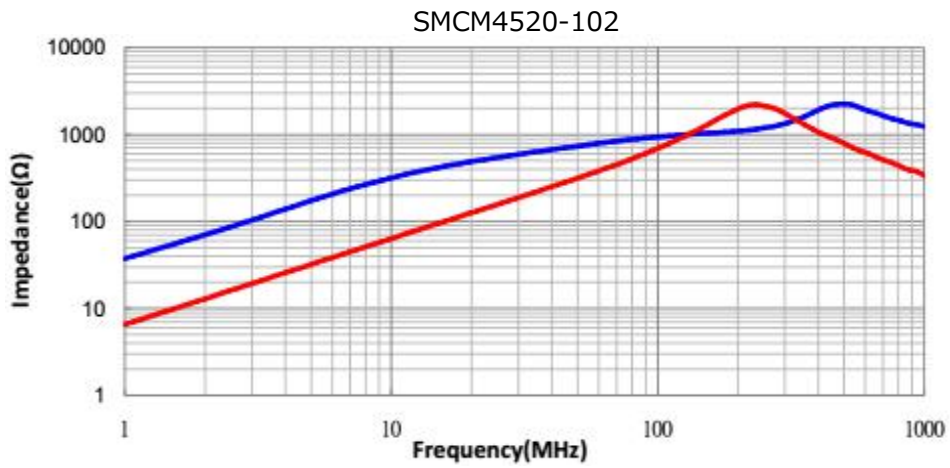

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	4520	版别 REV.	A
产品类型 PRODUCT TYPE	贴片功率电感	顺翔诺品名 SXN P/N	SMCM4520 SERIES	文件编号 FILE NO.	SP-18121101


六.可靠性测试/RELIABILITY TESTING

Operating Temperature	- 40 to +125 °C (Contain Heating coil)
Appearance Inspection	No external defects by visual inspection
Terminal Strength	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. (Refer to figure at right)
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core
Temperature characteristics	Inductance coefficient (0~2,000) × 10 / °C (- 40~ + 125 °C)
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition



A test is made under the above mentioned condition , and it is kept for 2 hours in the normal

IR Reflow profile

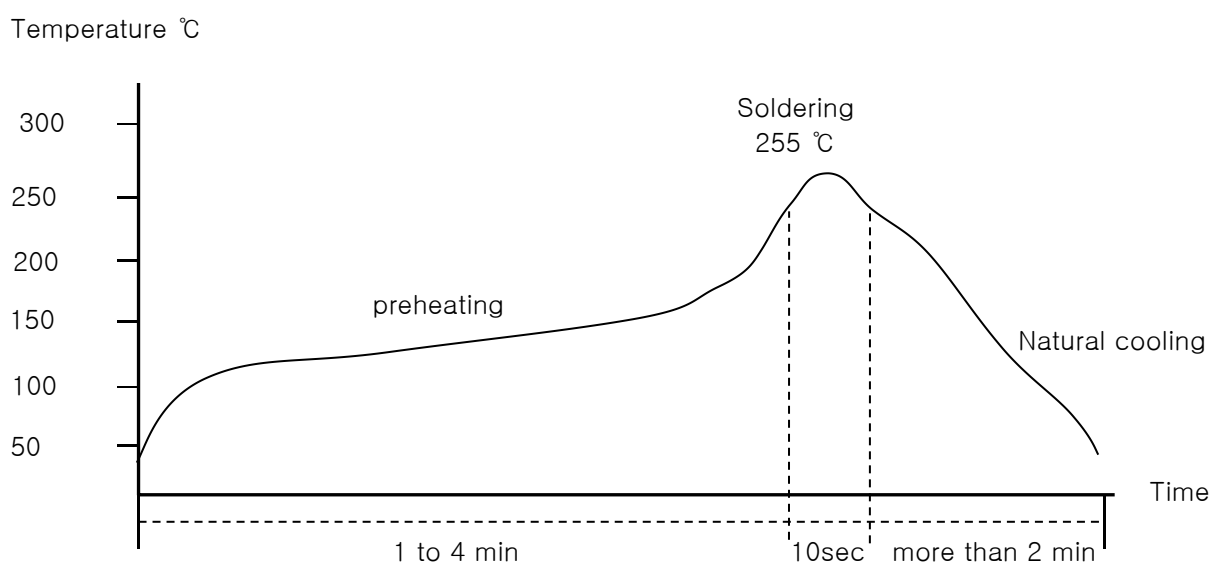



Temperature and humidity . After that , no mechanical and electrical defect should be found .

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	4520	版别 REV.	A
产品类型 PRODUCT TYPE	贴片功率电感	顺翔诺品名 SXN P/N	SMCM4520 SERIES	文件编号 FILE NO.	SP-18121101





七.材料清单/MATERIAL LIST

NO.	ITEM	DESCRIPTION
1	CORE	FERRITE
2	WIRE	P180 G1
3	COVER	MYLAR
4	TIN	107H
5	INK	BLACK

八.包装规格/PACKING SPECIFICATIONS

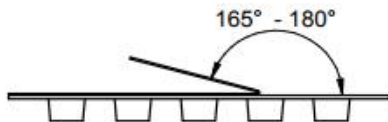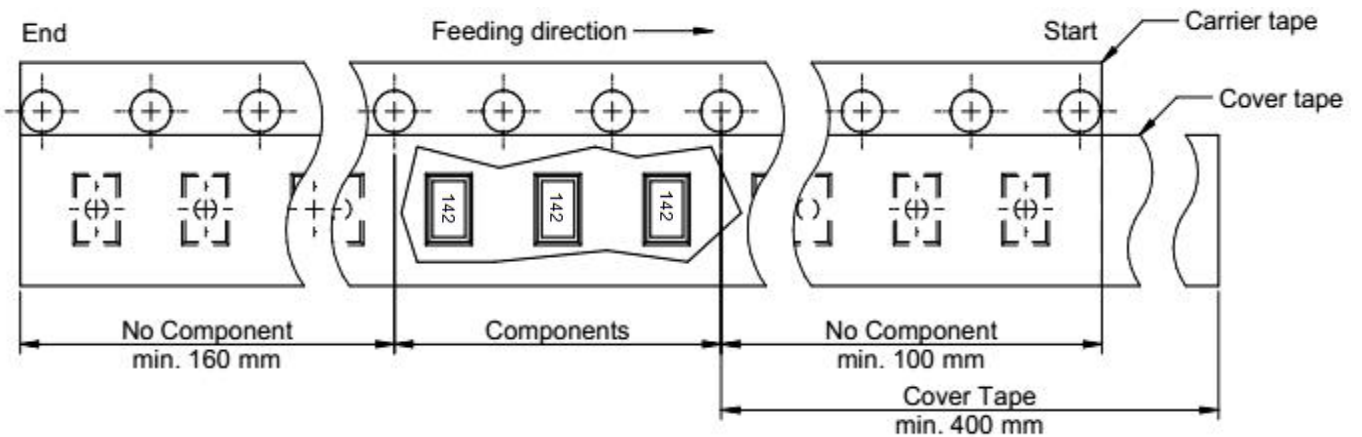

Tape width	Distance	Pull-of force
12 mm	8 mm	10~120g



轮盘：7(直径178mm)
数量：1000PCS/盘

PE袋
数量：4000PCS/袋

内盒
数量：4000PCS/盒

外箱，数量：40000PCS/箱
不足整箱用内盒或填充物装满

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [SXN](#) manufacturer:

Other Similar products are found below :

[RGCMF1210900H3T](#) [B82722A2102N001](#) [UAL21V07012500](#) [UAL24VR06500CH](#) [UALSC0220G0000](#) [UALSC058000000](#)
[UALSC0580J0000](#) [UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU10VR20010](#) [UALSU16VD30030](#) [UALSU16VD40010](#)
[UALSU9H0305000](#) [UALSU9HF030600](#) [UALSU9HF060300](#) [UALSU9HR050340](#) [UALSU9VD070100](#) [UALSU9VR070170](#) [5701610000](#)
[CM7060M132R-10](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9V0701000](#) [UALSU9HR030900](#)
[UALSU9HF050500](#) [UALSU9H0701000](#) [UALSU9H0208000](#) [UALSU9H0110000](#) [UALSCF25081300](#) [UALSC0305GS000](#)
[UALSC0120G0000](#) [UAL24VK06450CH](#) [UAL11VL1105000](#) [RN112-3.6-02-0M4](#) [RN114-1.2-02-10M](#) [RN122-0.6-02-47M](#) [RN122-3-02-4M5](#)
[RN142-1-02-33M](#) [RN214-2.5-02-3M3](#) [RN112-2-02-1M0](#) [RN143-6-02-1M8](#) [RN214-0.8-02-27M](#) [RN242-1.4-02-27M](#) [EXC-X4CH120X](#)
[DLW5BTM102TQ2L](#) [CMF16-153131](#) [CMF23H-273141](#) [744252510](#) [B82793C0253N201](#)