

# MODEL TL-4903



International size reference: AA, ER14505

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)



■ Nominal capacity @ 1 mA, to 2 V	2.4 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	60 mA
■ Maximum 1 sec. pulse capability	120 mA
■ Weight	18 g (0.634 oz)
■ Volume	8 cc
■ Operating temperature range	-55 °C to +85 °C
■ U.L. Component Recognition, MH 12193	

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

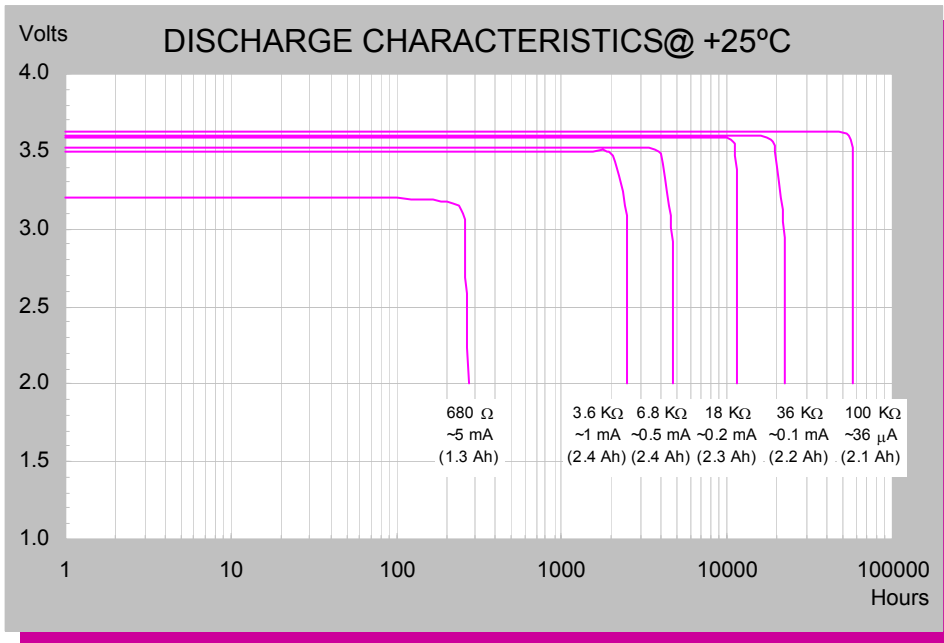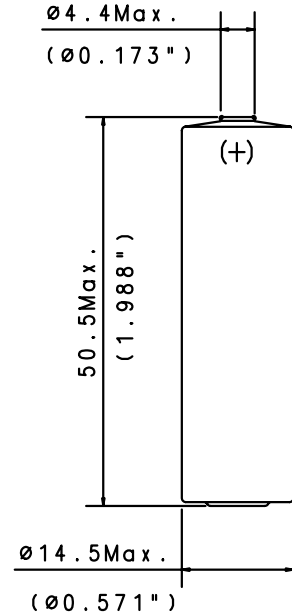

### AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4903-21000
SUFFIX- /T SOLDER TABS	15-4903-31000
SUFFIX- /P AXIAL PINS	15-4903-41000
SUFFIX- /PT2 RADIAL PINS	15-4903-36000
SUFFIX- /TP POLARIZED TABS	15-4903-52000
SUFFIX- /PT POLARIZED TABS	15-4903-53000

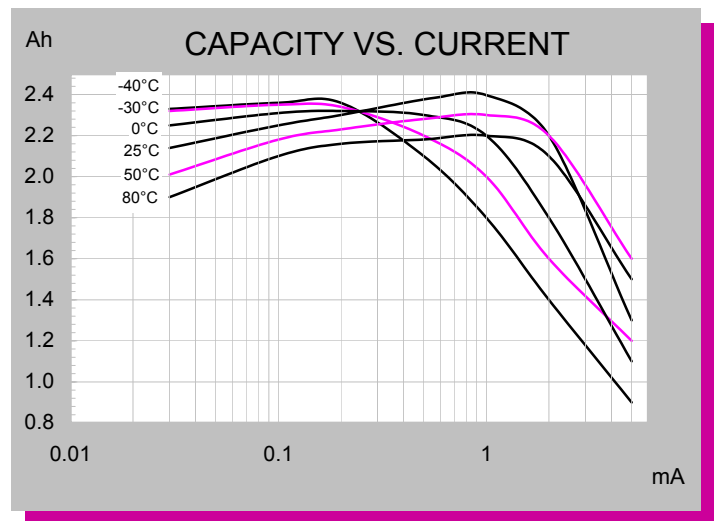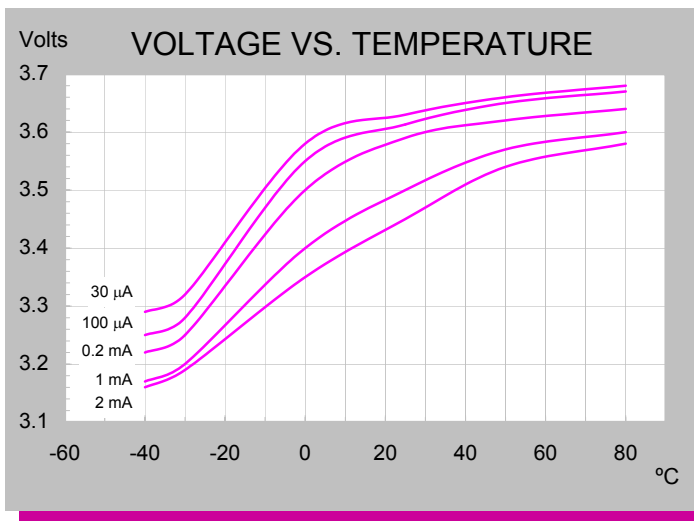

**XOL - Extended Operating Life**

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 01/07 ECN1501458

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electronic Battery](#) category:*

*Click to view products by [Tadiran](#) manufacturer:*

Other Similar products are found below :

[R88A-BAT02W](#) [TL5902/T](#) [76000912](#) [TL-5104/SBP](#) [PT-2100H/PT](#) [LR03AD/4P](#) [13331-0001](#) [13299-0001](#) [3G2A9BAT08](#) [R88A-BAT01G](#)

[R88A-BAT01W](#) [G4BATT32](#) [LR03AD/B](#) [LR20AD/B](#) [036506R](#) [BR-2/3ASSPN](#) [LR6AD/2P](#)