

# MODEL TL-4986



International size reference: ER22G75

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 0.5 mA, to 2 V	0.42 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	5 mA
■ Maximum 1 sec. pulse capability	10 mA
■ Weight	6 g (0.211 oz)
■ Volume	2.1 cc
■ Operating temperature range	-55 °C to +85 °C
■ U.L. Component Recognition MH 12193	

## TADIRAN LITHIUM BATTERIES

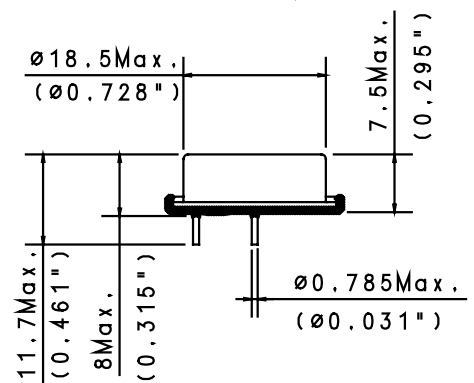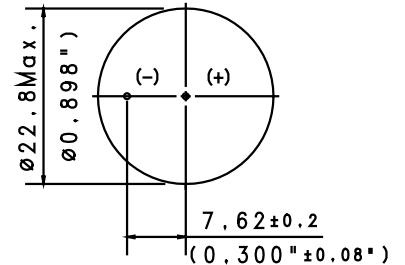

### ADDITIONAL INFORMATION

SUFFIX- /P TIN PLATED NICKEL PINS  
CATALOGUE NO.: 15-4986-43000

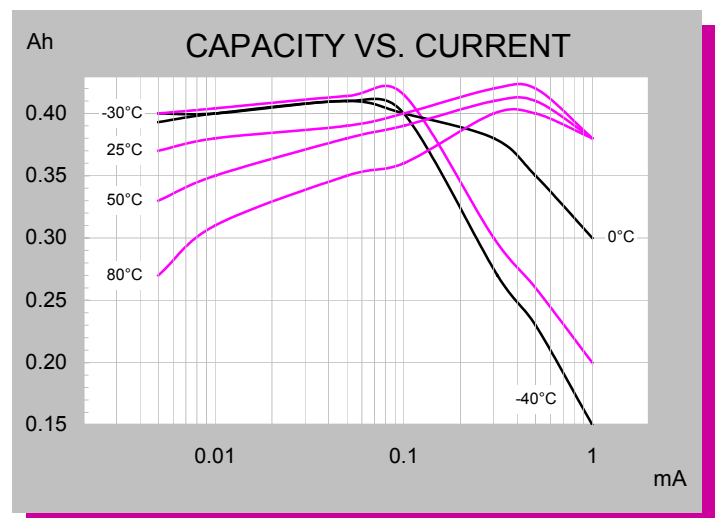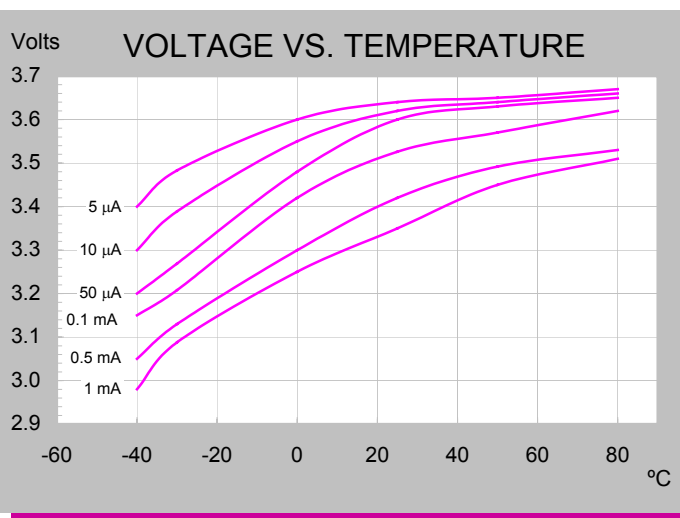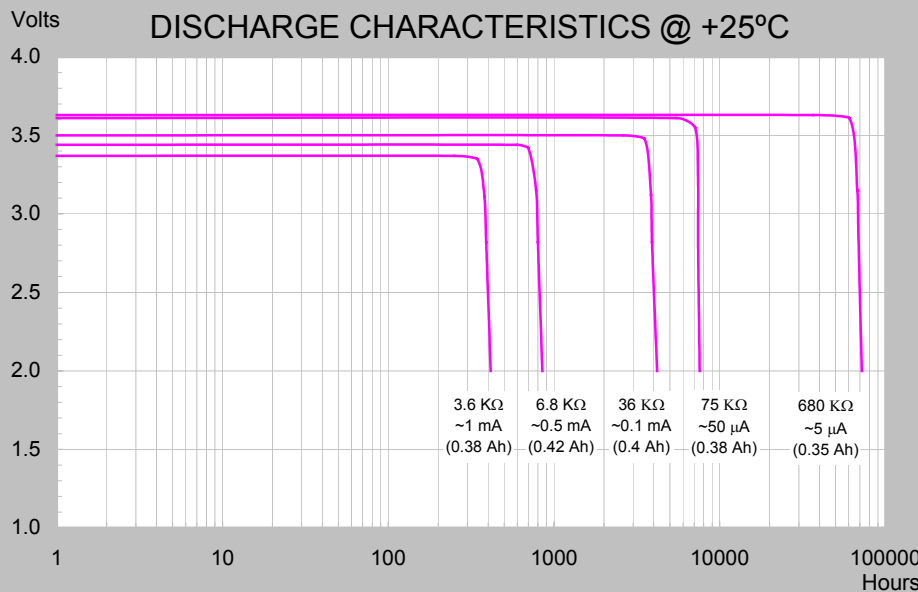

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501186 Rev. E 01/06

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electronic Battery](#) category:*

*Click to view products by [Tadiran](#) manufacturer:*

Other Similar products are found below :

[R88A-BAT02W](#) [TL5902/T](#) [76000912](#) [TL-5104/SBP](#) [PT-2100H/PT](#) [1200297](#) [LR03AD/4P](#) [BR-435/BN](#) [13331-0001](#) [BR-2/3A](#) [13299-0001](#)  
[3G2A9BAT08](#) [R88A-BAT01G](#) [R88A-BAT01W](#) [G4BATT32](#) [LR03AD/B](#) [036506R](#) [BR-2/3ASSPN](#) [2320351](#) [LR6AD/2P](#)